

# CWG 1500

## Surge / Hybrid Generator

IEC / EN 61000-4-5, VDE 0847 4-5

- Voltage pulse 1,2 / 50  $\mu$ s and current pulse 8 / 20  $\mu$ s
- Amplitude 0,2 - 4,4 kV / 0,1 - 2,2 kA
- Control via PC with optional software



**Simple and intuitive operation**

### Overview

The CWG 1500 test generator simulates high-energy interference pulses and is suitable for carrying out EMC tests on systems and equipment in accordance with the IEC / EN 61000-4-5 and similar standards.

The CWG 1500 is a combined surge current / surge voltage generator and generates a standard surge voltage with a waveform of 1.2 / 50  $\mu$ s and a standard surge current with a waveform of 8 / 50  $\mu$ s at no load.

The values for current and voltage are displayed, for evaluation with an oscilloscope BNC outputs for current and voltage are available on the rear panel.

With the built-in single-phase coupling network, the interference pulses / output variables of the hybrid generator can be coupled to the supply lines of the devices under test. The coupling is done by means of discrete coupling capacitors. According to IEC 61000-4-5, 18  $\mu$ F capacitors (balanced coupling) or 9  $\mu$ F / 10  $\Omega$  (unbalanced coupling) with sufficient voltage stability are installed. External coupling networks from Schlöder can also be operated or used for component testing via the HV socket.

All parameters can be set easily and clearly. Up to 32 settings can be activated directly by means of the memory key. By means of the serial interface the control by computer is possible.

### Key facts

- Combined surge current / surge voltage generator
- Generates a standard surge voltage with the waveform 1.2 / 50  $\mu$ s and a standard surge current with the waveform 8 / 20  $\mu$ s
- BNC outputs for current and voltage measurement with an oscilloscope
- Extensive range of accessories available
- Remote control via EMV software possible
- Durable due to high-quality components



# CWG 1500

## Surge / Hybrid Generator


### Technical data

Surge / Hybrid Generator		Single phase integrated coupling network	
Charging voltage	0,2 - 4,4 kV	1-phase, integrated in the generator, coupling of the test pulses to the supply lines of the DUT	
Loading time	≤ 10 sec	Nominal voltage AC	max. 230 V / 16 A 50 / 60 Hz
Number of pulses	1 - 999	Nominal voltage DC	max. 270 V / 16 A
Repetition rate	10 - 990 sec	Phase display	LED red LED green
Phase angle	$\varphi = 0^\circ - 359^\circ$ , 1° steps, net synchr. triggering 50 + 60 Hz	Symmetrical coupling	L - N: 18 $\mu$ F
Polarity	positive, negative, alternating	Asymmetrical coupling	L-PE, N - PE: 9 $\mu$ F + 10 $\Omega$
Trigger	manual or external	Test sample connection	Schuko socket additional laboratory sockets
Interface	RS 232	Earth connection	on the front panel and on the rear
HV Output	unearthed or earth-related		
Memory function	call up test level 1 - 4, max. 32 memories can be selected		
Discharge parameters	display effective discharge voltage and current		
Stored energy	100 Ws max.		
Operating temperature	0 - 40 °C		
Dimensions	19" housing, 3 RU		
Weight	appr. 18 kg		
Supply voltage	100-240 V / 47-63 Hz / 100 VA		


### Technical data – Definition of the parameter IEC / EN 61000-4-5

	Front time $T_f$ $\mu$ s	Duration $T_d$ $\mu$ s
Open-circuit voltage	$T_f = 1,67 \times T = 1,2 \pm 30 \%$	$T_d = T_w = 50 \pm 20 \%$
Short-circuit voltage	$T_f = 1,25 \times T_r = 8 \pm 20 \%$	$T_d = 1,18 \times T_w = 20 \pm 20 \%$

### Technical data : Open-circuit voltage / Short-circuit voltage

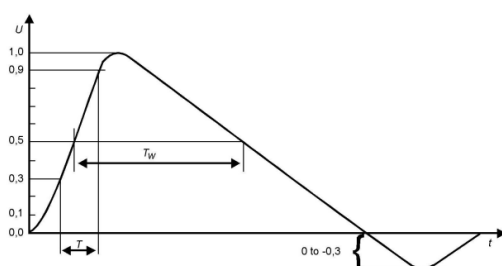

Open-circuit voltage

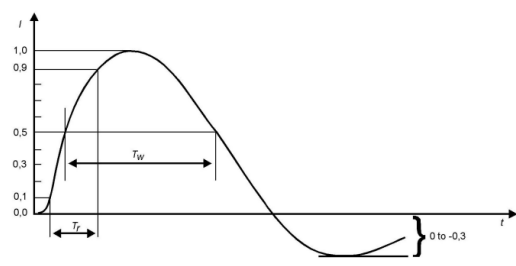


Short-circuit figure



# CWG 1500

## Surge / Hybrid Generator

### Technical data: Functions

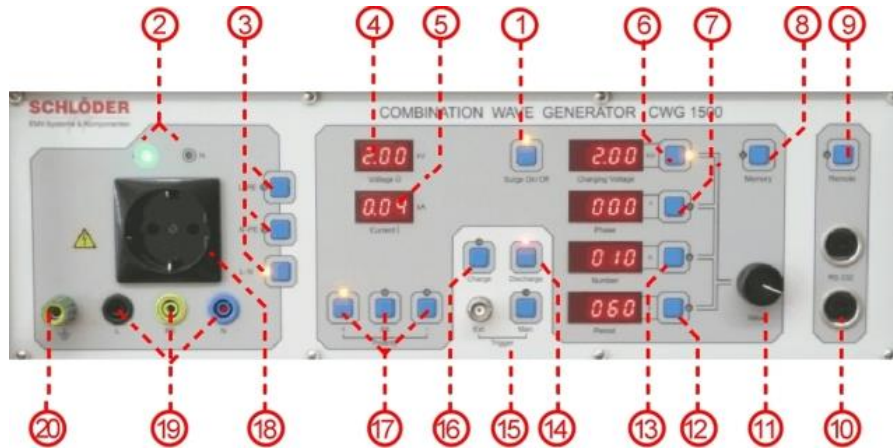

[1]	Surge function on / off	[14]	Discharge: discharging the energy storage
[2]	Phase displays	[15]	Trigger: manual or external
[3]	Selection keys for the coupling paths	[16]	Batch: charging the energy storage device
[4]	Display for discharge / surge voltage	[17]	Polarity
[5]	Display for discharge / surge current	[18]	EUT connection: Schuko
[6]	Open circuit voltage	[19]	EUT connection: Laboratory sockets
[7]	Phase angle	[20]	Earth connection front and rear socket
[8]	Memory function	High voltage output on the rear panel (connection for coupling pliers or 3-phase coupling network )	
[9]	Enable remote control via RS 232		
[10]	RS 232 interface		
[11]	Setting via potentiometer for several functions		
[12]	Repetition rate		
[13]	Number of pulses		



# CWG 1500

## Surge / Hybrid Generator

Options	
CWG 520	3-ph. coupling network 4 x 16 A
CWG 523	3-ph. coupling network 4 x 32 A
CWG 524	3-ph. coupling network 4 x 60 A
CWG 52x - 550	HV models up to 550 VAC L-L
CWG 1525	CDN for 2 unshielded, balanced connecting cables, 1 A
CWG 1526-4	CDN for 2 unshielded, unbalanced connection lines, 4 A
CWG 1526-10	CDN for 2 unshielded, unbalanced connection lines, 10 A
CWG 1528	CDN for 4 unshielded, unbalanced connection lines, 6 A
CWG 550	18 $\mu$ F capacitor in housing
CWG 551	9 $\mu$ F capacitor + 10 $\Omega$ Resistance in housing
CWG 553	0.5 $\mu$ F capacitor + 40 $\Omega$ Resistance in housing
EMV-SOFT	control software for surge, burst and mains interruption generators

All information regarding appearance and technical data correspond to the current state of development at the time of release of this data sheet. We reserve the right to make technical changes. 202007

