

NEW

Four-Quadrant Fast Response Bipolar Power Supply

DJOP series

- ▶ Output voltage: 0V to $\pm 60V$
- ▶ Maximum output power: 50W, 60W
- ▶ Frequency bandwidth: DC to 30kHz

light weight
3kg



DJOPseries

Four-quadrant fast response bipolar power supply



DJOP series is **four-quadrant bipolar power supply which source and sink electric power.**

They can be used in 2-mode of a constant voltage (CV) or a constant current (CC).

Thanks to the original design, phenomenal light weight and compact size power supply, which is 140 mm width, and weigh 3 kg has been achieved. They are ultra compact and high speed, driving output proportional to the input waveform such as a sine wave, triangular wave, saw wave, and square wave. All the models are completely solid-state with output voltage between ± 10 V to ± 60 V.

DJOP series is most appropriate for evaluation test such as solar panels, the instruments driven by battery and the IC which control battery.

Even faster models, the models with function generator and more high power models are available. Contact to local sales office for details.

Applications

- ▶ Suitable to evaluate battery driven equipment to use as a simulated battery
- ▶ Inductive load such as coil and transformer
- ▶ Capacitive load like capacitor
- ▶ Various motor tests
- ▶ Voltage regulation tests for in-vehicle electrical component
- ▶ Evaluation test for solar panel related devices
- ▶ For surface treatment

This product is not designed for charge and discharge of battery.
Please contact nearby sales if unit is used for charge and discharge application.

Features

Response speed

Newly developed DJOP Series is the most appropriate for transient response test with such high power and broad bandwidth.

Four-quadrant action

DJOP Series can be used both as a high speed response DC power supply and as an electronic load.

DC bias

10-turn potentiometer to be used for the output setting volume when used as the DC power supply and for the bias setting when used as AC power supply is equipped.

DC output meter

3-digit digital meter displays the DC value of the output voltage and current. (The option of rms indication is available.)

Compact & light weight

For maximum compactness and light weight, DJOP Series has been improved for small footprint and easy carry.

Constant voltage (CV)/Constant current (CC)

A single switch selects between CV and CC modes.

Wide lineup

Select a model fitting for your applications from the lineup of various output voltage and current.

Complete protective function

Protective function against over voltage/current and protective measures against output short-circuit are completely provided.

Lineup

★ Please consult with our sales office about the specifications except the following list.

Model	Maximum output voltage V	Maximum output current A	Maximum output power W	Frequency bandwidth kHz (-3 dB)	Weight kg
DJOP10-5	±10	±5	50	DC to 30	3
DJOP20-3	±20	±3	60		
DJOP30-2	±30	±2			
DJOP60-1	±60	±1			

Specifications

Input voltage	100 V to 240 Vac ± 10% 50/60 Hz single phase									
Input current	1.5 A max @115 Vac input									
External control voltage (Vcon-in)	-10 V to +10 V (input impedance: more than 10 kΩ)									
Output display (DC value)	Voltage: 3-digit digital meter ±999 Current: 3-digit digital meter ±999									
DC bias	-100% to +100% by 10-turn potentiometer									
Ripple	<CV mode> less than 0.02% rms <CC mode> less than 0.2% rms									
Stability	0.016%/Hr typ.									
Setting accuracy	±0.5% Full Scale									
Distortion	<CV mode> 0.05% <CV mode> 0.5% (at rated output with resistor load)									
Regulation	Input: 0.05% (for ±10% input change) Load: 0.05% (for 10% to 100% load change)									
Temperature coef.	200 ppm/°C									
Output monitor	Output voltage: -10 V to +10 V ±1% Full Scale Output current: -10 V to +10 V ±1% Full Scale Output impedance: 1 kΩ									
Protections	Over voltage protection, over current protection, against short-circuit and blackout (can be canceled with -LN option) Interlock									
Other functions	Remote switch (Output ON/OFF) (with external relay or open collector) <table><tr><td>Output</td><td>Relay</td><td>Open collector</td></tr><tr><td>ON</td><td>SHORT</td><td>V_{CE} ≤ 0.4 V</td></tr><tr><td>OFF</td><td>OPEN</td><td>V_{CE} ≥ 2 V</td></tr></table> Sink Current 1 mA	Output	Relay	Open collector	ON	SHORT	V _{CE} ≤ 0.4 V	OFF	OPEN	V _{CE} ≥ 2 V
Output	Relay	Open collector								
ON	SHORT	V _{CE} ≤ 0.4 V								
OFF	OPEN	V _{CE} ≥ 2 V								
Operating temp.	0°C to +40°C									
Storage temp.	-20°C to +70°C									
Relative humidity	20% to 80%, non condensing									
Accessories	AC input cable 2.5 m (1) (3-pin connector 125 V type) Instruction manual (1)									

Protections

Over voltage protection (O.V.P)

DJOP series is equipped with over voltage protection, which protects load by limiting voltage up to approx. 110% of the rated output voltage even at abnormal conditions.


Over current protection (O.C.P)

DJOP series is also equipped with over current protection, which protects power supplies and load by limiting current up to approx. 110% of the rated output current.

High speed over current protection

DJOP series is provided with 2 types of over current protections, high speed over current protection to limit the pulse current, and standard over current protection to limit the static current.

The standard over current protection limits the static current, responding at around 1 ms. Additional high speed over current protection can limit pulse current of square waveforms or from capacitor at approx. 2 times more current of rating.

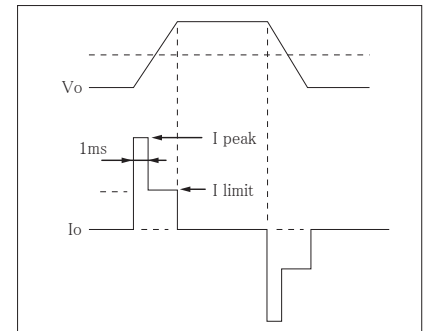



Output range


DJOP series is a bipolar power supply which can perform four-quadrant operation. They can supply (source) and absorb (sink) current in the field of the drawing on the right.

V_o max: rated output voltage

I_o max : rated output current


 AC operation range (with 50 Hz or more frequency, 50% of duty cycle and without any DC bias)

 DC operation range

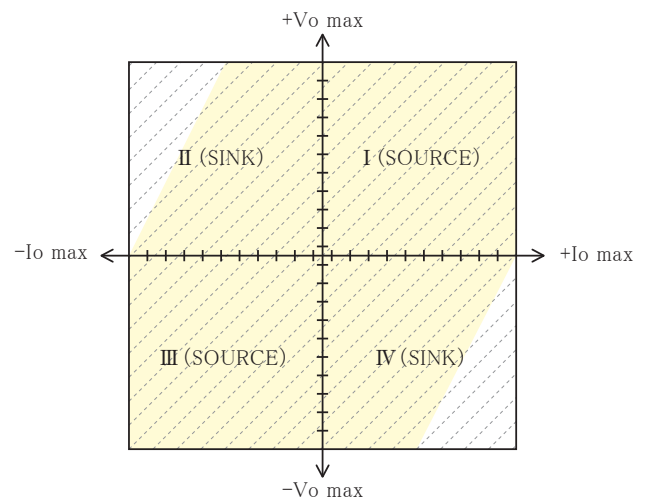


Dimensions inch (mm)/Functions


Front

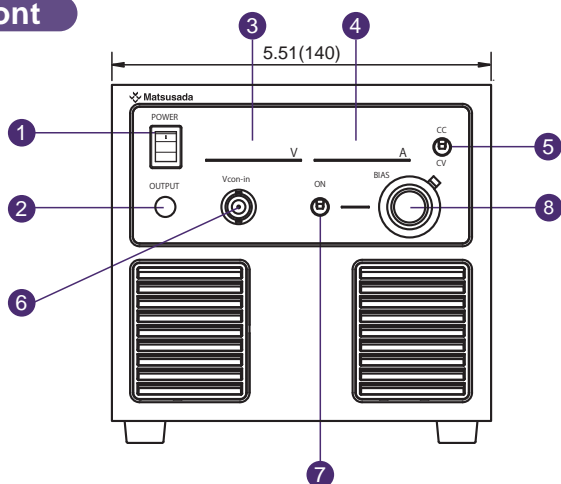

Rear

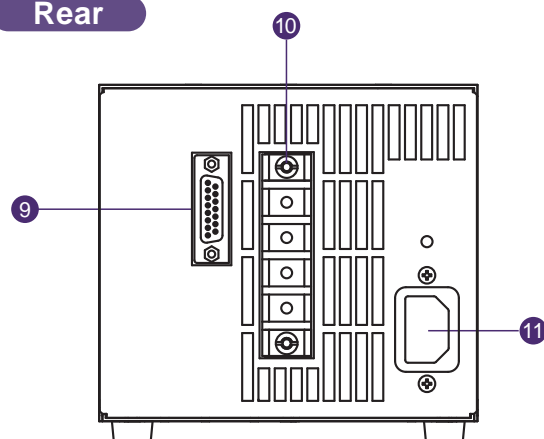

Side

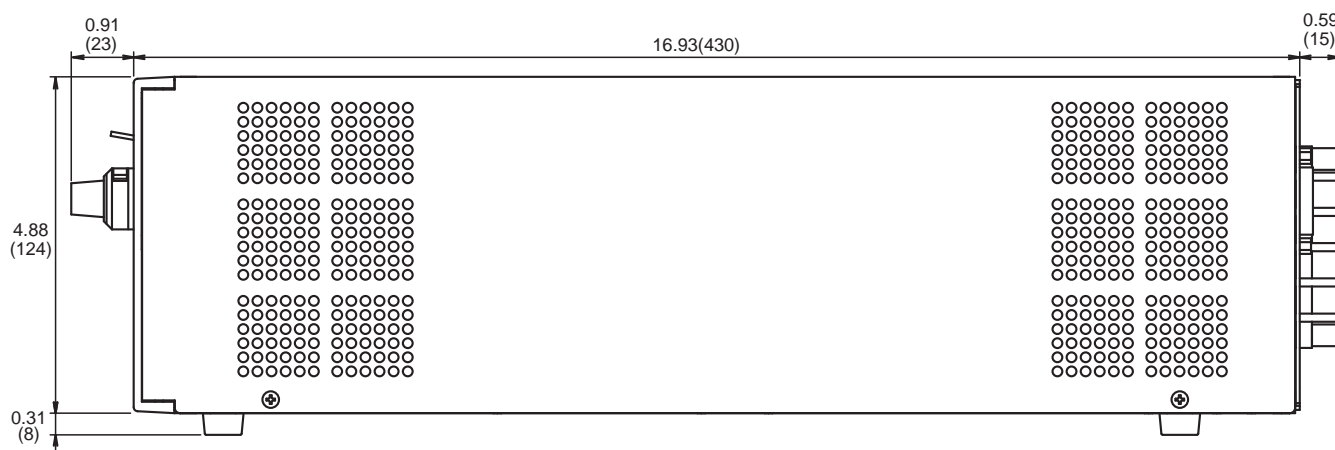

- | | |
|------------------------|----------------------|
| 1 POWER ON/OFF switch | 7 Bias ON/OFF switch |
| 2 OUTPUT ON/OFF switch | 8 Bias setting dial |
| 3 Output voltage meter | 9 Control connector |
| 4 Output current meter | 10 Output terminal |
| 5 CV/CC select switch | 11 AC input terminal |
| 6 Vcon-in terminal | |

CV/CC setting selection

Inputting voltage via Vcon-in enables the control of output voltage V when CV control is selected and output current A when CC control is selected.




Vcon	In CV mode Output voltage	In CC mode Output current
-10 V	-Rating	-Rating
0 V	0 V	0 A
+10 V	+Rating	+Rating

Use of BIAS

When the "BIAS ON/OFF switch" is flipped to ON, bias can be changed with the "BIAS setting dial." Bias of the voltage can be set when CV control is selected, and that of the current can be when CC control is selected.

Scale	In CV mode Output voltage	In CC mode Output current
000(ccw)	-Rating	-Rating
500	0 V	0 A
1000(cw)	+Rating	+Rating

AC input cable

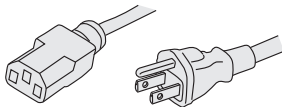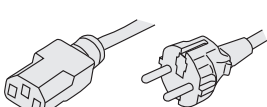CABLE TYPE 1	CABLE TYPE 3	CABLE TYPE 4
125 V / 10 A (Standard)	250 V/10 A (Sold separately)	250 V/10 A (Sold separately)
		

Option

-LN No protection against blackout

When ordering, suffix the following option mark to the model number.

Characteristic of amplifier

Rise time


(Stepping time): The response time is sometimes described by the rise time (as shown in the drawing on the right).

The rise time of an amplifier at a response speed of (= frequency bandwidth) F_c (Hz) is generally acquired by " $t_r \doteq 0.35/f_c$."

Fall time t_f is the same as t_r .

Frequency bandwidth

: at 30 kHz or lower, $t_r = t_f =$ around 12 μ s

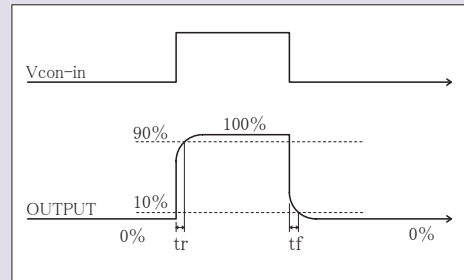


Response speed

When accurate output waveforms are required, select a amplifier with a frequency bandwidth higher enough than the operating frequency.

In case of using sine waves, 3 times to 5 times more frequency bandwidth is required, and around 10 times more in case of square waves in general.

Inadequate bandwidth causes not only decrease in the output amplitude but much difference between the input and output phases. Therefore operating the product while monitoring the actual output waveforms is recommended.

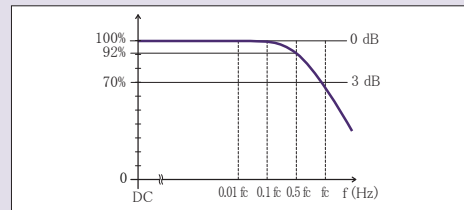

Capacitive load

Capacitive load may cause oscillation.

In such cases, placed a power resistance in series with the output.

Be careful that the frequency bandwidth is limited depending on the resistance and capacitance placed in series when capacitive load.

Inductive load

Some inductance of inductive load may cause resonance in CC mode.

In such cases, connect a C-R series circuit between output terminals to prevent resonance.



USA/Canada : ☎1-888-652-8651

other countries : ☎81-6-6150-5089

Customer Inquiry Sheet (DJOP series)

Please copy this page and above fax number after filling out form below.

☐ I would like

- ☐ A quotation ☐ An explanation of product ☐ A demonstration ☐ To purchase
- ☐ Other ()

■ Give us your requirement / comment

■ Please fill in below.

Address:	
Company:	
Dept.:	Title:
Name:	
Tel:	Fax:
E-mail:	

Manufacturer warranty

We warrant the specification, unless otherwise specified, at max. rated output after warm up, and scope of application is between 10% and 100% of max. rated output. We warrant that products contained in this catalog (hereinafter, the "Products") are free from defects in material and workmanship under normal use for a period of one (1) year from the date of shipment thereof. However, the warranty period for X-ray detectors and X-ray source shall be either one (1) year from the date of shipment or 1,000 hours, whichever shorter. The above warranty shall not apply to any Product which, at our sole judgment, has been: i) Repaired or altered by persons unauthorized by us; or ii) Connected, installed, adjusted or used otherwise than in accordance with the instructions furnished by us (including being used in an inappropriate installation environment, such as in corrosive gas, high temperature and humidity). We are not liable for any loss, damage or failure of the Products after the shipment thereof caused by external factors such as disasters. We will not inspect, adjust or repair any of our power supply products in the field or at any customer site. If you suspect that there has been a power supply failure in the field, please inspect your whole unit by yourself in an effort to determine that the problem is, in fact, arising out of our power supply products. If it is found that the problem is arising out of such power supply product after inspection, please contact your local sales office for additional troubleshooting. A "Return Merchandise Authorization" is required in case the power supply must be sent back to the factory in Japan for inspection and repair. We, at our sole discretion repair or replace such defective products at no cost to the purchaser. We assume no liability to the purchaser or any third party for special, incidental, consequential, or other damages resulting from a breach of the foregoing warranty. This warranty excludes any and all other warranties not set forth herein, express or implied, including without limitation the implied warranties of merchantability or fitness for a particular purpose. The Products are not designed and produced for such applications as requiring extremely high reliability and safety, or involving human lives (such as nuclear power, aerospace, social infrastructure facility, medical equipment, etc.). The use under such environment is not covered by this warranty and may require additional design and manufacturing processes. No modification or supplement of this warranty shall be binding unless in writing and signed by a duly authorized officer of Matsusada. Matsusada reserves the right to make any changes in the contents of catalogs or specifications at any time without advance notice. Due to compelling reason such as unavailability of components used, products might be un available or unable to repair. The products specified in catalogs or specifications are designed for use by the person who has enough expertise or under the control of such person, and not for general consumers. Schematics of products shall not be submitted to users. Test result or test data for the products shall be available upon request with charge.

Make sure you read the specification in the latest catalog before you order. Contact nearby sales office for the latest catalog.

PLEASE SEE THE LINK BELOW FOR THE COMPLETE WARRANTY TERMS

<https://www.matsusada.com/site/warranty.html>

Copyright © 2019 Matsusada Precision Inc. All rights reserved.



Matsusada Precision Inc.

Headquarters / Factory : 745 Aoji-cho Kusatsu Shiga 525-0041 Japan

Contact Us **www.matsusada.com**