

SMT05E Series

Non-Isolated DC-DC Converters

Data Sheet


Total Power: 8.25 Watts
Input Voltage: 3.0 - 5.5 Vdc
of Outputs: Single

SPECIAL FEATURES

- 5 A current rating
- Input voltage range:
3.0 - 5.5 Vdc
- Output voltage range:
0.75 - 3.63 V
- Ultra-high efficiency:
94% @ 5 Vin and 3.3 Vout
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Designed in reliability:
MTBF of >9 million hours per
Telcordia SR-322
- Ideal solution where board space is
at a premium or tighter card pitch
is required
- Industry standard surface-mount
footprint
- Available RoHS compliant
- Two year warranty

SAFETY

- UL, cUL CAN/CSA 22.2 No.
E174104
UL60950 File No. E174104
- TÜV Product Service (EN60950)
Certificate No. B 03 10 38572
- CB report and certificate to
DE3-51686M1



The SMT05E series are non-isolated dc-dc converters packaged in a surface-mount footprint giving designers a cost-effective solution for conversion from a 3.3 Vdc to 5 Vdc source. The SMT05E has a wide input range (3.0 Vdc to 5.5 Vdc) and offers a wide 0.75 Vdc to 3.63 Vdc output voltage range with a 5 A load, which allows for maximum design flexibility and a pathway for future upgrades. The SMT05E is designed for applications that include distributed power, workstations, optical network and wireless applications. Implemented using state of the art surface-mount technology and automated manufacturing techniques, the SMT05E offers compact size and efficiencies of up to 94%.

Electrical Specifications

Input		
Input voltage range		3.0 - 5.5 Vdc
Input current	No load (max.)	150 mA
Input current (max.)		3.0 A max. @ Io max. and Vout = 3.3 V
Input reflected ripple		40 mA rms
Remote ON/OFF		See Note 1
Start-up time		20 ms
Output		
Voltage adjustability		0.75 - 3.63 Vdc
Setpoint accuracy		±0.4%.
Line regulation		±1.0%
Load regulation		±1.0%
Minimum load		0 A
Overshoot/undershoot		None
Ripple and noise 5 Hz to 20 MHz		75 mV pk=pk 25 mV rms
Temperature co-efficient		±0.01%/ °C
Transient response		60 mV max. deviation 50 µs recovery within 1%

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

General Specifications

Efficiency		94%
Insulation voltage		Non-isolated
Switching frequency	Fixed	300 kHz typical
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	L x W x H	20.32 x 11.43 x 6.70 mm 0.800 x 0.450 x 0.264 inches
Weight		2.8 g (0.10 oz)
Coplanarity		100 μ m
MTBF	Telcordia SR-332	9,009,000 hours

Environmental Specifications

Thermal performance	Operating ambient temperature	-40 °C to +85 °C
See Note 2	Non-operating temperature	-40 °C to +125 °C
Protection		
Short-circuit	Continuous	
Thermal	Automatic recovery	

EMC Characteristics

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

Ordering Information

Model Number ⁽³⁾	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical)	Regulation	
							Line	Load
SMT05E-05W3V3J	18.15 W	3.0 - 5.5 Vdc	0.75 - 3.63 Vdc	0 A	5 A	94%	±1.0%	±1.0%

Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Type of Output	Output Voltage	Packaging Options
SMT	05	E	05	W	3V3	TJ
SMT = Surface Mount	05 = 5 Amp	E = Enhanced Performance	05 = 3.3 - 5.5 Vdc	S = Single W = Wide	0.75 - 3.63 Vdc	No '-T' suffix = Pb-free RoHS 6/6 compliant (Trays) -TJ suffix = Pb-free RoHS 6/6 compliant (Tape and Reel)

Output Voltage Adjustment

The ultra-wide output voltage trim range offers major advantages to users who select the SMT05E-05W3V3J. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.75 to 3.63 Vdc.

When the SMT05E-05W3V3J converter leaves the factory, the output has been adjusted to the default voltage of 0.75 V.

- When $V_{in} \geq 4.5$ V, then V_{out} can be adjusted from 0.75 - 3.63 Vdc
- When $V_{in} < 4.5$ V, then V_{out} can be adjusted from 0.75 - 2.75 Vdc

Notes:

- The SMT05E features a 'Negative Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground. The following conditions apply for the SMT05E:

Configuration

Remote pin open circuit
Remot pin pulled low
Remote pin pulled high [$V_{on/off} > 2.5$ V]

Converter Operation

Unit is ON
Unit is ON
Unit is OFF


A 'Positive Logic' Remote ON/OFF version is also possible with this converter. To order please use part number SMT05E-05W3V3-RJ or SMT05E-05W3V3-RTJ.

- Full derating curves available in both the Longform (Technical Reference) and Application Note.
- NOTICE: Some models do not support all options. Please contact your local Artesyn Embedded Power representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.

Mechanical Drawings

Pin Assignments

Pin	Function
1	Remote ON/OFF
2	Vout
3	Trim
4	Ground
5	+Vin

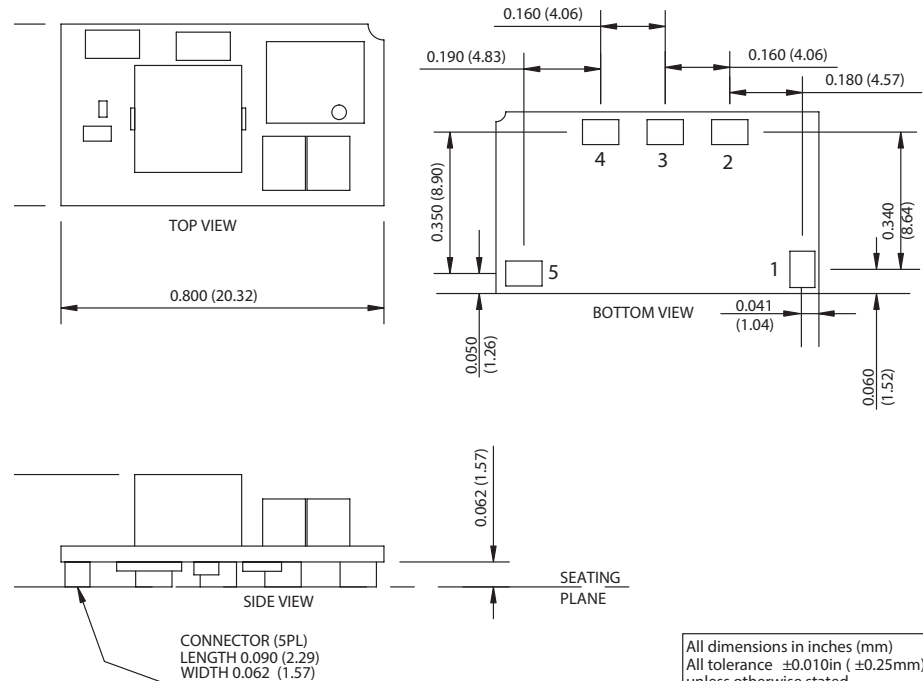

All dimensions in inches (mm)
 All tolerance ± 0.010 in (± 0.25 mm)
 unless otherwise stated

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
 Suite B100
 Tempe, AZ 85282, USA
 +1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
 4 Harbour Buildings, Waterfront West
 Brierley Hill, West Midlands
 DY5 1LN, UK
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYN
 An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
 For support: productsupport.ep@artesyn.com