

# **SM4430** DATA SHEET

# Bulkhead 4.1/9.5 Mini DIN Female to N Female Adapter IP67 Mated

# **Electrical Specifications**

Frequency Range Maximum VSWR

DC to 6 GHz 1.25:1

## **Specifications by Frequency**

| F1      | F2      | F3                          | F4                          | F5                          | Units                       |
|---------|---------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| DC to 3 | 3 to 4  |                             |                             |                             | GHz                         |
| 1.1:1   | 1.15:1  |                             |                             |                             |                             |
| 26.4    | 23.13   |                             |                             |                             | dB                          |
|         | DC to 3 | DC to 3 3 to 4 1.1:1 1.15:1 | DC to 3 3 to 4 1.1:1 1.15:1 | DC to 3 3 to 4 1.1:1 1.15:1 | DC to 3 3 to 4 1.1:1 1.15:1 |

## **Mechanical Specifications**

**Size** Length

1.756 in [44.6 mm]

4.1/9.5 Mini DIN

Beryllium Copper,

Brass, Tri-Metal

Female

Silver

PTFE

# **Connector 1**

Type

Inner Conductor Material and Plating

Body Material and Plating Dielectric Type

#### **Connector 2**

Type

Inner Conductor Material and Plating

Body Material and Plating

Dielectric Type

### **Environmental Specifications Temperature**

Operating Range

**Ingress Protection** 

### **Plotted and Other Data**

Notes:

Values at 25 °C, sea level

- Ingress Protection: IP67 Mated
- Connector 1: 4.1/9.5 Mini DIN Female
- Impedance 1: 50 Ohms

Features:

- Connector 2: N Female
- Impedance 2: 50 Ohms
- Adapter Design: Standard
- Body Style: Straight
- Mount Method: Bulkhead

N Female Beryllium Copper, Silver Brass, Tri-Metal PTFE -55 to +120 deg C


IP67 Mated

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



#### **Power Data**

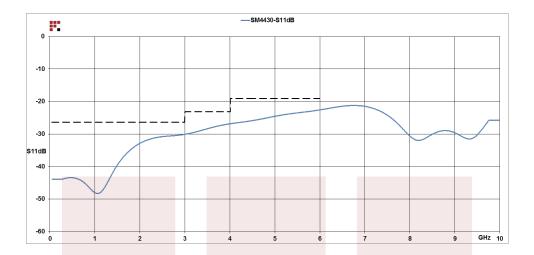


Bulkhead 4.1/9.5 Mini DIN Female to N Female Adapter IP67 Mated from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Bulkhead 4.1/9.5 Mini DIN Female to N Female Adapter IP67 Mated SM4430

URL: http://www.fairviewmicrowave.com/bulkhead-4.1-9.5-mini-din-female-n-female-adapter-sm4430-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



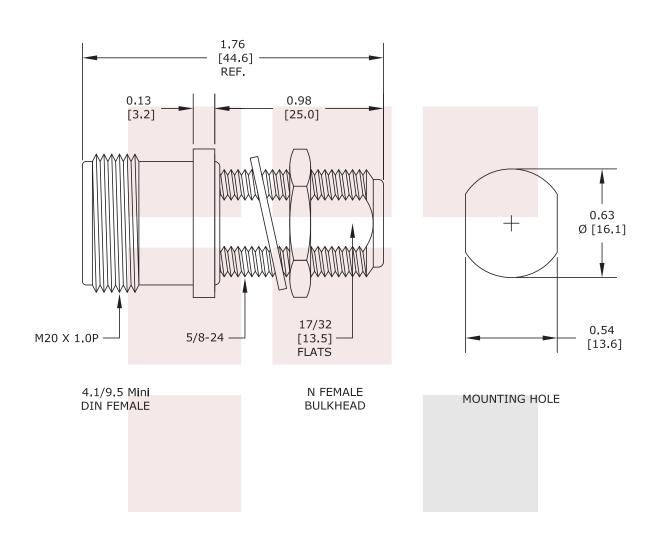

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm]. |        |       |       |                 |      |  |
|---|---|--------|-------|-------|-----------------|------|--|
| Bulkhead 4.1/9.5 Mini DIN Female to N Female Adapter IP67 Mated   | DWG NO  | SM4430 |       |       | CAGE CODE 3FKR5 |      |  |
|   | CAD FILE 061814   | SHEET  | SCALE | E N/A | SIZE A          | 2233 |  |