

2 GHz to 6 GHz, Broadband Amplifier with 3 Watt, 44 dB Gain and SMA

FMAM4043 is a broadband coaxial power amplifier, operating in the 2.0 to 6.0 GHz frequency range. The amplifier offers 35 dBm of P1dB min and 44 dB small signal gain typ, with the gain flatness of ± 1.0 dB typ. Input/output ports are matched for 50 ohms and are AC coupled. This power amplifier requires only a single positive DC supply, is unconditionally stable, operates over the temperature range of -30°C to 70°C , and is Hermetically sealed.

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc)

Description	Min	Typ	Max	Unit
Frequency Range	2		6	GHz
Gain	40	44		dB
Gain Flatness		± 1		dB
P1dB	+35			dBm
IP3		+45		dBm
Noise Figure		4.5		dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage 1	11	12	15	Volts
Operating DC Current		4,200		mA
Operating Temperature Range (OTR)	-30		+70	$^{\circ}\text{C}$

Mechanical Specifications

Size	
Length	3.87 in [98.3 mm]
Width	3.64 in [92.46 mm]
Height	0.67 in [17.02 mm]
Weight	0.689 lbs [312.53 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-30 to $+70$ deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

- Notes:
- Values at 25 $^{\circ}\text{C}$, sea level
 - ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
 - Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.



Features:



- 2.0 to 6.0 GHz Frequency Range
- P1dB: 35 dBm min
- Small Signal Gain: 44 dB typ
- Gain Flatness: ± 1.0 dB typ
- 50 Ohm Input and Output Matched
- -20 to $+85^{\circ}\text{C}$ Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in DC Voltage Regulator



Applications:


- Laboratory Applications
- R&D Labs
- Test Instrumentation
- Military & Space
- Communication Systems
- Satellite Communications
- Wireless Communications
- Unmanned Systems
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- RF Front Ends

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

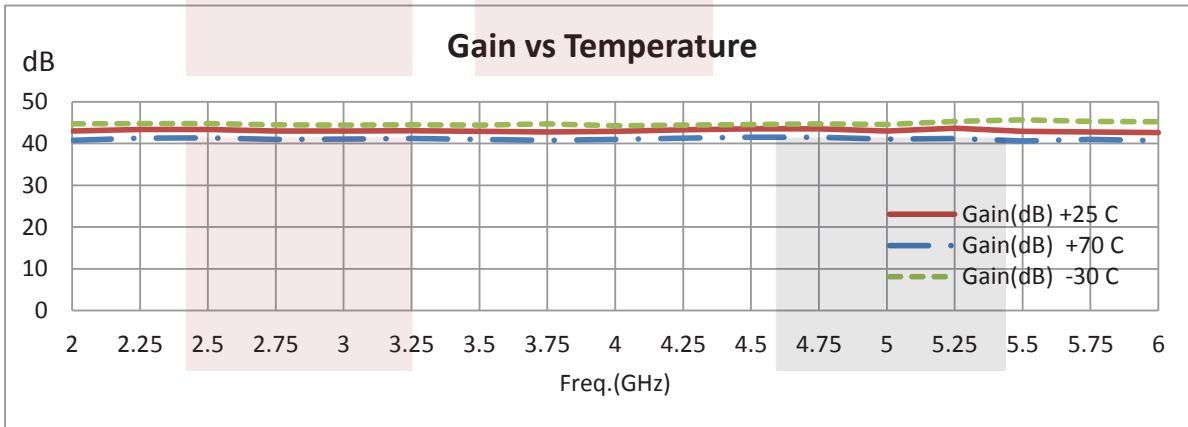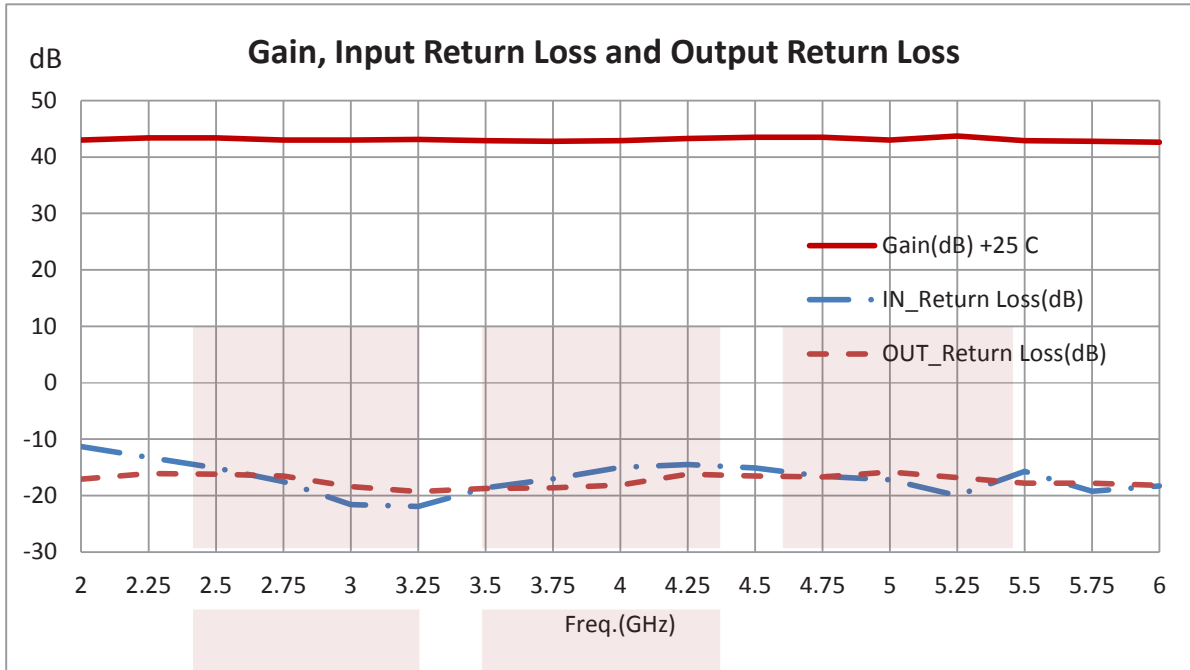

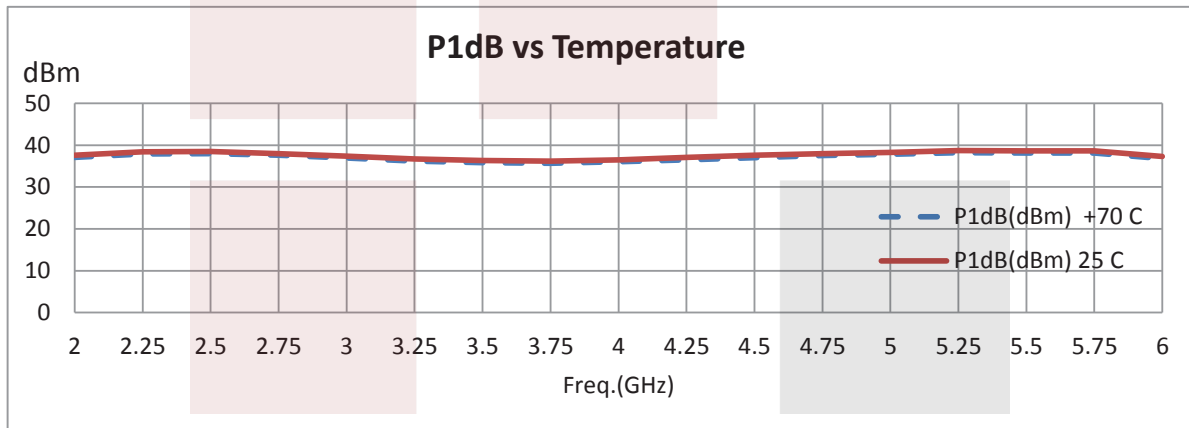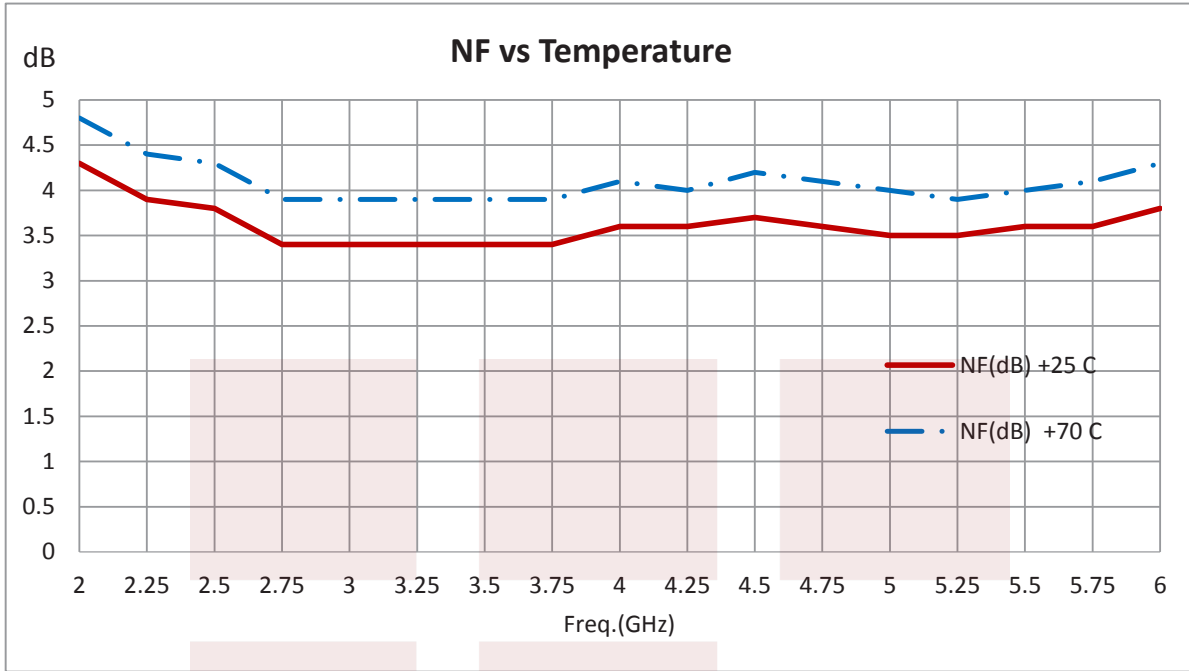

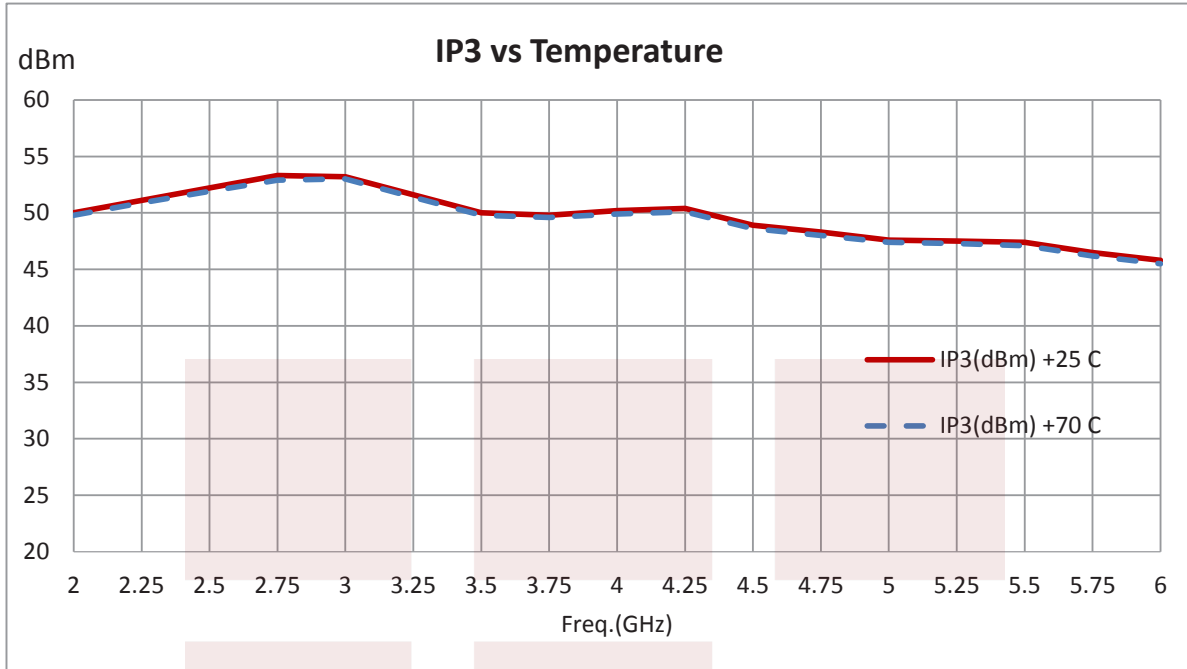


2 GHz to 6 GHz, Broadband Amplifier with 3 Watt, 44 dB Gain and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [2 GHz to 6 GHz, Broadband Amplifier with 3 Watt, 44 dB Gain and SMA FMAM4043](https://www.fairviewmicrowave.com/2-6-ghz-broadband-amplifier-fmam4043-p.aspx)

URL: <https://www.fairviewmicrowave.com/2-6-ghz-broadband-amplifier-fmam4043-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

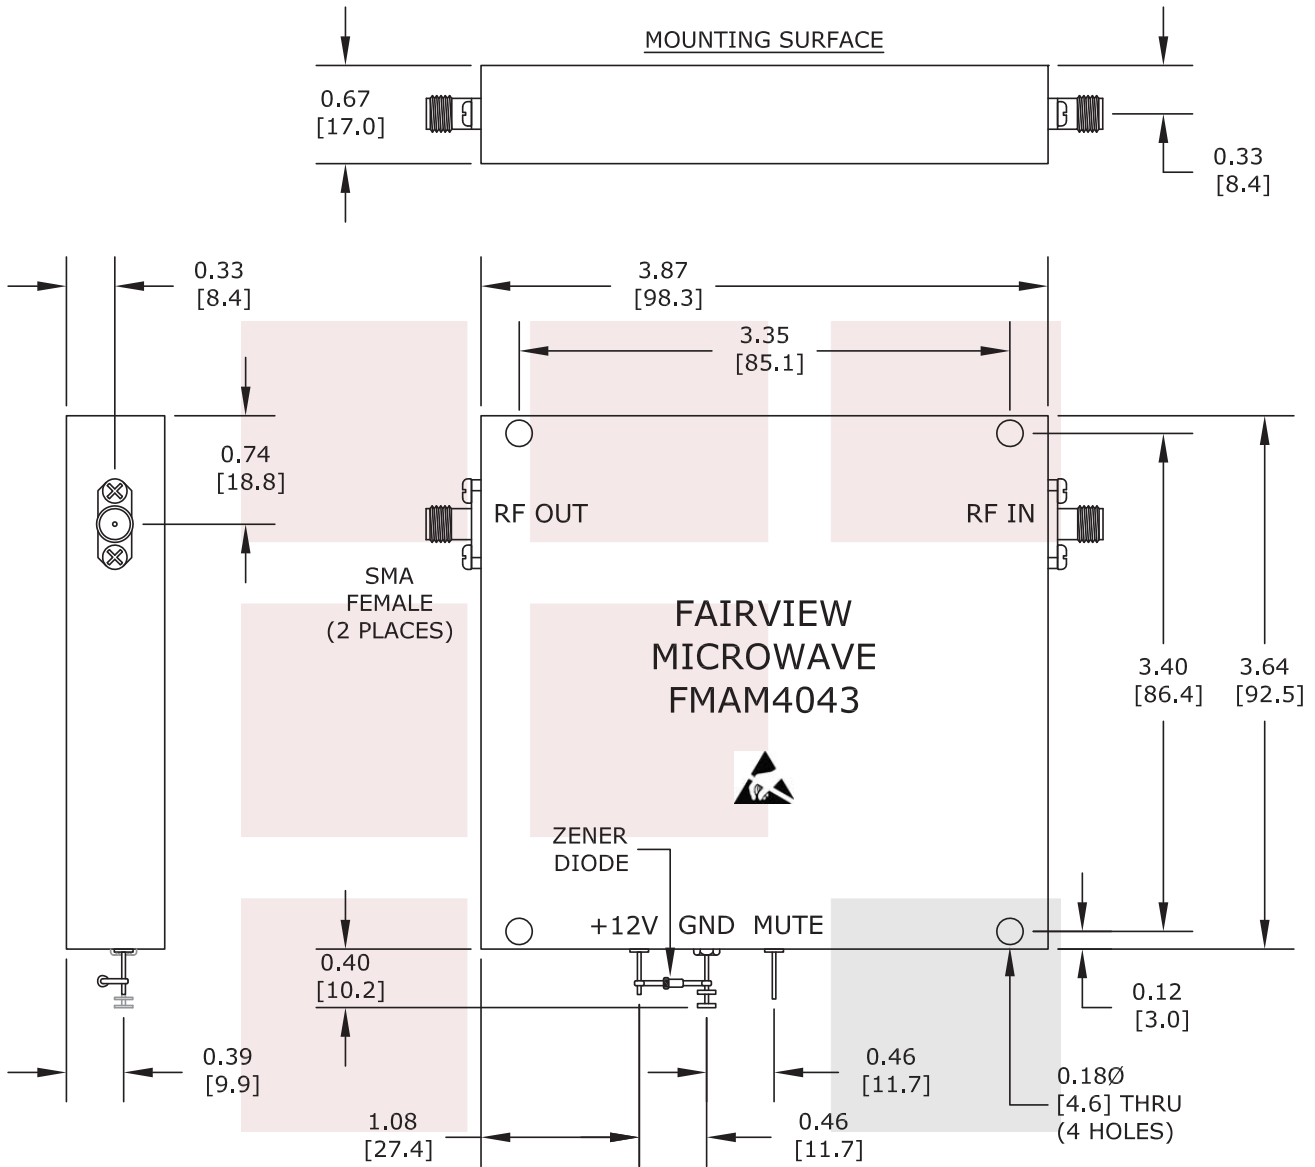

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 2 GHz to 6 GHz, Broadband Amplifier with 3 Watt, 44 dB Gain and SMA		DWG NO FMAM4043		CAGE CODE 3FKR5	
CAD FILE 031716		SHEET		SCALE N/A	
				SIZE A 2233	