

SMA/M TO SSMB/PLUG RG316 CABLES 6GHZ

SCA24316-XX


SPECIFICATIONS

CABLE ASSEMBLY:
FREQ: DC-6 GHZ

RAW CABLE: RG316
TYPICAL LOSS (EXCLUDING CONNECTORS)
@ 1GHZ: 0.29 DB/FT
@ 6GHZ: 0.69 DB/FT

OVERALL DIAMETER: .098"

CONNECTORS:
SMA: NICKEL PLATED BRASS
SSMC: Au PLATED BRASS
CONTACTS Au PLATING PER MIL-G-45204

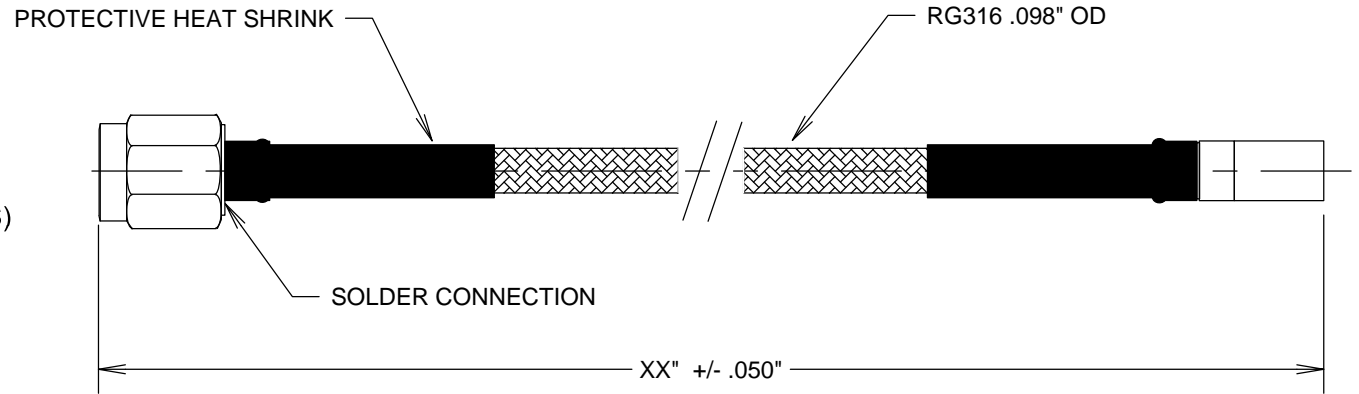

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMAM TO SSMB/PLUG RG316 CABLES
6GHZ**

SIZE

A

CAGE CODE

3FKR5

DWG NO

SCA24316-XX

REV

--

SCALE

SHEET