

# SMA M/M FLEXIBLE CABLES 3GHZ RG 174

## SCA45316-XX

### SPECIFICATIONS


CABLE ASSEMBLY:  
VSWR: <1.2 TYPICAL @ 3 GHZ

RAW CABLE: (RG174)  
LOSS (EXCLUDING CONNECTORS)  
@0.1GHz 0.08 DB/FT  
@0.5GHz 0.19 DB/FT  
@1GHz 0.27 DB/FT  
@2GHz 0.39 DB/FT  
@3GHz 0.49 DB/FT

OUTER SHIELD DIAMTER: 0.11"

CONNECTORS:  
SMA: NICKEL PLATED BRASS  
CONTACTS: Au PLATING PER MIL-G-45204  
INTERFACE: MIL-STD-348A

TROQUE WRENCH; 5 IN-IBS

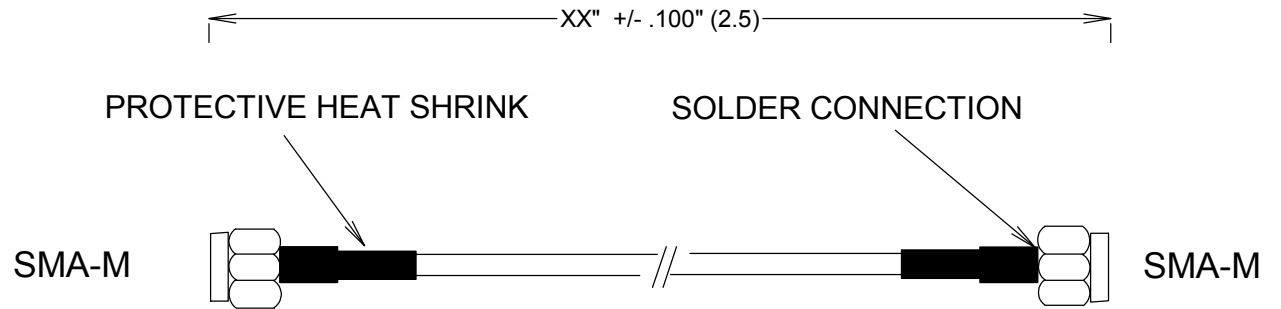

<b>FAIRVIEW MICROWAVE INC.</b>			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
SMA M/M FLEXIBLE CABLES 3GHZ RG 174			
SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	3FKR5	<b>SCA45316-XX</b>	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(mm) Typical