

MULTIWELD 250T-C

Ref. 014572
ref. 062238

The **MULTIWELD 250T-C** is a compact three-phase generator combining MIG/MAG, cored wire and MMA welding processes. Its intuitive interface integrates digital displays for easy and precise settings. With a reinforced structure including 2 handles for lifting and slinging, the **MULTIWELD 250T-C** is perfectly suited for welding in the workshop and on site use.

MULTIPROCESS

- **MIG/MAG welding :**
 - steel wire: Ø 0.6 to 1.2 mm
 - stainless steel wire: Ø 0.8 to 1.2 mm
 - aluminium wire: Ø 0.8 and 1.0 mm
 - cored wire (reverse polarity): Ø 0.9 to 1.2 mm
- **MMA welding:** basic and rutile electrodes (up to Ø 5 mm).

OPTIMISED MIG/MAG SETTINGS

- **Choice of the trigger mode:** 2T or 4T.
- **Welding aid:** table on the side of the generator to help the user adjust his tension and filler wire diameter according to the thickness of the material to be welded.

INTUITIVE

- Display readable even in bright light.
- **Simple interface** with large buttons and knobs for use with gloved hands.

INTEGRATED WIRE FEEDER

- Compatible wire reels: Ø 200 / 300 mm.
- Powerful 2 roller motorized wire-feeder for an efficient wire feeding.
- EURO torch connector for quick assembly/disassembly.

PRE-HEATING, PURE CO2


- Pre-installed socket (36 V - 4.2 A) for gas heater in pure CO2 welding (heater not included).
- Compatible with US (type A) and EURO electrical sockets (type C/E/F).

ROBUST

- Reinforced structure.
- 2 steel handles for easy manipulation.



Supplied without accessories (014572)

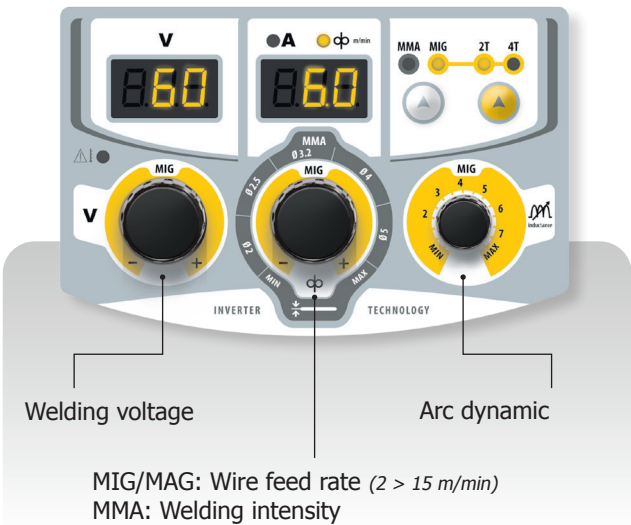

ACCESSORIES (option)

STEEL / STAINLESS STEEL		ALUMINIUM	
250 A (60%)	250 A (60%)	250 A (60%)	250 A (60%)
3 m	4 m	3 m	4 m
040700	040922	040724	040939



Earth clamp
400 A - 4 m - 35 mm²
043817



Electrode holder
200 A - 4 m - 25 mm²
043855



Rollers type A

STEEL / STAINLESS STEEL	Ø 0.6 / 0.8 Ø 0.8 / 1.0	x1	042339
			041189
Cored wire	Ø 0.8 / 0.9 Ø 0.9 / 1.2		041196
			046856
			042346



Trolley JOB SITE XL
039568

50/60 Hz	A	I ₂ MMA	I ₂ MIG	Ø mm	Ø mm	Ø mm	Electronic Control	m/min	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN 60974-1 (40°C)	U ₀	cm	kg	IP	Protected & compatible power generator (+/-15%)
50/60 Hz	A	A	A	GAS NO GAS	200 300	Ø mm	Electronic Control	m/min	Ø mm	X (40°C)	V	cm	kg	IP 21	10 kVA
400V 3~	16	40 → 220	40 → 250	0.6 - 1.2	0.9 - 1.2	✓ ✓	1.6 → 5	2.0 - 15.0	0.8 1.0	170A @ 60% 130A @ 100%	59	58 x 52 x 32	32	IP 21	10 kVA