

Series 475

Convectron® Vacuum Gauge Controller



The Series 475 Convectron® Vacuum Gauge Controller combines with the industry-standard Series 275 Convectron gauge to provide high performance vacuum pressure measurement using a unique variation of thermal conductivity. The Convectron gauge is a convection-enhanced Pirani design that features individually calibrated gauges, temperature compensation and convection technology for increased accuracy and repeatable vacuum measurements over seven decades from 1×10^{-4} Torr (1×10^{-4} mbar; 1×10^{-2} Pa) to atmosphere.

The Series 475 Convectron Controller is a third-generation RoHS compliant Convectron gauge controller that combines rugged reliability with key features for ease of use and system integration. It includes several features such as self-diagnostics, integrated Convectron gauge simulation, and built-in gas curves to adjust for various vacuum environments. The Series 475 is easy to use with a highly visible Vacuum Fluorescent Display (VFD) and intuitive front panel controls that allow gauge calibration and adjustment of vacuum measurement parameters without the need for special tools. The Series 475 Convectron Controller can be used as a simple readout device for basic vacuum system control or integrated into a more sophisticated control system. The Series 475 Controller provides a range of control I/O options including an analog output, set point relays and a serial communication interface. The compact packaging and innovative electronics make the Series 475 Convectron Controller and Convectron technology the ideal solution for today's vacuum measurement systems.

Product Features

- Wide range vacuum pressure measurement from atmosphere to 1×10^{-4} Torr (1×10^{-4} mbar, 1×10^{-2} Pa)
- Highly Visible Vacuum Fluorescent Display (VFD)
- Highly configurable I/O options including an analog output, set point relays, serial communication interface
- Pre-programmed gas curves for N₂, Ar, He, CO₂, and O₂
- Intuitive menu control for simplified configuration and parameter setup



Key Benefits

- High-performance compact vacuum controller for bench top and panel mount applications
- Built-in convectron gauge simulator
- Self-diagnostics

Convectron technology has become the industry-standard with over 35 years of unmatched performance, repeatability and reliability. To assure the highest level of accuracy and gauge-to-gauge reproducibility, each Convectron Gauge is burned-in for stability and individually calibrated for unmatched accuracy. As the industry standard, Convectron Gauges are in use today on hundreds of thousands of vacuum processes throughout the world, making Convectron technology the best choice for your vacuum measurement applications.



Convectron Gauge



Convectron Gauge Cable

- **Wide Measurement Range:** Vacuum system pressure can be monitored continuously from 1×10^{-4} Torr (1×10^{-4} mbar, 1×10^{-2} Pa) to atmosphere.
- **High Measurement Resolution:** Designed to take full advantage of Convectron Gauge technology with 1 Torr (1 mbar, 0.1 Pa) resolution at atmosphere and 0.1 mTorr (1×10^{-4} mbar, 1×10^{-2} Pa) resolution at low pressure.
- **Vacuum Fluorescent Display:** The VFD is easier to read from greater distances than other types of displays. The display is configurable to use scientific notation or two ranges (Torr and mTorr, mbar and 10^{-3} mbar, or kPa and Pa) to provide a continuous measurement readout from atmosphere to low pressure.
- **Process Set Point Option:** Relay contacts allow control of other vacuum equipment, such as valves, pumps, heaters, alarms, and safety interlocking.
- **Multiple Gas Curves:** Selectable N_2 , Ar, He, CO_2 and O_2 gas curves are pre-programmed, eliminating the need for individual calibration when changing the process gas.
- **Push-Button Controls:** Calibration and set point settings are easy to adjust using intuitive front panel controls. No special tools are required.
- **Easy-to-use Analog Signals:** Provides a one volt per decade logarithmic signal (0-7V or 1-8V) or a selectable non-linear signal (0-9V) that is backwards compatible with older Convectron gauge controllers.
- **Serial Communication Interface Option:** RS-232 interface allows easy integration with computer controlled systems.
- **Built-in Convectron Gauge Simulator:** Simulates a Convectron gauge, which allows system diagnostics without the need of a vacuum system.
- **Self Diagnostics:** The A/D (Convectron gauge bridge voltage) and analog outputs are continuously monitored for erroneous readings.
- **Compact 1/8 DIN Controller:** Easy to install in space restricted locations.
- **Rugged All-Metal Package:** Provides a high level of immunity to RF noise


Specifications

Measurement Range for Air and N₂ <small>See Notes (1), (2)</small>	
Torr	1x10 ⁻⁴ to atmosphere
mbar	1x10 ⁻⁴ to atmosphere
Pa	1x10 ⁻² to atmosphere
Step Size at Minimum Pressure	1x10 ⁻⁴ Torr, 1x10 ⁻⁴ mbar, 1x10 ⁻² Pa
Display	Vacuum Fluorescent
Update Rate	Every 0.5 sec
Input Power	12 to 24 VDC, 6 W continuous
Weight	720 gm (25 oz)
Operating Temperature	0°C to 40°C ambient
Non-Operating Temperature	-40°C to 70°C
Set Point Relays (optional)	(2) single pole, double-throw (SPDT)
Contact Rating	5 A @ 250 VAC resistive load
Range	1x10 ⁻³ to 1000 Torr, 1x10 ⁻³ to 1333 mbar, 1x10 ⁻¹ Pa to 133 kPa
Resolution	2 significant digits
Communication Interface (optional)	RS-232 or RS-485
Data Format	ASCII, 8 data bits, one stop-bit, no parity, no handshake
Baud Rate	1200, 2400, 4800, 9600, 19200, 38400 (19200 Default) (software selectable)
Address (RS-485 only)	0 to 63 (software selectable)
Convection Gauge	
Sensor Material	Gold-plated tungsten, platinum
Other Materials Exposed to Gas	304 stainless steel, borosilicate glass, Kovar®, alumina, NiFe alloy, polyimide
Internal Volume	35 cm ³ (2.14 in. ³)
Weight	85 grams (3 ounces)
Gauge Operating Temperature	0°C to 50°C ambient
Gauge Bakeout Temperature	150°C maximum, non-operating, cable disconnected
Mounting Orientation	Horizontal preferred
Cable Bakeout Temperature	105°C maximum
Compliance	CE

Notes:

¹ Measurements will change with different gases and mixtures. Correction parameters for common gases are provided in the instruction manual.

² Convection Gauges are not intended for use with flammable or explosive gases.

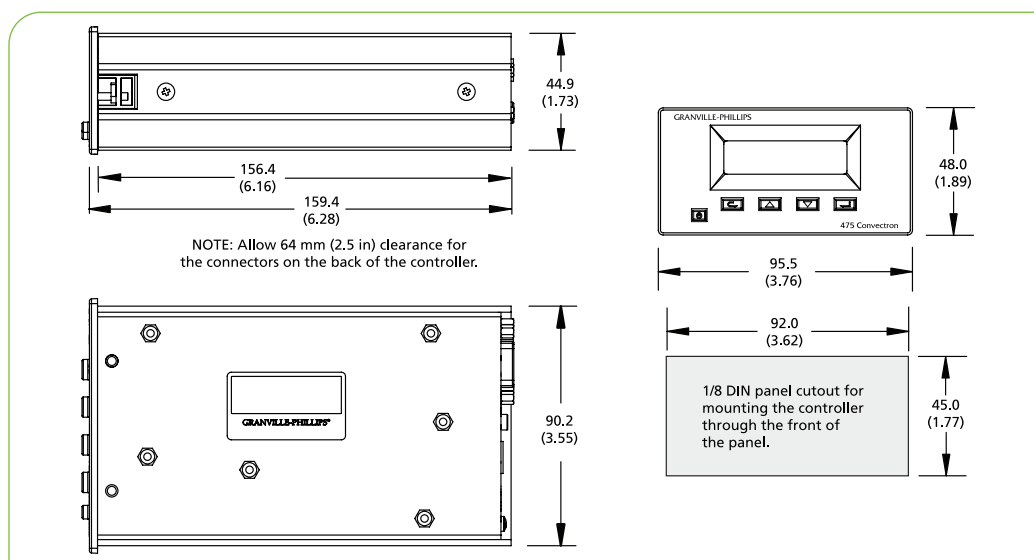

Dimensional Drawing

Note: Unless otherwise specified, dimensions are nominal values in millimeters (inches referenced).

Ordering Information

Ordering Code Example: 475001-0-0-T	Code	Configuration
Convectron® Vacuum Gauge Controller		
1/8 DIN, panel mount with digital display	475001	475001
Interface Options (Slot X)		
None	0	0
RS-232	A	
RS-485	B	
Set Point Option (Slot Y)		
None	0	0
2 set points	2	
Measurement Units*		
Torr	T	T
mbar	M	
Pascal	P	


* User configurable

Ordering Code Example: 475008-1	Code	Configuration
Power Supply		
Universal Power Supply	475008	475008
Power Cord Plug Type		
North America 115 VAC & Japan 100 VAC	1	1
North America 240 VAC	2	
Universal Europe 220 VAC	3	
United Kingdom 240 VAC	4	
Convectron Gauge Cables		
10 feet (3 meters)	475012-10	
25 feet (7.6 meters)	475012-25	
50 feet (15.2 meters)	475012-50	
100 feet (30.5 meters)	475012-100	
200 feet (61 meters)	475012-200	
500 feet (152.4 meters)	475012-500	
Convectron Gauges (gold-plated Tungsten)*		
1/8 NPT / 1/2 inch tubulation	275071	
1/4 inch VCR® type female fittings	275185	
1/2 inch VCR® type female fittings	275282	
3/8 inch VCO® type male fitting	275233	
1.33 inch (NW16CF) rotatable Conflat® type flange	275256	
2.75 inch (NW35CF) rotatable Conflat® type flange	275238	
NW16KF flange (welded)	275203	
NW25KF flange (welded)	275196	
NW40KF flange (welded)	275316	

* Platinum sensor gauges are available.

Analog Output Signals

Standard analog output is 0 to 7 Volts that is linear in voltage with the log of pressure. Two alternate analog outputs can be selected using the front panel buttons: either 1 to 8 Volts that is linear in voltage with the log of pressure or 0 to 9 Volts that is non-linear with the log of pressure and mimics the output of older vacuum gauge controllers.

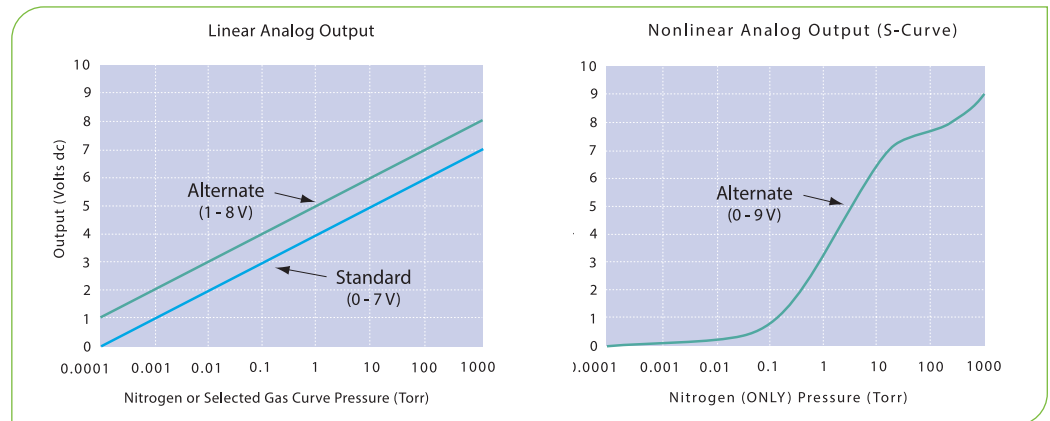

www.MKSINST.com

+1-978-645-5500 | +1-800-227-8766

475_01/20

©2020 MKS Instruments, Inc.

Specifications are subject to change without notice.

MKS products provided subject to the US Export Regulations. Export, re-export, diversion or transfer contrary to US law (and local country law) is prohibited.

Granville-Phillips®, Convectron® and Micro-Ion® are registered trademarks, and mksinst™ is a trademark of MKS Instruments, Inc. Kovar® is a registered trademark of Carpenter Technology Corporation. ConFlat® is a registered trademark of Agilent Technologies. VCR® and VCO® are registered trademarks of Swagelok Marketing Co.