




Linear Scale AT715
Item number: 539-819R





Safety
Dust- and
Water-
Protected




www.tuv.com
ID 000007295

ABSOLUTE®




Images

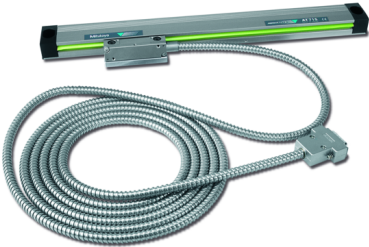

└1: **1240 mm**
└2: **1378 mm**
└3: **1362 mm**
└4: **1398 mm**
└5: **459 mm**
└6: **451 mm**
└7: **460 mm**

└1: **1240 mm**
└2: **1378 mm**
└3: **1362 mm**
└4: **1398 mm**
└5: **459 mm**
└6: **451 mm**
└7: **460 mm**

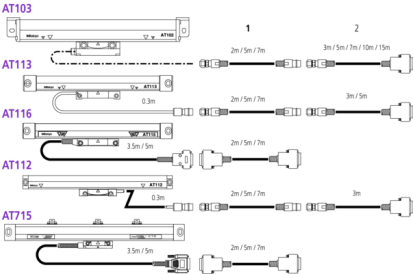

Description

This linear scale is based on electro magnetic induction principle thus offering you high enviroment protection IP level, in the mean time reference point is not necessary after each power on.

Only compatible with KA series display units.

Specification

Measuring method:	Electromagnetic induction system
Accuracy:	100 to 500 mm ±5 µm 600 to 1800 mm ±7 µm 2000 to 3000 mm ±10 µm
Max. drive speed:	50 m/min
Signal period:	20 µm
Resolution:	0,001 / 0,005 (switchable via Counter)
Cable length:	4.9 m
Effective range:	1,200 mm

Dimensions

	1: 1240 mm 2: 1378 mm 3: 1362 mm 4: 1398 mm 5: 459 mm 6: 451 mm 7: 460 mm
--	---

Accessories

Optional accessories:

	Extension Cable 2m for AT715 09AAB674A List Price 216.00 ex. VAT
	Extension Cable 5m for AT715 09AAB674B List Price 304.00 ex. VAT
	Extension Cable 7m for AT715 09AAB674C List Price 358.00 ex. VAT
	Linear Scale Counter KA-213 174-185D List Price 550.00 ex. VAT
	Linear Scale Counter KA-212 174-183D List Price 450.00 ex. VAT