





Linear Scale AT715

Item number: 539-803R





Safety
Dust- and
Water-
Protected




www.tuv.com
ID 000007295

ABSOLUTE®



Images

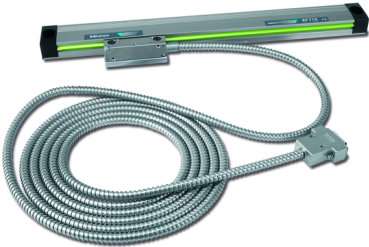

L1: 220 mm

L2: 358 mm

L3: 342 mm

L4: 378 mm




L1: 220 mm

L2: 358 mm

L3: 342 mm

L4: 378 mm

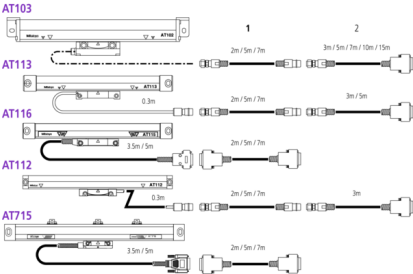

L1: 220 mm

L2: 358 mm

L3: 342 mm

L4: 378 mm

Description

This linear scale is based on electro magnetic induction principle thus offering you high enviroment protection IP level, in the mean time reference point is not necessary after each power on.

Specification

Measuring method:	Electromagnetic induction system
Accuracy:	100 to 500 mm ±5 µm 600 to 1800 mm ±7 µm 2000 to 3000 mm ±10 µm
Max. drive speed:	50 m/min
Signal period:	20 µm
Resolution:	0,001 / 0,005 (switchable via Counter)
Cable length:	3.4 m
Effective range:	200 mm

[illegible]

- L^1 : 220 mm
 L^2 : 358 mm
 L^3 : 342 mm
 L^4 : 378 mm

Optional accessories:



List Price
216.00 ex. VAT



List Price
304.00 ex. VAT



List Price
358.00 ex. VAT



List Price
550.00 ex. VAT



List Price
450.00 ex. VAT