

SK-2 Semi-Automatic Series

SK-2 Series- Low torque AC-type


- 1.AC Plug; no adapter needed.
- 2.Inner dual insulator which is conforming to the international safety standard. 100% safe, light and handy, easy to use and appearance fits in with ergonomics logic.
- 3.Precise torque. It is adjustable from small to large but speed stays constant. The rotation speed is fast and also light and handy. Boost productively.
- 4.Best choice for general electronic appliances, such as lamps, small home appliances, toys and etc.

SK-2 Series- Medium and High AC-type

- 1.Torque range is from 5-45kgf.cm., Torque accuracy \pm 5%
- 2.Easy to operate and able to improve production efficiency
- 3.Suitable when assembling for the out shell screws of general home electric appliances.
- 4.The best choice when composing the tapping screws under 5mm diameter.

SK-2 Semi-Automatic Series



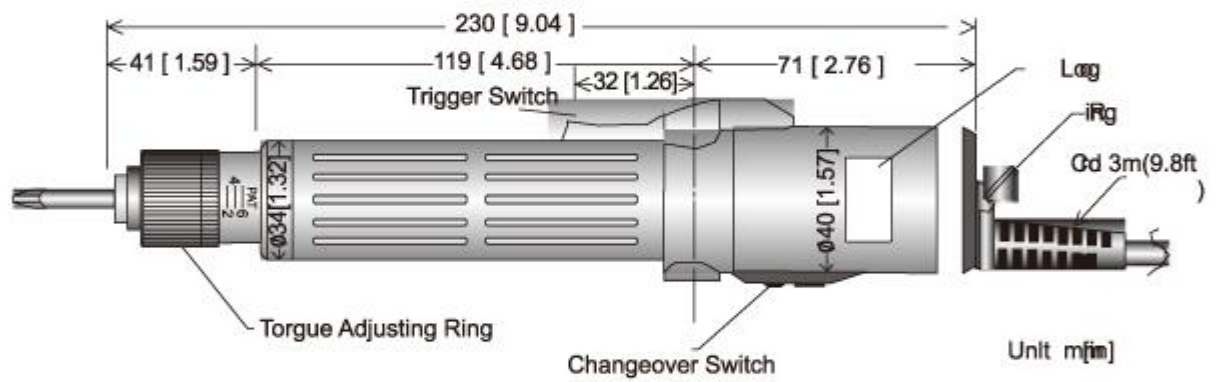

Product Spec

Specifications

Model		SK-205LS	SK-215LS	SK-2205LS	SK-2215LS
Input Voltage		AC110~120V 50/60Hz		AC220~240V 50/60Hz	
Torque	(Kgf.cm)	0.5~7	2~15	0.5~7	2~15
	(Lbf.in)	0.44~6.10	1.77~13	0.44~6.10	1.77~13
	(N.m)	0.05~0.69	0.2~1.47	0.05~0.69	0.2~1.47
Repeatable Torque Accuracy(%)		±3%			
Torque Adjustment		Stepless			
Free Speed (r.p.m)		1100	1100	1000	1000
Power Consumption		0.3A	0.3A	0.2A	0.2A
Screw Size Dia (mm)	Machine Screw	1.6~3.0	2.0~4.0	2.6~4.0	2.0~4.0
	Tapping Screw	1.4~2.0	2.0~3.0	2.6~3.5	2.0~3.0
Weight(g)		480			
Length(mm)		230			
ESD(Anti-Static)		—			
UL(Anti-Static)		—			
CE		—			
RoHS		V			
Bit Type					

Specifications

Model		SK-2125LS	SK-2135LS	SK-2145LS	SK-2125LSF	SK-2225LS	SK-2235LS	SK-2245LS	SK-2225LSF
Input Voltage		AC110~120V 50/60Hz				AC220~240V 50/60Hz			
Torque	(Kgf.cm)	5~25	10~35	15~45	5~18	5~25	10~35	15~45	5~18
	(Lbf.in)	4.34~21.68	8.67~30.35	13~39.02	4.34~15.58	4.34~21.68	8.67~30.35	13~39.02	4.34~15.58
	(N.m)	0.49~2.45	0.98~3.34	1.47~4.41	0.49~1.76	0.49~2.45	0.98~3.34	1.47~4.41	0.49~1.76
Repeatable Torque Accuracy(%)		±5%							
Torque Adjustment		Stepless							
Free Speed (r.p.m)		1000	830	550	2000	1000	700	500	1000
Power Consumption		0.3A	0.3A	0.3A	0.3A	0.2A	0.2A	0.2A	0.2A
Screw Size Dia (mm)	Machine Screw	2.6~5.0	2.6~5.0	3.0~6.0	2.0~4.0	2.6~5.0	2.6~5.0	3.0~6.0	2.0~4.0
	Tapping Screw	2.6~3.5	2.6~4.0	3.0~5.0	2.0~3.5	2.6~3.5	2.6~4.0	3.0~5.0	2.0~3.5
Weight(g)		600							
Length(mm)		264							
ESD(Anti-Static)		—							
UL(Anti-Static)		—							
CE		—							
RoHS		V							
Bit Type									