


SK-3 Series


- 1.Extra strong magnet.
- 2.Fatigue-resistant for long time using, torque accuracy $\pm 3\%$
- 3.Compact, light-weight, and easy to operate, improve production efficiency.
- 4.Best fit for laptop and peripherals operation.
- 5.Torque fixable with a fixing ring(KC-6C)
- 6.Conform to EMI, EMC International Safety Standards.

SK-3 Series




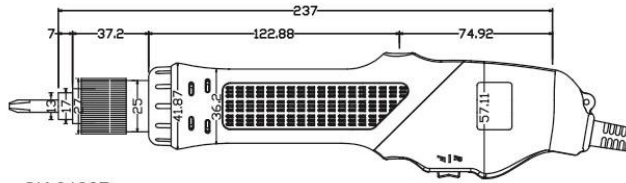

SK-3120P

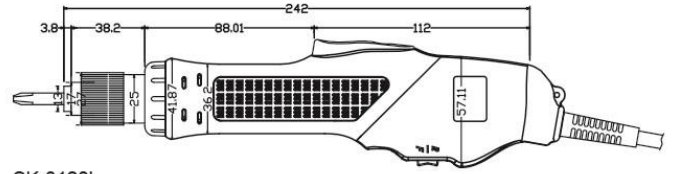

SK-3120L

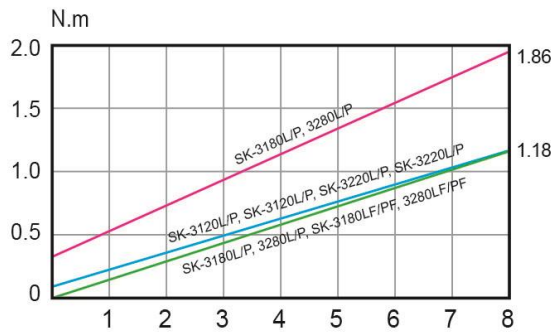

Product Spec

Model	SK-3120L SK-3120P	SK-3180L SK-3180P	SK-3180LF SK-3180PF	SK-3220L SK-3220P	SK-3280L SK-3280P	SK-3280LF SK-3280PF
Input Voltage	AC110~120V 50/60Hz			AC220~240V 50/60Hz		
Torque (Kgf.cm)	L : 1.5~12		L/P:3~19	L : 1.5~12	L : 1.5~12	L/P:3~19 L : 1.5~12

		P : 2~12		P : 2~12	P : 2~12		P : 2~12
	(Lbf.in)	L : 1.33~10.44	L/P:2.57~16.4 6	L : 1.33~10.44	L : 1.33~10.44	L/P:2.57~1 6.46	L : 1.33~10.44
		P : 1.77~10.44		P : 1.77~10.44	P : 1.77~10.44		P : 1.77~10.44
	(N.m)	L : 0.15~1.18	L/P:0.29~1.86	L : 0.15~1.18	L : 0.15~1.18	L/P:0.29~1. 86	L : 0.15~1.18
		P : 0.2~11.8		P : 0.2~11.8	P : 0.2~11.8		P : 0.2~11.8
Repeatable Torque Accuracy(%)		±3%					
Torque Adjustment		Stepless					
Free Speed (r.p.m)		1000	1000	2000	1000	1000	2000
Power Consumption		0.3A	0.3A	0.3A	0.2A	0.2A	0.2A
Screw Size Dia (mm)	Machine Screw	1.6~3.0	2.6~3.5	2.0~3.0	1.6~3.0	2.6~3.5	2.0~3.0
	Tapping Screw	1.6~2.6	2.6~3.0	2.0~2.6	1.6~2.6	2.6~3.0	2.0~2.6
Weight(g)		550			550		
Length(mm)		L/242 P237					
ESD(Anti-Static)		—					
UL(Anti-Static)		—					
CE		—					
RoHS		V					
Bit Type							