

TC-5925AP Pneumatic Shield Box



Features

- High RF Shielding
- Pneumatic control of lid open-close and optional test fixture motions
- EMI filters on all Data and DC lines
- Easily customizable to meet various test needs
- RS-232C Remote Control
- 2 independent shield rooms (Each door operates independently)

Specifications

Mechanical Specifications

Line voltage	100-240 VAC, 50/60 Hz, 15watt max.
Remote control	RS-232C, 3 wire, DB9(s)
Air connection	
Main connector	6 mm OD hose, one-touch push-on fitting
Input air pressure	5 to 10 bar
Dimension	
Inside	176(W) x 236(D) x 82(H) mm
Outside	405(W) x 356(D) x 194(H) mm, door closed. 530(D) mm, door open.
Weight	approx. 17 kg
*Packing	
Size	510(W) x 560(D) x 360(H) mm
Weight	approx. 26 kg

* The size or weight of a package may vary on how to pack a package.

Typical RF Shielding






The shield effectiveness below is measured when the blank panel is mounted; other I/O interface panel results a different shielding effectiveness of the shield box.

Frequency	Shielding effectiveness (dB)
100 to 2000 MHz	> 70 dB
2000 to 3000 MHz	> 70 dB
3000 to 6000 MHz	> 60 dB

Ordering Information

Order Number	Description
	Pneumatic Shield Box (including accessories below)
	Test Report
	RF Cable, SS-402, N(m) to N(m) 1 m, 1 pc
TC-5925AP	Data Cable, DB9(p) to DB9(s) cable 2 m, 1 pc
	Power Cable, 220 V, 1 pc
	Box Remote Switch Cable, 3 m, 1 pc
	Air Hand valve, 1 pc

Pre-Configured I/O Interface Panel

I/O Interface Panel	Order Number	Configuration
	M591012B	<ul style="list-style-type: none"> Two(2) N(f) outside and SMA(f) inside
	M591012A*	<ul style="list-style-type: none"> one(1) DB25(p) outside and DB25(s) inside, 1000 pF Pi filter one(1) USB2.0 outside and inside
Data Interface Panel		
	M591016B	<ul style="list-style-type: none"> two(2) N (f) ouside and SMA (f) inside
	M591016E*	<ul style="list-style-type: none"> one(1) DB25(p) outside and DB25(s) inside, 1000 pF Pi filter one(1) DB9(p) outside and DB9(s) inside, 100 pF Pi filter one(1) USB2.0 outside and inside
Data Interface Panel		
	M591017B	<ul style="list-style-type: none"> three(3) SMA (f) ouside and SMA (f) inside one(1) DB25(p) outside and DB25(s) inside, 1000 pF Pi filter one(1) DB9(p) outside and DB9(s) inside, 100 pF Pi filter one(1) USB 2.0 outside and inside one(1) DC Power Jack Adaptor
Data Interface Panel		
	M591023A	<ul style="list-style-type: none"> four(4) N (f) ouside and SMA (f) inside two(2) USB2.0 outside and inside
Data Interface Panel		
	M591047A	<ul style="list-style-type: none"> three(3) SMA (f) ouside and SMA (f) inside one(1) DB25(p) outside and DB25(s) inside, 1000 pF Pi filter two(2) USB 3.0 outside and inside one(1) DC Power Jack Adaptor
Data Interface Panel		



In this (*) case, DB25 100 pF filter is fitted instead of 1000 pF

Custom I/O Interface Panel

- Customized I/O Interface Panel is available by selecting below I/O interfaces and combine.

Please contact Tescom sales team or your local distributor.

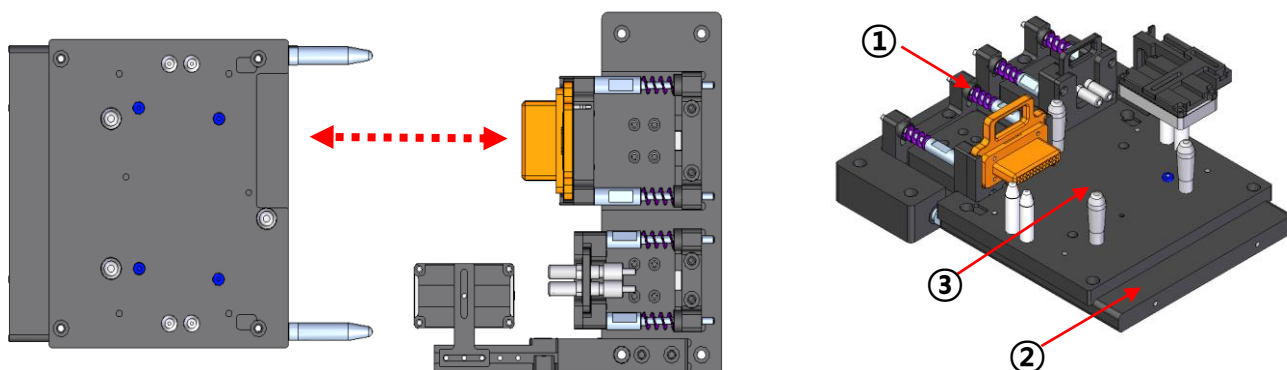
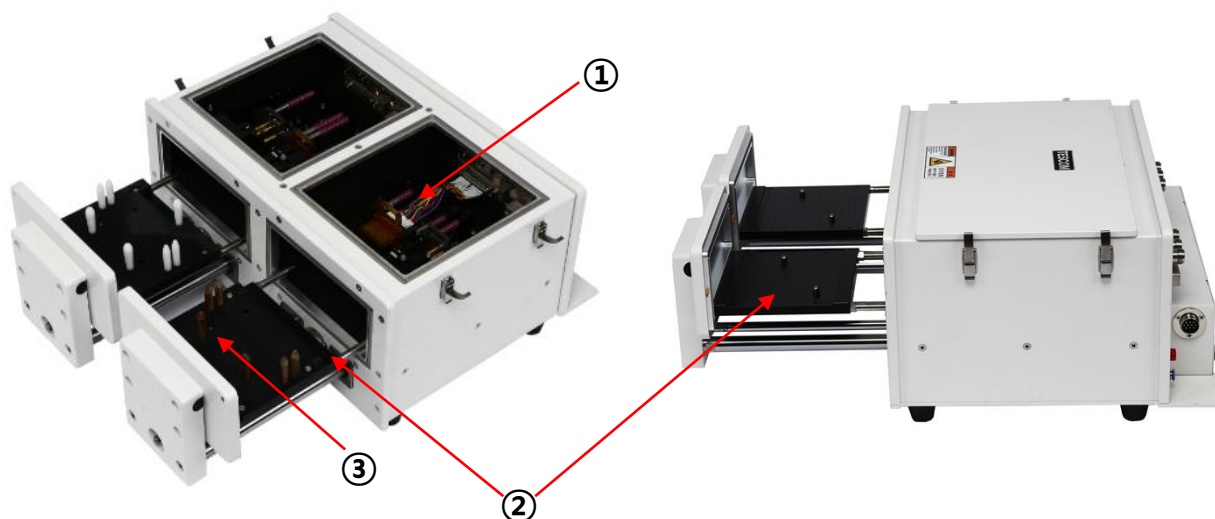
I/O Interface	Description / Order Number	Typical Data Rate / Line Voltage	*Typical Shielding
	DB25, 1000pF pi Filter / 3409-0009-1	3 Mbps / 100 VDC, 5 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz
	DB25, 100pF pi Filter / 3409-0014-1	10 Mbps / 100 VDC, 5 Amps max	>50 dB from 0.5 to 2 GHz >60 dB from 2 to 3 GHz >60 dB from 3 to 6 GHz
	DB9, 1000pF pi Filter / 3409-0008-1	3 Mbps / 100 VDC, 5 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz
	DB9, 100pF pi Filter / 3409-0010-1	10 Mbps / 100 VDC, 5 Amps max	>50 dB from 0.5 to 2 GHz >60 dB from 2 to 3 GHz >60 dB from 3 to 6 GHz
	USB 2.0 Filter / 3409-0018A-3	480 Mbps / 5 V, 500 mA / Max Current: 5 A	>60 dB from 0.5 to 2 GHz >70 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz
	USB 3.0 Filter(Active) / 3409-0042A-2	5000 Mbps/ 5 V, 600 mA / Max Current: 1.5 A	>80 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >75 dB from 3 to 6 GHz
	RJ-45 Filter / 3409-0022A	1 Gbit/s Copper-Line Ethernet (1000 BASE-T)	>60 dB from 0.5 to 2 GHz >70 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz
	DC Power Adaptor / 3406-0004A	50 VDC, 3 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >80 dB from 3 to 6 GHz
	DC Power Adaptor (Banana Jack Type) / 3406-0005A, 3406-0006A	50 VDC, 10 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >80 dB from 3 to 6 GHz
	AC Power Adaptor / 3103-0009A	250 VAC, 7 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >80 dB from 3 to 6 GHz

I/O Interface	Description / Order Number	Frequency Range / Impedance / V.S.W.R
	RF, N-SMA Connector / 3408-0038	From DC to 6 GHz / 50 Ω / 1.15 max
	RF, SMA-SMA Connector / 3408-0039	From DC to 8 GHz / 50 Ω / 1.15 max

- Each shielding effectiveness is measured when each I/O interface panel, which is shown above, is mounted.
- Above data was measured by Tescom, The Shielding Effectiveness might be different based on the measuring method and condition.
- This data has been measured under the condition that the cables are not connected to each filters. When the cables are connected it can affect the shielding performance.

Fixture

1. Connection Base + Antenna Coupler Holder
2. Door Cradle
3. DUT Base



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

