

HIGH PRECISION DIGITAL INDICATORS

LINEAR BALL BEARINGS FOR
TEN MILLION TIMES USE

Ø28MM STEM SUITABLE FOR
REINFORCED CLAMPING

DATA
OUTPUT


ATTENTION: RECHARGEABLE
BATTERY, FOR 24 HOURS
CONTINUOUS WORKING

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

- Linear ball bearings for ten million times use
- Ø28mm stem suitable for reinforced clamping
- Absolutely encoder, the original data remains after power off
- Adjustable resolution: 0.0002mm/0.00001"
0.001mm/0.00001"
0.01mm/0.0001"
- The display flips over when the spindle faces up
- Reading in digital and analog
- Data output
- Button function: data output, tolerance, data preset, data hold, direction change, max./min./TIR, power off time, on/off, mm/inch, analog pointer graduation adjustment, adjust resolution
- Power: rechargeable battery, for 24 hours continuous working
- Ruby probe




2140-6

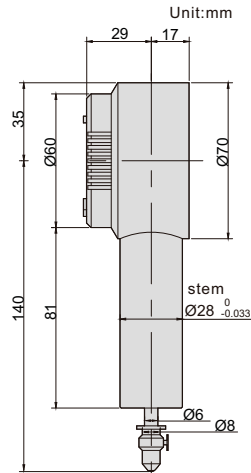


Code	Range	Accuracy	Hysteresis	Remark	Wireless
2140-6	0-6mm/0-0.24"	1.6µm	0.8µm	flat back	no
2140-6WL	0-6mm/0-0.24"	1.6µm	0.8µm	flat back	built-in wireless

warning when
over tolerance



analog pointer



max./min./TIR

