

Terminal Type DC V/A to DC V/A Isolated Transducer

MODEL TZ-5XA

NEW!



Input Specification

Code No.	Input signal	Input resistance	Input allowable range
0	0 to 5VDC	More than 1MΩ	-50 to +150% F.S
1	1 to 5VDC		
2	0 to 10VDC		
3	-10 to 10VDC		
4	0 to 1VDC		
5	0 to 0.1VDC		
6	0 to 0.06VDC		
7	0 to 20VDC		
8	-2 to 2VDC		
9	-5 to 5VDC		
A	4 to 20mADC	250Ω	
B	0 to 20mADC		
Y	Other than the above		

For Code No. Y limit of specifications

Voltage input : Less than +250 VDC and more than -250 VDC
 Minimum span : Less than +500 VDC and more than 60 mVDC
 Current input : Less than +50 mADC and more than -50 mADC
 Minimum span : Less than +100 mADC and more than 1 mADC

Output Specification

Code No.	Output signal	Allowable Loadresistance
0	0 to 5V DC	More than 2kΩ
1	1 to 5V DC	
2	0 to 10V DC	More than 4kΩ
3	-10 to 10V DC	Negative output:more than 10kΩ
4	-2 to 2VDC	More than 2kΩ Negative output:more than 10kΩ
5	-2.5 to 2.5VDC	
6	-5 to 5VDC	
7	0 to 4VDC	More than 2kΩ
A	4 to 20mADC	Less than 550Ω
B	0 to 20mADC	
Y	Other than the above	

For code No. Y limit of specifications

Voltage output : Less than +15 VDC and more than -12 VDC
 Minimum span : Less than +27 VDC and more than 0.06 VDC
 (Road resistance : 10kΩ at the output exceeding 10V, and a negative output)
 (Base accuracy : ±0.15 %F.S and temperature characteristic :
 ±0.03 %F.S/°C for a span of less than 1V)
 Current output : Less than +20 mADC and more than 0 mADC
 Minimum span : Less than +20 mADC and more than 1 mADC
 Outputs can be reversed for both voltage and current outputs.


General Specifications

Base Accuracy : ±0.1 %F.S (At 25±2°C)
 Power supply variation : ±0.06 %F.S
 Load resistance variation : ±0.06 %F.S
 Temperature characteristic : ±0.02 %F.S/°C
 Response time : Less than 50msec or 1msec (TYP)(0→90%)
 Front adjustments : ±5% for zero and span
 Insulation resistance : Between input and output/power supply ;
 More than 100MΩ at 500 VDC
 Dielectric strength : Between input and output/power supply ;
 For 1 min. at 1500VAC
 Power supply voltage : 24VDC ±10 %
 Consuming current : Less than 30mA (24VDC at voltage output)
 Less than 50mA (24VDC at current output)
 Operating ambient temperature : -5 to 50°C
 Operating ambient humidity : Less than 90 %RH (No-condensing)
 Storage temperature : -10 to 70°C
 Storage humidity : Less than 60%RH (No-condensing)
 Case material : ABS resin (Black) 94V-2
 Weight : Approx. 80g
 Vibration resistance : Frequency: 10 to 55Hz; ampliutde(half): 0.15mm to
 10 sweeps of 5 min each in X, Y, and Z directions

Features


- DC power supply 24V DC
- DIN rail mounting
- Input/Output/Power supply isolated

Ordering Code

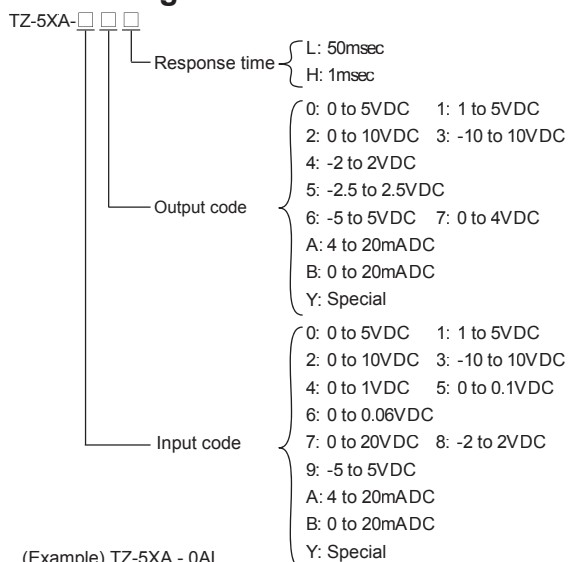


(Example) TZ-5XA - 0AL

Dimensions

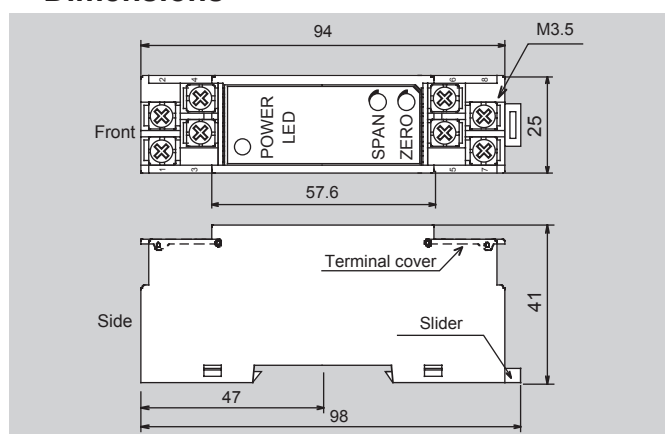

Connection Diagram

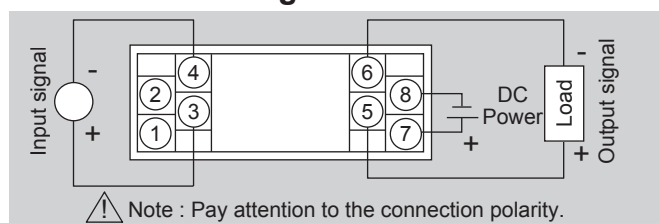

Block Diagram

