



Crimping Tool For Non-Insulated Terminals

TP-2 Capacity IEC/DIN:1.5/2.5mm² AWG:16/14 JIS:1.25/2mm² JIS




- Compact type body

For E-Type Sleeve Terminals

TP-2 TP-8 TP-8P TP-14
TP-5 TP-5M TP-5S TP-3

SAFE & SECURE! SPEEDY CRIMPING

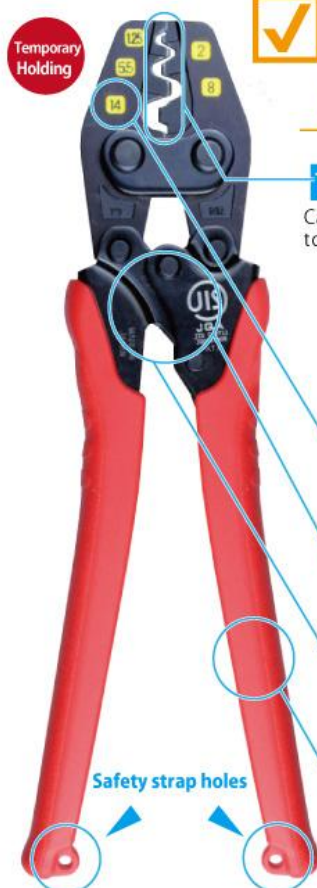

Continuous durability test 30,000 times Tensile test
Salt water spraying Heat aging
Electrical resistance Vibration fatigue



Cables can be inserted smoothly into terminals due to the deformless temporary holding function.




Tsunoda

*Temporary holding function is not loaded on TP-2



Colored size marks help you to check the size of crimping die even in the room where is unsufficiently lighted and improve your work efficiency.



Reducing required loads for each stroke of gear.

Handles don't open until crimping done.



Clear crimped mark!


Soft texture elastomer grip reduces fatigue of Continuous crimping works.

Crimping Tool Usable Terminals

[illegible]

Specifications

- Material | Alloy steel
- Head hardness [HRC] | 42~48
- Handle part hardness [HRC] | 43~47
- Handle cover | Elastomeric molded resin grips

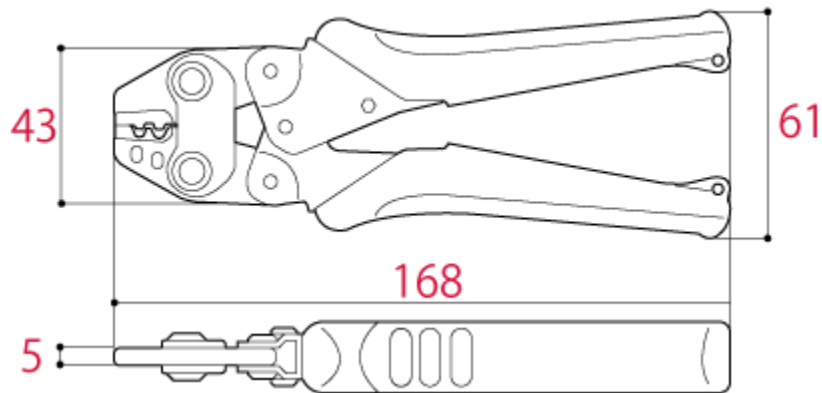

	Size[mm]				Weight [g]	EAN-code (4952269)
	Overall length	Head width	Head thickness	Handle width		
TP-2	168	43	5	61	260	113334

Terminal Size			
JIS standard mm ²	IEC • DIN standard mm ²	American Wire Gauge	Crimped Mark
1.25	1.5	16	1
2	2.5	14	2