



Crimping Tool For Non-Insulated Terminals

TP-5 Capacity IEC/DIN:1.5/2.5/6mm² AWG:16/14/10 JIS:1.25/2/5.5mm² JIS Parallel type



- Small and Light Weighted type.
- Crimping up to 6sq(IEC standard)/ AWG10 cables with one side hand.

CRIMPING TOOL

For E-Type Sleeve Terminals

TP-2 TP-8 TP-8P TP-14
TP-5 TP-5M TP-5S TP-3

TP-R

JQA

JIS C 9711
JO0314008



Continuous durability test 30,000 times **Tensile test**

Salt water spraying **Heat aging**

Electrical resistance

Vibration fatigue

Cables can be inserted smoothly into terminals due to the deformless temporary holding function.




Tsunoda

*Temporary holding function is not loaded on TP-2



Colored size marks help you to check the size of crimping die even in the room where is insufficiently lighted and improve your work efficiency.



Reducing required loads for each stroke of gear.

Handles don't open until crimping done.




Clear crimped mark!

Soft texture elastomer grip reduces fatigue of Continuous crimping works.

[illegible]

Specifications

- Material | Alloy steel
- Head hardness [HRC] | 42～48
- Handle part hardness [HRC] | 43～47
- Handle cover | Elastomeric molded resin grips

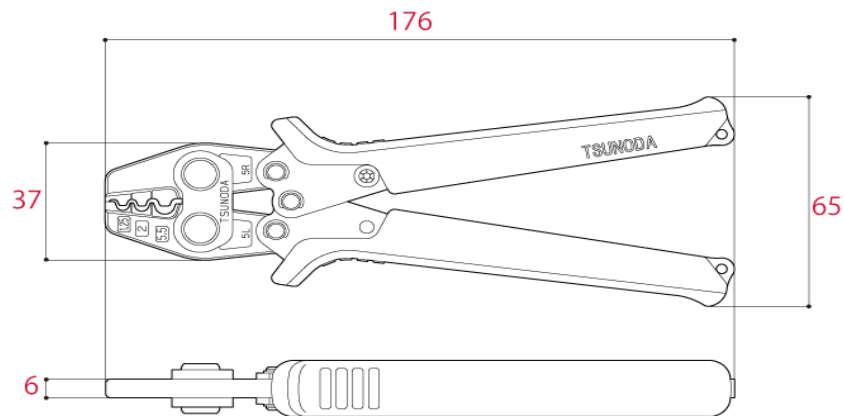

	Size[mm]				Weight [g]	EAN-code (4952269)
	Overall length	Head width	Head thickness	Handle width		
TP-5	176	37	6	65	220	113679

Terminal Size			
JIS standard mm ²	IEC • DIN standard mm ²	American Wire Gauge	Crimped Mark
1.25	1.5	16	1
2	2.5	14	2
5.5	6	10	5