
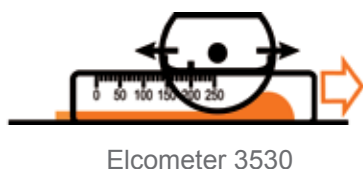


## Elcometer 3525 & 3530 Adjustable Baker Film Applicators

The Elcometer 3525 & 3530 are manufactured using the very latest machining techniques to ensure outstanding accuracy.

These Baker Film Applicators allow the user to select the specific gap size required. The coating thickness gap size can be set to produce either a uniform film or a film wedge. Each film applicator has thickness markings down each side for fast set up.

Available in two gap size ranges and a number of film widths, these stainless steel applicators can be used manually or with the Elcometer 4340 Motorised Film Applicator.

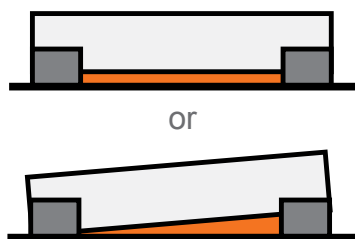

Elcometer 3530



STANDARDS:  
ASTM D 823-E

### Technical Specification

C

Part Number		Model	Film Thickness		Film Width <sup>+</sup>		Certificate
Metric	Imperial		µm	mils	mm	inches	
K0003525M001	-	Elcometer 3525/1	0 - 100	-	50	-	○
K0003525M002	-	Elcometer 3525/2	0 - 100	-	75	-	○
K0003525M003	-	Elcometer 3525/3	0 - 100	-	100	-	○
K0003525M004	-	Elcometer 3525/4	0 - 100	-	150	-	○
K0003525M005	-	Elcometer 3525/5	0 - 100	-	200	-	○
K0003525M006	-	Elcometer 3525/6	0 - 100	-	250	-	○
K0003530M001	K0US3530M001	Elcometer 3530/1	0 - 250	0 - 10	50	2	○
K0003530M002	K0US3530M002	Elcometer 3530/2	0 - 250	0 - 10	75	3	○
K0003530M003	K0US3530M003	Elcometer 3530/3	0 - 250	0 - 10	100	4	○
K0003530M004	K0US3530M004	Elcometer 3530/4	0 - 250	0 - 10	150	6	○
K0003530M005	K0US3530M005	Elcometer 3530/5	0 - 250	0 - 10	200	8	○
K0003530M006	K0US3530M006	Elcometer 3530/6	0 - 250	0 - 10	250	10	○

<sup>+</sup> Add 30mm (1.2") to the Film Width to calculate the total width of the applicator



Can be used with the Elcometer 4340 Motorised Film Applicator.

○ Optional Calibration Certificate available.