


Turntable Secondary Sealing Machine

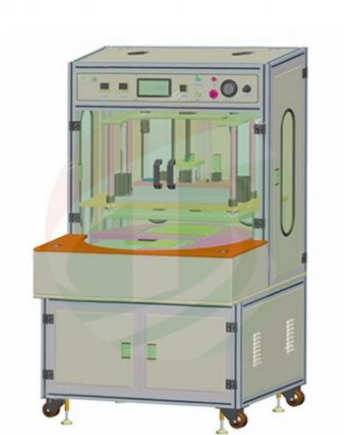

Turntable secondary sealing machine

- Item No.:TOB-YXY-TSS
- Order(Moq):1set
- Payment:L/C,T/T,Western Union, Paypal
- Product Origin:China
- Shipping Port:XIAMEN
- Lead Time:7days

Product Detail

Turntable secondary sealing machine

SPECIFICATIONS

The performance characteristics:

1. The ultimate vacuum sealing equipment for lithium battery after formation;
2. Double-turntable turns rolling work, high production efficiency;
3. Turntable cam splitter drive, segmentation accuracy within 30sec;
4. The upper head and bayonet when machine adjusted can separate from the vacuum chamber, convenient transfer machine and maintenance;
5. The heads with high-strength insulation board insulation protection, to minimize thermal deformation on head parallelism;
6. The head pressure is adjustable;
7. Configure with the electrolyte separator processing mechanism and pollution prevention;
8. Imported PLC, touch screen control display;
9. Imported thermostat components.

The main technical parameters :

Power	Single phase 220V ($\pm 10\%$) / 50HZ
Adaptation Specifications	Length $\leq 350\text{mm}$, width $\leq 350\text{mm}$ (including air bags)
The head length	Length $\leq 350\text{mm}$
Head temperature	230 °C, can be set up to compensate, control accuracy $\pm 2\text{ }^{\circ}\text{C}$
Cavity vacuum degree	-98Kpa
Package time	0 ~ 99.9s adjustable
Equipment production capacity	100 ~ 500EA / H (depending on the workers operating proficiency, small batteries which can encapsulate multiple)

PRODUCT DISPLAY

