


UNI-T®

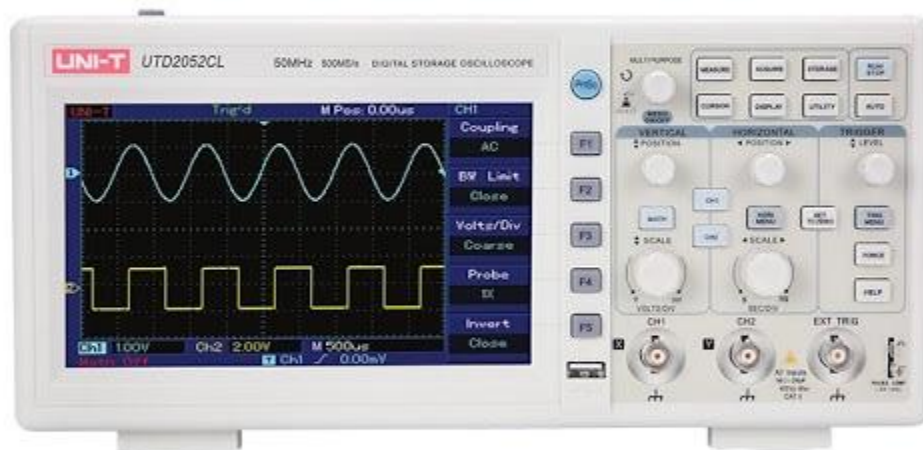

UTD2052CL Digital Storage Oscilloscope

Specifications

Model		UTD2052CL
Bandwidth		50MHz
Channels		2
Sampling rate		500MS/s
Rise time		<7ns
Memory depth		25kpts
Waveform capture rate		>2, 000wfms/s
Vertical scale (V/div)		1mV/div~20V/div
Time base scale (s/div)		10ns/div~50s/div
Storage methods		Setup, waveform, bitmap
Trigger specifications		
Frequency counter		6 bits
Trigger types		Edge, pulse width, video (UTD2025CL), alternate
Level range	Internal	±8div from screen center
	EXT	±3V
Holdoff range		80ns~1.5s
Edge trigger types		Rise, fall, rise & fall
Interfaces		USB-OTG
General Characteristics		
Power		100V~240V ACrms, 50Hz/60Hz
Display		7-inch TFT LCD, WVGA (400x240)
Product color		White and grey
Product net weight		2.2kg
Product size		306mm x 147mm x 122mm
Standard accessories		Probe x 2 (1x, 10x switchable), power cord, USB interface cable, PC software CD
Standard individual packing		Carton box
Standard quantity per carton		2pcs

Standard carton measurement	450mm x 420mm x 280mm
Standard carton gross weight	7.1kg