


# UNI-T®

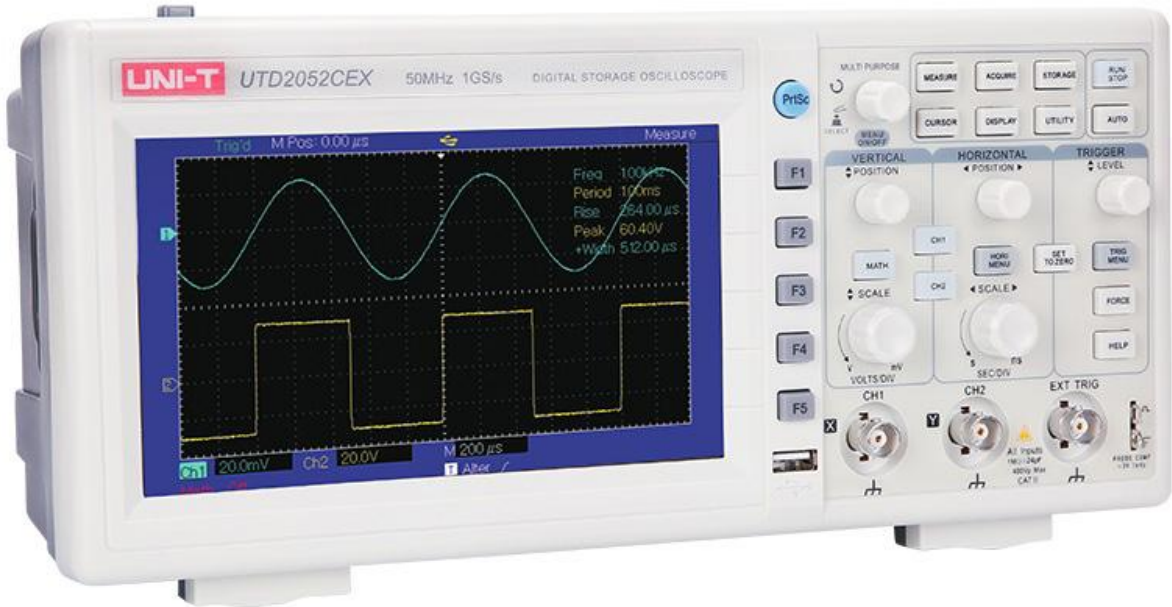

## UTD2052CEX Digital Storage Oscilloscope

Specifications	UTD2052CEX
Channels	2
Bandwidth	50MHz
Sample Rate	1GS/s
Rise Time	≤7ns
Memory Depth	25kpts
Waveform Acquisition Rate	≥2000wfms/s
Vertical Sensitivity (V/div)	1mV/div~20V/div
Timebase Range (s/div)	2ns/div~50s/div
Storage	Setup, Wave, Bitmap
Trigger Modes	Edge, Pluse, Alternate
Interface	USB OTG
<b>General Characteristics</b>	
Power	100-240VAC, 45-440Hz
Display	7 inches 64k Color TFT LCD, 800x480
Product Color	White and grey
Product Net Weight	2.2kg
Product Size (W×H×D)	306mm ×147mm × 122mm
Standard Accessories	Probex2 (1×,10× switchable), Power Cord, USB Cable, PC Software CD
Standard Individual Packing	Gift Box, English Manual
Standard Quantity Per Carton	2pcs
Standard Carton Measurement (L×W×H)	450mm× 420mm × 280mm
Standard Carton Gross Weight	8.5kg
Optional Accessories	LA Module