

## AVO75 Series

75 Watts

### Data Sheet

**Total Power:** 75 Watts  
**Input Voltage:** 36 - 75 V  
**# of Outputs:** Single

### SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Pre-bias start-up capability
- Open-frame structure

### SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



### Electrical Specifications

Input	
Input range:	36 - 75 VDC
Efficiency <sup>2</sup> :	91% @ 12V
Output	
Voltage tolerance:	+/-1.2% to +/-1.6%
Line regulation:	5V: 4mV; 12V: 9mV; Others: 1mV
Load regulation:	5V and 12V: 5mV; Others: 1mV
Noise/ripple:	3.3 Vo: 1.2V, 2.5V, 3.3V: 50mV; 5V, 5.0 Vo: 12V: 55mV; 1.8V: 45mV
Over voltage protection:	Auto-restart
Over temperature protection:	
Switching frequency:	310 KHz
Temperature coefficient:	±0.02/°C
Isolation	
I/O isolation:	2000 VDC min.

### Environmental Specifications

Operating ambient temperature range:	-40 °C to +85 °C
Storage temperature:	-55 °C to +125 °C
Humidity:	5% to 95% (non-condensing)
MTBF:	2.5 Million hours
RoHS Compliant	


### Ordering Information

Model number	Input voltage	Output voltage	Power
AVO75-48S1V2-4	36 - 75 Vin	1.2V @ 25A	30W
AVO75-48S1V2P-4	36 - 75 Vin	1.2V @ 25A	30W
AVO75-48S1V8-4	36 - 75 Vin	1.8V @ 25A	45W
AVO75-48S1V8P-4	36 - 75 Vin	1.8V @ 25A	45W
AVO75-48S2V5-4	36 - 75 Vin	2.5V @ 25A	62.5W
AVO75-48S2V5P-4	36 - 75 Vin	2.5V @ 25A	62.5W
AVO75-48S3V3-4	36 - 75 Vin	3.3V @ 20A	66W
AVO75-48S05-4	36 - 75 Vin	5V @ 15A	75W
AVO75-48S05-6	36 - 75 Vin	5V @ 15A	75W
AVO75-48S05P-4	36 - 75 Vin	5V @ 15A	75W
AVO75-48S12P-4	36 - 75 Vin	12V @ 6.3A	75W

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-4" = 4.8mm pin length
- "-P" = Positive enable

### Mechanical Drawings

Top & pin side view

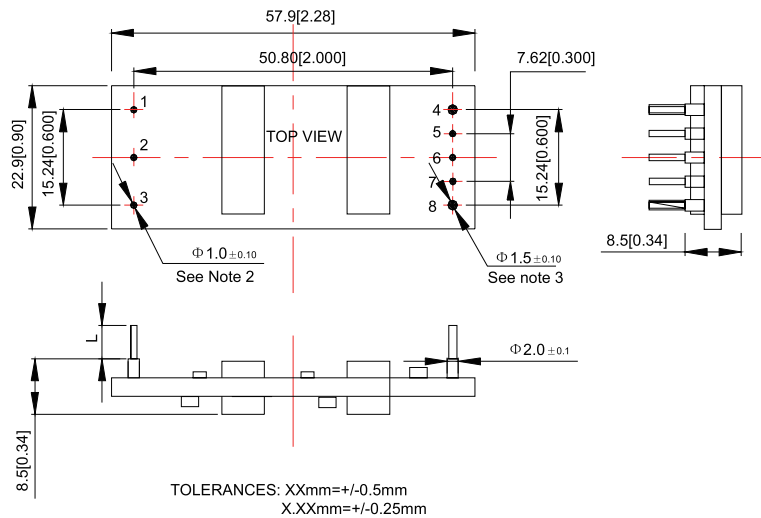

### Pin Length Option

Device Code Suffix	L
-4	4.8mm+/-0.5mm
-6	3.8mm+/-0.5mm
-8	2.8mm+/-0.25mm
NONE	5.8mm+/-0.5mm

Notes:

1. Un-dimensioned components are for visual reference only.
2. Pins 1~3, 5~7 are 1.0mm diameter with 2.0mm diameter standoff shoulders.
3. Pins 4, 8 are 1.5mm diameter with no standoff shoulders.

## Pin Designations

Pin No.	Function	Pin No.	Function
1	+Vin	5	+Sense
2	CNT	6	Trim
3	-Vin	7	-Sense
4	+Vo	8	-Vo

**Notes:**

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## WORLDWIDE OFFICES

**Americas**

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

**Europe (UK)**

Ground Floor Offices, Barberrry House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

**Asia (HK)**

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)