


DT-130/130A/131/132/133/131A/133A

The 130/131 contact thermometers offer fast response and laboratory accuracy. These thermometers offer 0.1°C/0.1°F resolution over the entire measurement ranges. A rugged holster protects both models. · Easy to use: Remove the protective sheath, press the ON/OFF button and insert into the testing area. · LCD screen shows readings in Fahrenheit or Celsius · Range: -40° to +250° C/ -40° to +482° F · 132 is pen type humidity & temperature meter.



Features:						
	130	130A	131/133	131A	132	133A
User Selectable °C or °F	*	*	*	*	*	*
Resolution 0.1°C/0.1°F	*	*	*	*	*	*
Sampling time 2.0 seconds	*	0.5S	*	0.5S	*	0.5S
Reaction time	10S	6S	10S	6S	10S	6S
LCD display	*	*	*	*	*	*
Max/Min Hold and Data Hold			*		*	*
Auto Power Off	*	*	*	*	*	*
Humidity & Temperature measurement	Temp	Temp	Temp	Temp	*	Temp
2.0mm Diameter probe shaft tip		*		*		*

Specifications								
Function	Range	Basic Accuracy	130A	131A	133A	130	131/133	132
Temperature	-40°C to 250°C / 482°F	±1.5%				*	*	*
	-40~200°C / 392°F		*	*	*			
Humidity	10%RH-95%RH	±3.5%						*




Pen type Thermometers

The 130/131 contact thermometers offer fast response and laboratory accuracy. These thermometers offer 0.1°C/0.1°F resolution over the entire measurement ranges. A rugged holster protects both models.

- Easy to use: Remove the protective sheath, press the ON/OFF button and insert into the testing area.
- LCD screen shows readings in Fahrenheit or Celsius
- Range: -40° to +250° C/ -40° to +482° F
- 132 is pen type humidity & temperature mete

• High Accuracy

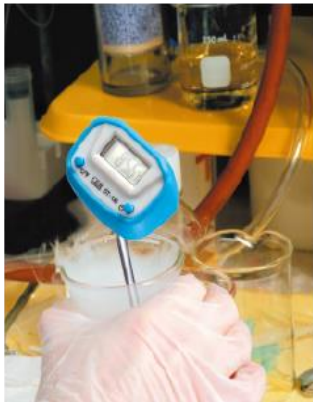

Size(HxWxD): 130:150mm x 40mm x 28mm
131/132/133:211mm x 32mm x 19mm
Weight: 130:19g
131/132/133:35g

Accessories : One LR44(1.5V) button battery and clamshell.