

AVO240 Series

240 Watts

Data Sheet


Total Power: 240 Watts
Input Voltage: 41 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Output voltage 12V
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Open-frame structure

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

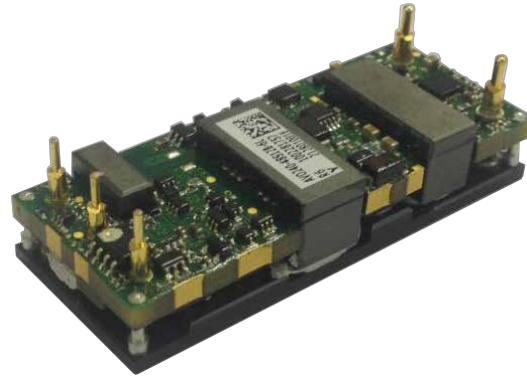

Electrical Specifications

Input	
Input range	41 - 75 Vdc
Efficiency ²	94% @ 12 Vo
Output	
Voltage tolerance	11.6 - 12.2 V
Line regulation	± 0.3%
Load regulation	± 0.5%
Noise/ripple	70 mV
Overvoltage protection Overtemperature protection	Auto-restart
Switching frequency	150 kHz
Temperature co-efficient	± 0.02/°C
Isolation	
I/O isolation	1500 Vdc min.

Environmental Specifications

Operating ambient temperature	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVO240-48S12-6L	41 - 75 Vin	12 V @ 20 A	240 W
AVO240-48S12B-6L	41 - 75 Vin	12 V @ 20 A	240 W
AVO240-48S12P-6L	41 - 75 Vin	12 V @ 20 A	240 W
AVO240-48S12PB-6L	41 - 75 Vin	12 V @ 20 A	240 W

Standard version is negative enable

“-6” = 3.8 mm pin length


“-4” = 4.8 mm pin length

“-P” = Positive enable

“-B” = baseplate

Mechanical Drawings

AVO240-48S12-6L

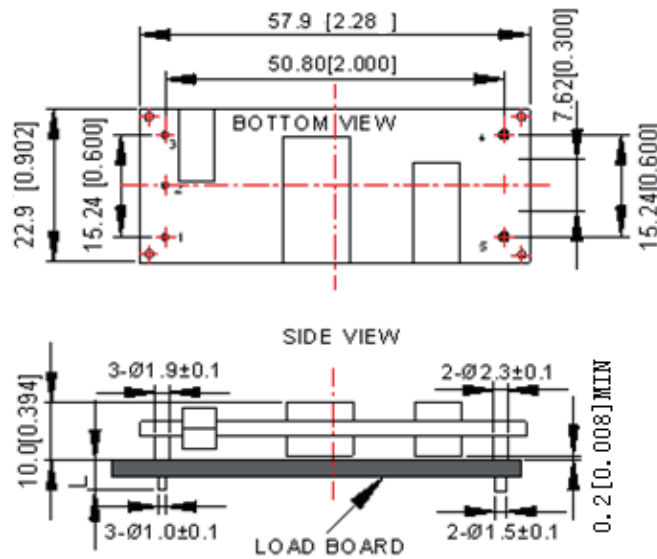


UNIT: mm[inch] BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Mechanical Drawings

AVO240-48S12B-6L

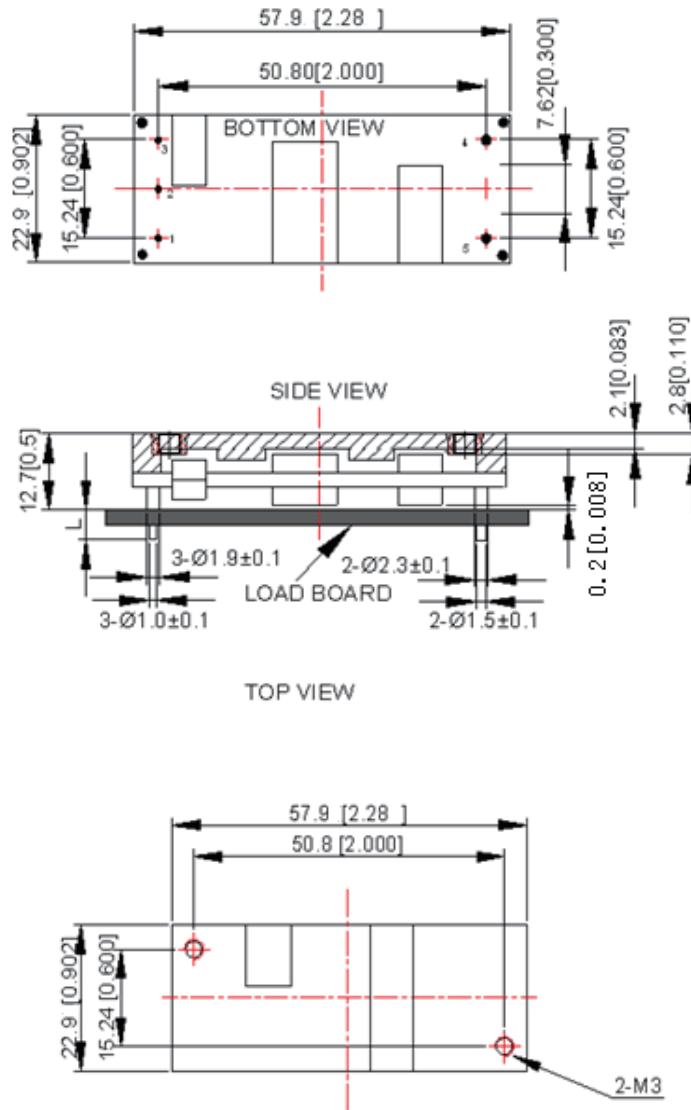

UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin length option

Device code suffix	L
-4	4.8 mm ±0.2 mm
-6	3.8 mm ±0.2 mm
-8	2.8 mm ±0.2 mm
None	5.8 mm ±0.2 mm

Pin Designations

Pin No.	Name	Function
1	V_{in+}	Positive input voltage
2	Remote ON/OFF	Remote control
3	V_{in-}	Negative input voltage
4	V_{o-}	Negative output voltage
5	V_{o+}	Positive output voltage

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberr House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN™
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com