

AGQ200 Series

132 Watts

Data Sheet


Total Power: 132 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Openframe structure with baseplate option

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

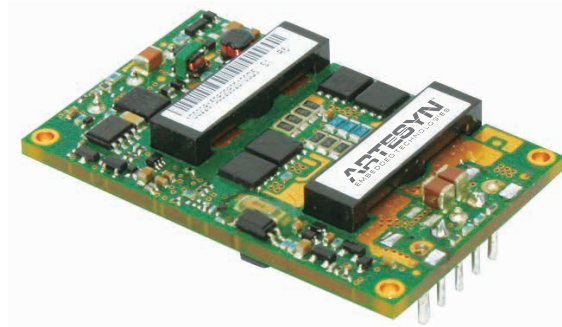

Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency ²	92% @ 3.3 Vo
Output	
Voltage tolerance	+/-1.6%
Line regulation	5 mV
Load regulation	Single output: 10 mV
Noise/ripple	3.3 Vo: 100 mV
Overvoltage protection	Hiccup
Overtemperature protection	Auto-restart
Switching frequency	280 KHz
Temperature co-efficient	±0.02 / °C
Isolation	
I/O isolation	2000 VDC min.

Environmental Specifications


Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	2 Million hours
RoHS Compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AGQ200-48S1V2-4L	36 - 75 Vin	1.2 V @ 40 A	48 W
AGQ200-48S1V2B-4L	36 - 75 Vin	1.2 V @ 40 A	48 W
AGQ200-48S1V2P-4L	36 - 75 Vin	1.2 V @ 40 A	48 W
AGQ200-48S1V2PB-4L	36 - 75 Vin	1.2 V @ 40 A	48 W
AGQ200-48S1V5-4L	36 - 75 Vin	1.5 V @ 40 A	60 W
AGQ200-48S1V5-6L	36 - 75 Vin	1.5 V @ 40 A	60 W
AGQ200-48S1V5B-4L	36 - 75 Vin	1.5 V @ 40 A	60 W
AGQ200-48S1V5P-4L	36 - 75 Vin	1.5 V @ 40 A	60 W
AGQ200-48S1V5PB-4L	36 - 75 Vin	1.5 V @ 40 A	60 W
AGQ200-48S1V8-4L	36 - 75 Vin	1.8 V @ 40 A	72 W
AGQ200-48S1V8B-4L	36 - 75 Vin	1.8 V @ 40 A	72 W
AGQ200-48S1V8P-4L	36 - 75 Vin	1.8 V @ 40 A	72 W
AGQ200-48S1V8PB-4L	36 - 75 Vin	1.8 V @ 40 A	72 W
AGQ200B-48S2V5-4L	36 - 75 Vin	2.5 V @ 40 A	100 W
AGQ200B-48S2V5B-4L	36 - 75 Vin	2.5 V @ 40 A	100 W
AGQ200B-48S2V5P-4L	36 - 75 Vin	2.5 V @ 40 A	100 W
AGQ200B-48S2V5PB-4L	36 - 75 Vin	2.5 V @ 40 A	100 W
AGQ200B-48S3V3-4L	36 - 75 Vin	3.3 V @ 40 A	132 W
AGQ200B-48S3V3-6L	36 - 75 Vin	3.3 V @ 40 A	132 W
AGQ200B-48S3V3B-4L	36 - 75 Vin	3.3 V @ 40 A	132 W
AGQ200B-48S3V3B-6L	36 - 75 Vin	3.3 V @ 40 A	132 W
AGQ200B-48S3V3P-4L	36 - 75 Vin	3.3 V @ 40 A	132 W
AGQ200B-48S3V3PB-4L	36 - 75 Vin	3.3 V @ 40 A	132 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-4" = 4.8 mm pin length
- "-L" = RoHS 6/6 compliance
- "-P" = Positive enable
- "-B" = Baseplate

Mechanical Drawings

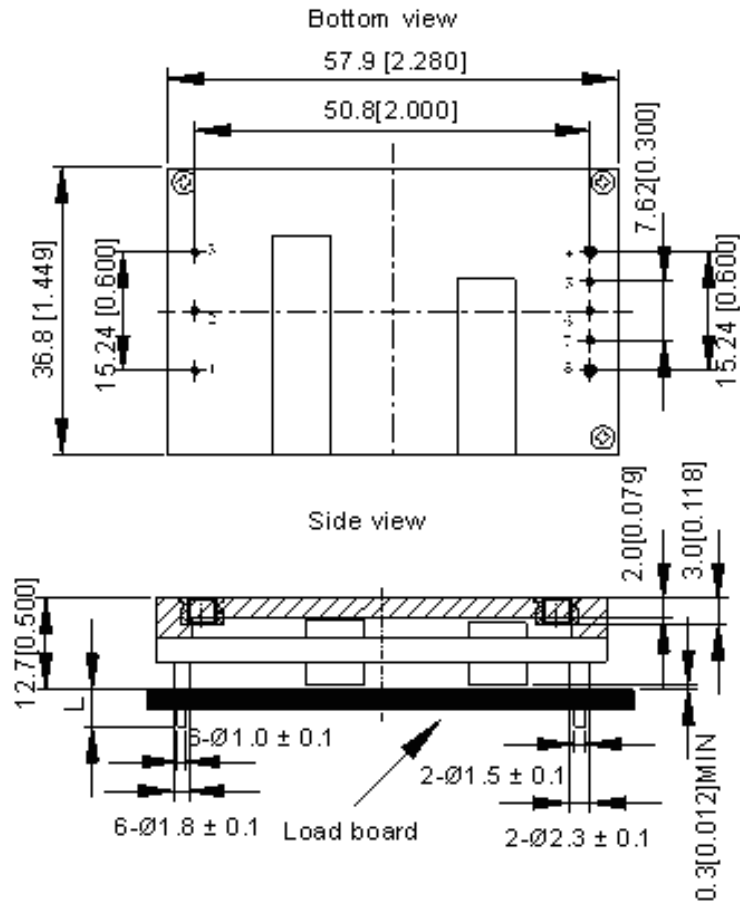

Unit: mm [inch]

Bottom view: pin on upside

Tolerance: X.Xmm \pm 0.5mm [X.X in. \pm 0.02in.]

X.XXmm \pm 0.25mm [X.XX in. \pm 0.01in.]

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	-Sense
6	Trim
7	+Sense
8	+V out

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN™
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com