

## AVQ400 Series

396 Watts

### Data Sheet

**Total Power:** 396 Watts  
**Input Voltage:** 36 - 75 V  
**# of Outputs:** Single

### SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Openframe structure with baseplate option
- Output over current protection

### SAFETY

- UL, cUL: UL62368
- TUV/CE: IEC/EN62368



### Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency	95% @ 12 Vo
Output	
Voltage tolerance	+/-1.6%
Line regulation	24 mV
Load regulation	60 mV
Noise/ripple	3.3 Vo: 150 mV
Overshoot protection	Hiccup
Overtemperature protection	Auto-restart
Switching frequency	140 KHz
Temperature co-efficient	±0.02/°C
Isolation	
I/O isolation	1500 VDC (2121 VDC for AVQ400-48S12B-6LN )

### Environmental Specifications


Operating ambient temperature range	-40° C to +85° C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	

### Ordering Information

Model number	Input voltage	Output voltage	Power
AVQ400-48S12B-4L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12B-6L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12PB-4L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12PB-6L	36 - 75 Vin	12 V @ 33 A	396 W
AVQ400-48S12B-6LN	36 - 75 Vin	12 V @ 33 A	396 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-4" = 4.8 mm pin length
- "-L" = RoHS 6 compliance
- "-P" = Positive enable
- "B" = Baseplate

### Mechanical Drawings

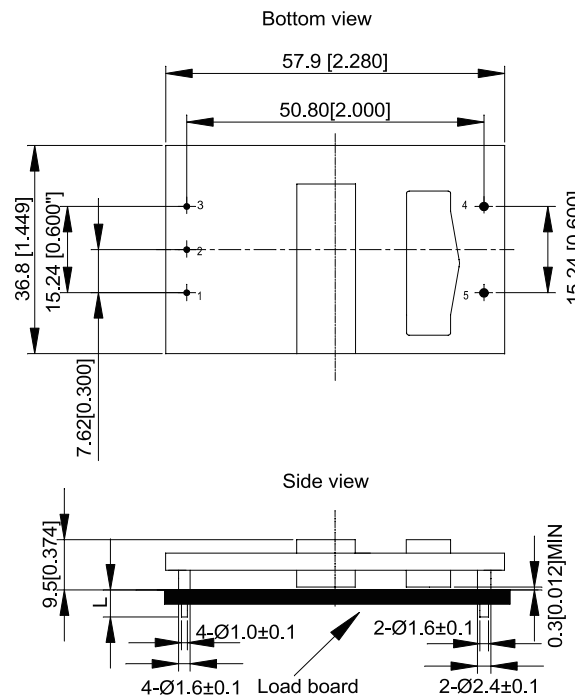

Unit: mm[inch]

Bottom view: pin on upsi

Tolerance: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

## Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	+V out

**Notes:**

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## WORLDWIDE OFFICES

**Americas**

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

**Europe (UK)**

Ground Floor Offices, Barberry House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

**Asia (HK)**

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN™**  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)