

Data Sheet

Total Power: 10 W
Input Voltage: 24 or 48 Vin
of Outputs: Single and Dual

SPECIAL FEATURES

- Ultra compact DIP package
23.8 x 13.7 x 8.0 mm
(0.94 x 0.54 x 0.31 inches)
- Efficiency up to 86%
- I/O-isolation 1500 VDC
- Ultra-wide 4:1 input range
- Operating temperature range
-40 °C to +80 °C
- Input filter meets EN 55022, class A
and FCC, level A
- Three year product warranty
- UL/cUL/IEC/EN 62368-1 (60950-1)
safety approval and CE marking

SAFETY

- UL/cUL 60950-1 recognition
(UL certificate), IEC/EN60950-1
- UL/cUL 62368-1 recognition
(UL Certificate), IEC/EN62368-1



Electrical Specifications

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	88% @ 24 Vo
Output	
Output voltage	5V, 12V, 15V, 24V, ±12V, ±15V
Voltage tolerance	±2.0%
Line regulation	0.8%
Load regulation	1.0%
Noise/ripple	55 mV
Overload protection	150% typ of Io max, Hiccup
Short circuit protection	Hiccup mode
Switching frequency	370 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm


Environmental Specifications

Operating ambient temperature range	-40 °C to +80 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	2538 Khrs calculated (Mil-HDBK-217F@25C ground benign)

Ordering Information

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Power
ATA03F18-L	9-36 Vdc	3.3 V	2700 mA	80%	8.9 W
ATA03A18-L	9-36 Vdc	5 V	2000 mA	83%	10 W
ATA03B18-L	9-36 Vdc	12 V	833 mA	87%	10 W
ATA03C18-L	9-36 Vdc	15 V	666 mA	88%	10 W
ATA03H18-L	9-36 Vdc	24 V	416 mA	88%	10 W
ATA03BB18-L	9-36 Vdc	±12 V	±416 mA	87%	10 W
ATA03CC18-L	9-36 Vdc	±15 V	±333 mA	87%	10 W
ATA03F36-L	18-75 Vdc	3.3 V	2700 mA	80%	8.9 W
ATA03A36-L	18-75 Vdc	5 V	2000 mA	83%	10 W
ATA03B36-L	18-75 Vdc	12 V	833 mA	87%	10 W
ATA03C36-L	18-75 Vdc	15 V	666 mA	88%	10 W
ATA03H36-L	18-75 Vdc	24 V	416 mA	88%	10 W
ATA03BB36-L	18-75 Vdc	± 12 V	±416 mA	87%	10 W
ATA03CC36-L	18-75 Vdc	± 15 V	±333 mA	87%	10 W

Mechanical Dimensions

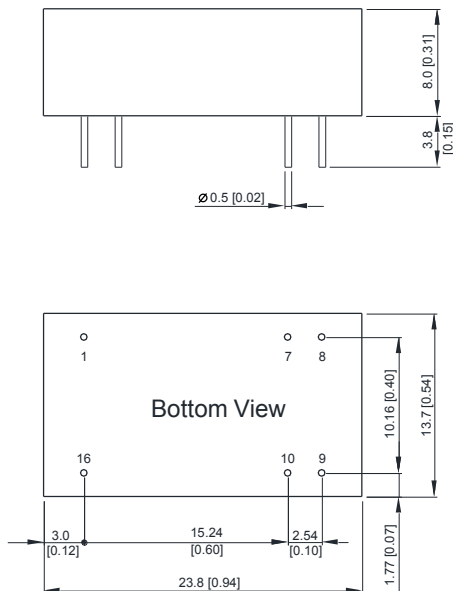

Pin Connectors

Pin No.	Single Output	Dual Output
1	-Vin	-Vin
7	No Connection	No Connection
8	No Connection	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- Pin pitch tolerance: ±0.25 (±0.01)
- Pin dimension tolerance: ±0.1 (±0.004)

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com