

AXA Series

25 Watts

Data Sheet

Total Power: 25 W
Input Voltage: 24 or 48 V
of Outputs: Single and Dual

SPECIAL FEATURES

- Package size 1.0" x 1.0" x 0.4"
- Ultra-wide 4:1 input range:
9 - 36 V_{in}, 18 - 75 V_{in}
- Very high efficiency up to 90%
- Operating temperature range:
-40 °C to +80 °C (with derating)
- Output voltage adjustable
- I/O isolation voltage 1500 Vdc
- Remote ON/OFF control
- Metal case with isolated baseplate
- CSA/UL/IEC/EN 60950-1 Safety Approval

SAFETY

- cUL/UL 60950-1
- IEC/EN 60950-1



Electrical Specifications

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	90% @ 12 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.2%
Load regulation	±1.0%
Noise/ripple	150 mV
Overload protection	150% typ of I _o max, hiccup
Short circuit protection	Hiccup mode
Switching frequency	285 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	2000 pF


Environmental Specifications

Operating ambient temperature range	-40 °C to +80 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	444 Khrs calculated


Ordering Information

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Max Out Cap	Power
AXA06F18-L	9 - 36 Vdc	3.3 V	6 A	87%	10300 μ F	19.8 W
AXA05A18-L	9 - 36 Vdc	5 V	5 A	89%	6800 μ F	25 W
AXA02B18-L	9 - 36 Vdc	12 V	2.09 A	89%	1200 μ F	25 W
AXA02C18-L	9 - 36 Vdc	15 V	1.67 A	90%	750 μ F	25 W
AXA01BB18-L	9 - 36 Vdc	\pm 12 V	\pm 1.04 A	89%	680 μ F	25 W
AXA01CC18-L	9 - 36 Vdc	\pm 15 V	\pm 0.84 A	89%	380 μ F	25 W
AXA06F36-L	18 - 75 Vdc	3.3 V	6 A	88%	10300 μ F	19.8 W
AXA05A36-L	18 - 75 Vdc	5 V	5 A	90%	6800 μ F	25 W
AXA02B36-L	18 - 75 Vdc	12 V	2.09 A	90%	1200 μ F	25 W
AXA02C36-L	18 - 75 Vdc	15 V	1.67 A	90%	750 μ F	25 W
AXA01BB36-L	18 - 75 Vdc	\pm 12 V	\pm 1.04 A	89%	680 μ F	25 W
AXA01CC36-L	18 - 75 Vdc	\pm 15 V	\pm 0.84 A	89%	380 μ F	25 W

Mechanical Dimensions

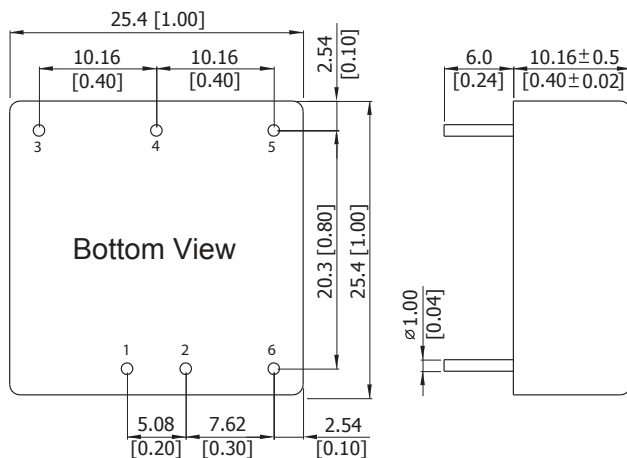

Pin Connections		
Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

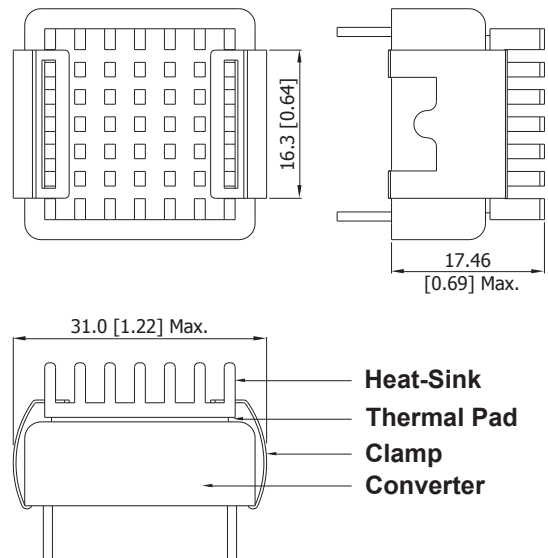

- All dimensions in mm (inches)
- Tolerance: X.X \pm 0.5 (X.XX \pm 0.02)
X.XX \pm 0.25 (X.XXX \pm 0.01)
- Pin diameter \varnothing 1.0 \pm 0.05 (0.04 \pm 0.002)

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2020 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com