

100AF MCCB ABN100c, ABN100e

Metasol



ABN102c



ABN103c




ABN104c

For more information

- Accessories » 7-1 page
- Trip curves » 8-1 page
- Drawings » 9-2 page
- Connection and mounting » 10-2 page

Ratings

Frame size		100AF			
Type and pole		N-type			
	2-pole	ABN102c		ABN102e	
	3-pole	ABN103c		ABN103e	
	4-pole	ABN104c		ABN104e	
Rated current, In		15-20-30-40-50-60-75-100A			
Rated operational voltage, Ue		AC: 690V			
		DC: 500V			
Rated insulation voltage, Ui		AC: 1000V			
Rated impulse withstand voltage, Uimp		8kV			
Rated short-circuit breaking		N-type			
capacity, Icu	AC	690V	5kA	7.5 (5)kA	
IEC 60947-2 (Icu)		480/500V	10kA	14 (10)kA	
		480V	18kA	31 (18)kA	
		415V	18kA	31 (18)kA	
		380V	22kA	31 (22)kA	
		220/250V	35kA	65 (35)kA	
	DC	500V (3P)	10kA	15 (10)kA	
		250V (2P)	10kA	15 (10)kA	
Ics=%xIcu			100%	()	
Protective function		Overload, short-circuit			
Type of trip unit		Thermal-magnetic			
Magnetic trip range		400A			
Life cycle ^{Note4)}	Mechanical	25,000 operations			
	Electrical	10,000 operations			
Connection	Standard	Front connection			
	Optional	Rear connection			
		Plug-in			
Mounting		Standard	Screw fixing		
Dimensions (mm)		Pole	2p	3p	4p
	a		50	75	100
	b		130	130	130
	c1 ^{Note1)}		60	60	60
	c2 ^{Note1)}		64	64	64
	d		82	82	82
Weight, kg		Standard	0.5	0.7	0.9
Certification		Pole	2p	3p	4p
CE marking		CE	o	o	o

^{Note1)} Depth by door cut size: c1 for large cut, c2 for small cut

^{Note2)} 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.

^{Note3)} The Ics (Service breaking capacity) of ABN100e are in ()

^{Note4)} Life cycle means not guarantee but limitation


(Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Ordering types


Breaker types

ABN-c type (18kA/460V)			
Rated current, In	2-pole	3-pole	4-pole
15 A	ABN102c/15	ABN103c/15	ABN104c/15
20 A	ABN102c/20	ABN103c/20	ABN104c/20
30 A	ABN102c/30	ABN103c/30	ABN104c/30
40 A	ABN102c/40	ABN103c/40	ABN104c/40
50 A	ABN102c/50	ABN103c/50	ABN104c/50
60 A	ABN102c/60	ABN103c/60	ABN104c/60
75 A	ABN102c/75	ABN103c/75	ABN104c/75
100 A	ABN102c/100	ABN103c/100	ABN104c/100

ABN-e type (31kA/460V)			
Rated current, In	2-pole	3-pole	4-pole
15 A	ABN102e/15	ABN103e/15	ABN104e/15
20 A	ABN102e/20	ABN103e/20	ABN104e/20
30 A	ABN102e/30	ABN103e/30	ABN104e/30
40 A	ABN102e/40	ABN103e/40	ABN104e/40
50 A	ABN102e/50	ABN103e/50	ABN104e/50
60 A	ABN102e/60	ABN103e/60	ABN104e/60
75 A	ABN102e/75	ABN103e/75	ABN104e/75
100 A	ABN102e/100	ABN103e/100	ABN104e/100

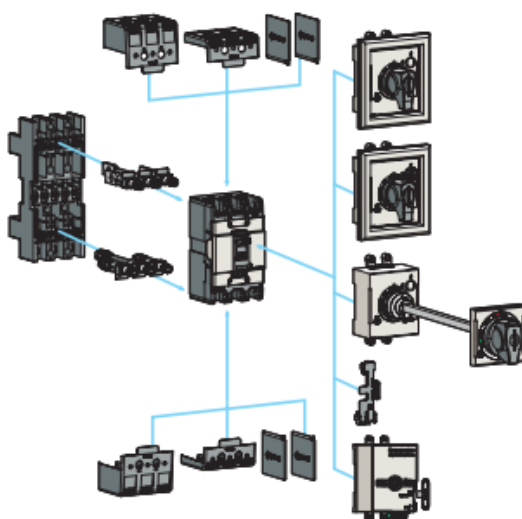

Accessories



Electrical auxiliaries

AX	Auxiliary switch
AL	Alarm switch
AX+AL	Combination switch
SHT	Shunt trip
UVT	Undervoltage trip



Maximum possibilities

T-position	One of above auxiliaries
R-position	Option of AX or AL or AX+AL

Note) For more detail see 7-1 page



External accessories

ABN100c	Name
IB13	Insulation barrier
TCL13	Terminal cover (Long) - Inde type, D-handle type, N-handle type
TCS13	Terminal cover (Short) - Inde type, D-handle type, N-handle type
N-30c	Rotary handle (Direct)
DH100	Rotary handle (Direct)
DHK100	Rotary handle (Direct, key lock)
EH100	Rotary handle (Extended)
RTB1	Rear terminal (Bar)
RTR1	Rear terminal (Round)
PB-A3	Plug-in kit
Handle lock	
MOP-M1	Remote operation

Note) For more detail see 7-9 - 7-10 page

- Inde type: This cover is used without auxiliary handle.
- D-handle type: This cover is used with D-handle.
- N-handle type: This cover is used with N-handle.