
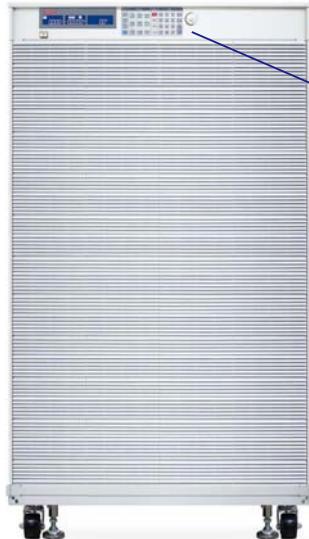


36300E Series Compact High Power DC Electronic Load (1250V / 50KW,60KW)

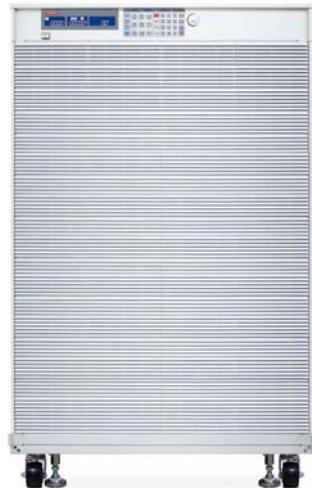

1250V

50kW
60kW

2 Models Type



Features

- Maximum power up to 480KW
- Maximum up to 8 units master / slave parallel control
- 5 digit V/A/W Meter.
- High-speed measurement and communication transmission.
- Large LCD Display、setting values can be adjusted by rotary knob or push button.
- Voltage、Current and Watt value can be displayed simultaneously.
- Capable for Power Factor Correction (PFC) Test.
- OCP、OPP test function automatically.
- Power ON status can be set.
- CC, CR, CV, CP, Dynamic and Short operation mode.
- SHORT time setting.
- Protections against I,W,°C and over-voltage alert.
- Voltage meter display the polarity positive ("+") or negative ("−") is selectable.
- Support MPPT CC、CR、CV test function for solar panel
- Optional Interface : GPIB、RS232、USB、LAN.
- Provide battery BMS protection test function (option)
- Optional 9923 load current waveform generator to provide the battery actual discharge current waveform simulation (option)

Descriptions

- 36300E Series has its own control and display panel, CC / CR / CV / CP / Dynamic modes, 150 sets Store / Recall memory which provides load set-up more efficiently, also can be remote controlled via GPIB、RS232、USB and LAN interface.
- SHORT time setting and SHORT_VH, SHORT_VL setting function, also can measure Short Voltage and Current.
- Dynamic can be simulated under CC, CP mode. The current Rise / Fall slew rate can be adjusted individually and there is an external signal input for a Arbitrary Waveform to simulate load current.
- Single key for OCP、OPP test function will be more efficiency and accuracy on OCP、OPP testing.
- Programmable Load ON/OFF voltage, GO/NG meter check, Voltage meter display "+" or "-" is selectable and 150 sets Store/Recall larger memory is much advance feature for each different application.
- 150 sets test parameter and status storage function, user can recall the storage memory real time in accordance with the auto sequence requirement.
- Maximum Voltage up to 1000V provide an idea testing solution for Power Factor Correction test.
- Master / Slave control units maximum are up to 1 MASTER, 7 SLAVES.

Applications

- Voltage / Current source
- SMPS transient response
- CV/Current limit testing and battery emulation
- Battery charger
- Battery discharge
- R&D Quality Control
- ATE system
- Production testing

Specifications

MODEL	36350E		36360E					
Power	50KW		60KW					
Current	0 ~ 25A	0 ~ 250A	0 ~ 30A	0 ~ 300A				
Voltage			0 ~ 1250V					
Protections								
Over Power Protection (OPP)	105%							
Over Current Protection (OCP)	104%							
Over Voltage Protection (OVP)	104%							
Over Temp Protection (OTP)	Yes							
Constant Current Mode								
Range ¹	25A	250A	30A	300A				
Resolution	0.42mA	4.2mA	0.48mA	4.8mA				
Accuracy	$\pm (0.1\% \text{ of Setting} + 0.2\% \text{ of Range})$							
Constant Resistance Mode								
Range	5712Ω ~ 4.76Ω	4.76Ω ~ 0.24Ω	5004Ω ~ 4.17Ω	4.17Ω ~ 0.21Ω				
Resolution	3.5014μS	0.08mΩ	3.9968μS	0.07mΩ				
Accuracy	$\pm 0.2\% \text{ of (Setting + Range)}$							
Constant Voltage Mode								
Range	0~1250V							
Resolution	20mV							
Accuracy	$\pm 0.05\% \text{ of (Setting + Range)}$							
Constant Power Mode								
Range	5000W	50000W	6000W	60000W				
Resolution	84mW	840mW	96mW	960mW				
Accuracy	$\pm 0.5\% \text{ of (Setting + Range)}$							
Constant Voltage Mode + Constant Current Mode								
Range	1250V	250A	1250V	300A				
Resolution	20mV	4.2mA	20mV	4.8mA				
Accuracy	$\pm 1.0\% \text{ of (setting + Range)}$							
Constant Voltage Mode + Constant Power Mode								
Range	1250V	50000W	1250V	60000W				
Resolution	20mV	840mW	20mV	960mW				
Accuracy	$\pm 1.0\% \text{ of (setting + Range)}$							
MPPT Mode								
Algorithm	P & O + Scanning							
Load mode	CC, CR,CV (MPPT C, R, V)							
Sampling interval	10ms~2000ms ; resolution 1ms							
P&O interval	10ms~2000ms ; resolution 1ms							
Memory situation	Discard old data and keep catching new data							
Dynamic Mode								
Timing								
Thigh & Tlow	0.050~9.999 / 99.99 / 999.9 / 9999ms							
Resolution	0.001 / 0.01 / 0.1 / 1ms							
Accuracy	1μs / 10μs / 100μs / 1ms + 50ppm							
Slew Rate	0.02A ~ 1.25A/μS	0.2A ~ 12.5A/μS	0.024A ~ 1.5A/μS	0.24A ~ 15A/μS				
Resolution	0.005A/μS	0.05A/μS	0.006A/μS	0.06A/μS				
Min. Rise Time	20μs(typical)							
Current								
Range	0 ~ 26.25A	26.25 ~ 250A	0 ~ 30A	30 ~ 300A				
Resolution	0.42mA	4.2mA	0.48mA	4.8mA				
Measurement								
Voltage Read Back								
Range (5 Digital)	0 ~ 125V	125 ~ 1250V	0 ~ 125V	125 ~ 1250V				
Resolution	2mV	20mV	2mV	20mV				
Accuracy	$\pm 0.025\% \text{ of (Reading + Range)}$							
Current Read Back								
Range (5 Digital)	0 ~ 26.25A	26.25 ~ 250A	0 ~ 30A	30 ~ 300A				
Resolution	0.42mA	4.2mA	0.48mA	4.8mA				
Accuracy	$\pm 0.1\% \text{ of (Reading + Range)}$							
Power Read Back								
Range (5 Digital)	10000W	50000W	10000W	60000W				
Resolution	0.1W	1W	0.1W	1W				
Accuracy	$\pm 0.125\% \text{ of (Reading + Range)}$							
General								
Short Circuit								
Current	250A							
Load ON Voltage								
Load OFF Voltage	0 ~ 250V							
Power Consumption	5450Wmax							
Operating Temperature ²	0~40°C							
Dimension (HxWxD)	1353x853x766mm							
HxWxD (Not included wheels)	1249x853x766mm							
Weight	510 Kg							
Safety & EMC	CE							

Cooling : Advanced Fan Cooled

Input AC Power : ① Load-20KW (include) : 100~230 Vac ±10% , 50/60Hz
 ② Load-25KW above (include) : 200~230 Vac ±10% , 50/60Hz

Note*1 : The range is automatically or forcing to range II only in CC Mode

Note*2 : Operating temperature range is 0~40°C , all specifications apply for
 25°C±5°C

Order Information

Optional interface :

- ① GPIB Card
- ② RS232 Card
- ③ USB Card
- ④ LAN Card

Options :

Hook ring



x4



36350E 1250V · 250A · 50KW



36360E 1250V · 300A · 60KW