

## SIL25C Series

### C-Class Non-Isolated

#### Data Sheet

**Total Power:** 25 Amps  
**Input Voltage:** 4.5 - 13.8 Vdc  
**# of Outputs:** Single

#### SPECIAL FEATURES

- 25 A current rating
- Input voltage range: 10.2 - 13.8 Vdc
- Nominal output voltage: -5.05 V
- Industry-leading value
- Cost optimized design
- Excellent transient response
- Output voltage adjustability
- Supports silicon voltage migration
- Reduced design-in and qual time
- Designed in reliability: MTBF of 3 million hours per Telcordia SR-332
- RoHS compliant
- Two year warranty

#### SAFETY

- UL, cUL CAN/CSA 22.2 No. TBD
- UL60950 File No. TBD
- TÜV Product Service (EN60950) Certificate No. TBD
- CB report and certificate to TB



#### Electrical Specifications

Input		
Input voltage range	Nominal 12 V	10.2 - 13.8 +Vdc
Input current	No load Remote OFF	400 mA 30 mA
Input current (max.)	See Note 4	14.2 A max. @ Io max. and Vin = 10.8 V
Input reflected ripple	See Note 2	300 mA (pk-pk)
Remote ON/OFF Logic compatibility ON OFF		Logic high >2.4 Vdc <1.2 Vdc
Start-up time	See Note 5	Power up: 10 ms Remote ON/OFF: 10ms
Turn ON threshold		10 Vdc
Turn OFF threshold		9.5 Vdc
Output		
Voltage adjustability	See Note 1	-4.5 to -5.5 Vdc
Output setpoint accuracy	Using 1.0% trim resistors	±3.0%
Line regulation	Low line to high line	±1.0%
Load regulation	Full load to min. load	±1.0%
Min./max. load		0 A/25 A
Ripple and noise 5 Hz to 20 MHz	See Note 2	100 mV pk-pk 40 mV rms
Transient response	See Note 3	130 mV typical deviation 150 µs recovery to within regulation band

All specifications are typical at nominal input, full load at 25 °C, unless otherwise stated.

## General Specifications

Efficiency		90%
Switching frequency	Fixed (2 phase)	250 kHz typ. per phase
Approvals and standards	(See Note 7)	TÜV Product Services EN60950, UL/cUL60950
Material flammability		UL94V-0
Weight		28.3 g (1 oz)
MTBF	Telcordia SR-332	3,000,000 hours

## Environmental Specifications

Thermal performance	Operating ambient temperature	-40 °C to +80 °C
(See Note 8)	Non-operating temperature	-40 °C to +125 °C
<b>Protection</b>		
Short-circuit	Hiccup, non-latching	
Over-temperature	Hiccup, non-latching	
<b>Recommended System Capacitance</b>		
Input capacitance	(See Note 9)	3 x 270 μF
Output capacitance	(See Note 9)	3 x 680 μF

## Ordering Information

Model Number <sup>(1)</sup>	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical)	Regulation	
							Line	Load
SIL25C-12SNEG-VJ	125 W	10.2 - 13.8 Vdc	-5.05 V	0 A	25 A	90%	±1.0%	±1.0%

## Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Number of Outputs	Output Voltage	Mounting Option	Packaging Options
<b>SIL</b>	<b>25</b>	<b>C</b>	<b>12</b>	<b>S</b>	<b>NEG</b>	<b>V</b>	<b>J</b>
SIL = Single In Line	25 = 25 Amp	C = Cost Optimized	12 = 10.2 - 13.8 Vdc	S = Single Output	NEG = -5.05V	V = Vertical	J = Pb free (RoHS 6/6 compliant)



## Notes:

1. Uses external resistor. See Application Note 148 for details.
2. Measured with external filter. See Application Note 148 for details.
3. di/dt = 1 A/µs, Vin = Nom, Tc = 25 °C, load change = 0.5 Io max to 0.75 Io max and 0.75 Io max to 0.5 Io max.
4. External input fusing is recommended.
5. Power up is the time from application of dc input to POWER GOOD high. emote ON/OFF asserted high to POWER GOOD high.
6. Signal line assumed <3 m.
7. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
8. See Application Note 148 for operation above 50°C.
9. See Application Note 148 for ripple current requirements.
10. Output can be adjusted from -4.5 Vdc to -5.5 Vdc.
11. NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.



## Mechanical Drawings

### Pin Assignments

Pin	Function
1	Trim
2	Not Connected
3	Ground
4	Power Good
5	No Pin
6	Not Connected
7	Ground
8	Ground
9	Remote ON/OFF
10	Remote Sense (GND)
11	Remote Sense (Vo)
12	Vin
13	Vin
14	Vin
15	Vout
16	Vout
17	Ground
18	Vout
19	Ground
20	Vout
21	Ground
22	Vout
23	Ground
24	Vout

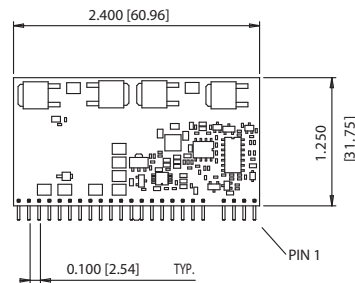

Dimensions in Inches Approx Metric  
Equiv in (mm)  
Third Angle Projections  
Tolerances (unless otherwise specified)  
3 Places 0.010 (0.250)

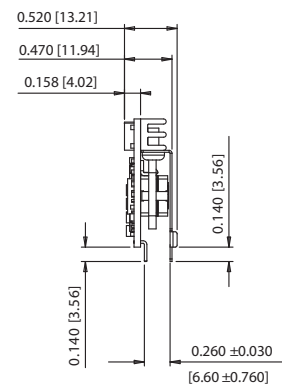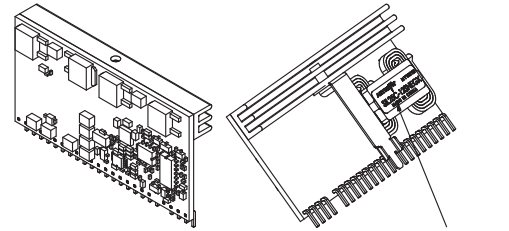

## WORLDWIDE OFFICES

### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

### Europe (UK)

Ground Floor Offices, Barberry House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)