


# UXA X-Series Signal Analyzer, Multi-touch N9041B

This N9041B UXA configuration guide will help you determine which performance options, measurement applications, accessories, and services to include with your N9041B UXA or to add as upgrades to an existing N9041B UXA

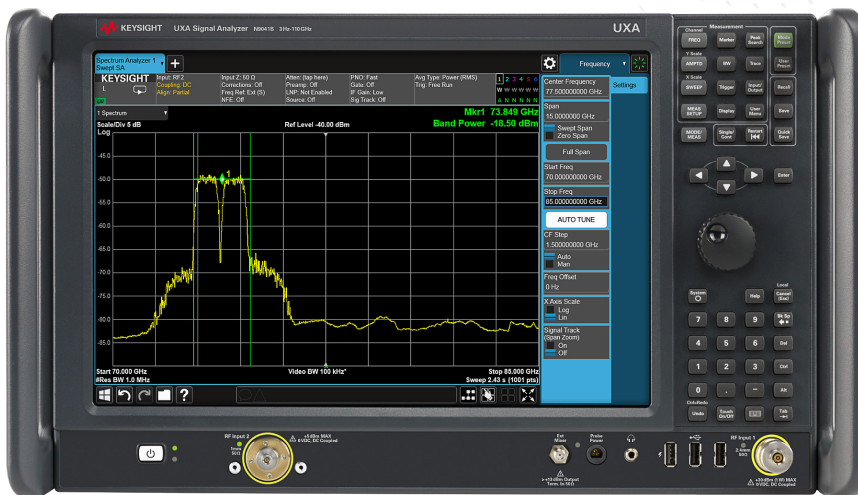

## What Is Included In the Base Product

The “standard” options and accessories come with the UXa base instrument at no additional charge and do not need to be ordered. They include:

### Get More Information

For a summary of specifications, refer to the N9041B data sheet (literature number 5992-1822EN).

- Spectrum analyzer software application
  - Getting Started Guide
  - UXa start-up assistance
  - RF input (Input 1) for frequency range of 2 Hz to 50 GHz (2.4 mm connector, male)
  - RF Input (Input 2) for frequency range of 2 Hz to 90 or 110 GHz (1.0 mm connector, male)
  - Enhanced phase noise
  - Fast sweep capability
  - 25 MHz IF analysis bandwidth
  - 1 GHz bandwidth auxiliary IF output
  - Enhanced display package
  - External mixing for frequency coverage extension up to 1.1 THz
  - Microwave preselector bypass for frequencies between 3.6 and 50 GHz
  - Low noise path for improved sensitivity between 3.6 and 50 GHz
  - Low frequency enabled
  - Fine step mechanical attenuator up to 50 GHz
  - Digital processor with 2 GB capture memory
  - LO/IM nulling
  - Noise Floor Extension; instrument alignment (currently only for Input 1)
  - Precision frequency reference
  - Real-time data link for real-time IQ data streaming up to 40 MHz
  - Quad-core, high-performance processor, 16 GB RAM with flash calibration file memory
  - Removable solid-state drive, 160 GB
  - Microsoft Windows 10 operating system
  - Country-specific power cord
  - Front and rear panel covers for protection during transit
  - A millimeter-wave (mmW) connector kit that contains adaptors and a torque wrench.
- See the accessories section of this document for additional information

# Configure Your Keysight UXA Signal Analyzer

This step-by-step process will help you configure your UXA signal analyzer. Tailor the performance to meet your requirements.

For a summary of specifications, refer to the UXA signal analyzer data sheet (5992-1822EN).

## Step 1. Select maximum frequency range (required option)

Description	Option number	Additional information
Frequency range, 2 Hz to 90 GHz	N9041B-590	Input 2 (1.0 mm connector, male), provides continuous sweep from 2 Hz to 90 GHz
Frequency range, 2 Hz to 110 GHz	N9041B-5CX	Input 2 (1.0 mm connector, male), provides continuous sweep from 2 Hz to 110 GHz
Frequency range, 2 Hz to 50 GHz	Standard	Input 1 (2.4 mm connector, male), provides continuous sweep from 2 Hz to 50 GHz

## Step 2. Add a preamplifier

Description	Option number	Additional information
Preamplifier, 100 kHz to 50 GHz	N9041B-P50	Improves sensitivity up to 50 GHz for both input 1 and 2

## Step 3. Choose an attenuator

Description	Option number	Additional information
Mechanical attenuator (1)	Standard	2 dB steps, 0 to 70 dB; licensed as N9041B-FSA; up to 50 GHz
Electronic attenuator up to 3.6 GHz	N9041B-EA3	Add in addition to the mechanical attenuator; 1 dB steps, 0 to 24 dB
Mechanical attenuator (2)	Standard	Adjustable to 0, 6, 14, or 20 dB; for Input 2 only

## Step 4. Choose analysis bandwidth

Description	Option number	Additional information
25 MHz analysis bandwidth	Standard	Licensed as N9041B-B25
40 MHz analysis bandwidth	N9041B-B40	Extends the analysis bandwidth to 40 MHz
1 GHz analysis bandwidth	N9041B-H1G	Extends the analysis bandwidth to 1 GHz; provides rear panel IF2 output connector (IF=750 MHz)
Microwave preselector bypass	Standard	Bypass the microwave preselector for wider bandwidth IF; licensed as N9041B-MPB; up to 50 GHz

## Step 5. Choose performance options

Description	Option number	Additional information
Digital processor with 2 GB capture memory	Standard	Licensed as N9041B-DP2
Digital processor with 4 GB capture memory	Standard	Standard in instruments when Option H1G is installed; supports analysis bandwidth up to 255 MHz; licensed as N9041B-DP4
Enhanced phase noise performance	Standard	DDS-based LO assembly; licensed as N9041B-EPO
External mixing	Standard	Provides external mixing with Keysight and third party mixers; single port <sup>1</sup> for LO out and IF in (SMA female); licensed as N9041B-EXM
Fast sweep capability	Standard	Improves sweep speed in swept-tune mode; licensed as N9041B-FS1/FS2 <sup>2</sup>
LO/IM nulling	Standard	Minimizes the LO feed-thru and the intermodulation distortion; licensed as N9041B-NUL
Low noise path	Standard	Improves sensitivity (DANL) in frequency bands above 3.6 GHz without degrading dynamic range; licensed as N9041B-LNP
Full bypass path	Standard when H1G is ordered	Bypass the microwave preselector and enable the low noise path for improved sensitivity on Input 1 from 3.6 GHz to 50 GHz. Standard in instruments when Option H1G is installed; licensed as N9041B-FBP
Noise Floor Extension	Standard	Improves displayed average noise level (DANL), instrument alignment based implementation; licensed as N9041B-NF2; currently only for Input 1
Precision frequency reference	Standard	Aging rate: $\pm 1 \times 10^{-7}$ /year; licensed as N9041B-PFR

1. When used with Keysight 11970 Series external mixers, an external diplexer is required. Recommended diplexer can be purchased from Keysight as N9029AE13, or from OML Inc. as DPL313B.
2. The FS1 improves the sweep speed by up to 50x and the FS2 further gains speed improvements for the narrower resolution bandwidth (RBW) settings

## Step 6. Add real-time spectrum analysis

Note: Keysight offers 4 license types for the measurement applications and instrument features, in 2 license terms: Perpetual or Time-based.

License types:

- **Node-locked:** Allows you to use the license on one instrument/computer at a time
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool
- **Floating:** Allows you to access the license on the networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased
- **USB Portable:** Allows you to access the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately

License terms:

- **Perpetual:** License can be used in perpetuity. For perpetual license holders, a separate support contract is required to access Keysight technical support and software updates
- **Time-based:** License is time limited to a defined period, such as 12-months. A valid support contract is included in the pricing for time-based licenses.

For detailed information, we strongly recommend you visit the X-Series measurement application collection page: [www.keysight.com/find/xseriesapps](http://www.keysight.com/find/xseriesapps)

Description	Model number	Additional information
Real-time analysis, basic detection	N9041RT1B	Includes frequency mask trigger (FMT), time qualified trigger (TQT); minimum 17.17 $\mu$ s signal duration for 100% probability of intercept (POI) with full amplitude accuracy; requires N9041B-H1G (255 MHz max real-time BW)
Real-time analysis, optimum detection	N9041RT2B	Includes FMT, TQT triggers; minimum 3.517 $\mu$ s signal duration for 100% probability of intercept (POI) with full amplitude accuracy; requires N9041B-H1G (255 MHz max real-time BW)
Frequency mask trigger, basic detection	N90EMFT1B	Enables frequency mask triggering with N9067C pulse application and 89600 VSA software to detect signals as short as 15 $\mu$ s duration; included in N9041RT1B (Option RT1); requires N9041B-H1G.
Frequency mask trigger, optimum detection	N90EMFT2B	Enables frequency mask triggering with N9067C pulse application and 89600 VSA software to detect signals as short as 3.6 $\mu$ s duration; included in N9041RT2B (Option RT2); requires N9041B-H1G.

**Step 7. Add optional features including security**

Description	Option number	Additional information
Enhanced display package	Standard	Includes spectrogram, trace zoom, and zone span in SA mode; licensed as N90E1EDPB
Basic EMI precompliance	N90EMEMCB	Perform EMI precompliance measurements with CISPR 16-1-1 detectors and bandwidths: tune and listen, and measure at marker are also available. Currently only qualified for Input 1.
Fast power up to 255 MHz bandwidth	N90EMFP2B	Accelerates the power measurements such as ACPR; requires Option B40 or H1G
Resolution bandwidth extended	N90EMRBEB	Extends the maximum RBW in Zero Span; requires Option H1G
External digitizer control	N9041B-EDC	Provides integrated control of an external IF digitizer (oscilloscope) up to 8 GHz bandwidth above 50 GHz input frequency within the IQ Analyzer or 89600 VSA (2018 Update 1.0 and later); requires N9041B-CRW; Currently only qualified for Input 2.
Additional removable solid-state drive (SSD)	N9041B-SS1	Provides a fully-imaged, removable SSD (160 GB) in addition to the one installed in instruments, with Windows 10 operating system
Security features, exclude launch programs	N9041B-SF1	Prevents the launching of Windows programs from the instrument application
Security features, prohibit saving results	N9041B-SF2	Prevents instrument application from saving/recall of measurement results or user configurations to/from instrument's data storage

**Step 8. Add rear panel output utilities**

Description	Option number	Additional information
Second IF output	Standard	Wideband IF out; center frequency depends on IF path; output on Aux IF connector at rear panel; licensed as N9041B-CR3
Ultra-wide bandwidth IF output	N9041B-CRW	Provides up to 5 GHz IF BW, for start frequency above 50 GHz
Arbitrary IF out	N9041B-CRP	IF out 10 to 75 MHz (in 500 kHz steps); output on Aux IF connector at rear panel
Aux log video out	N9041B-ALV	Fast rise time video out; output on Aux IF connector
Y-axis video out	N9041B-YAV	Screen video (0-1 volt open circuit); log video and linear video
Real time data link	Standard	The LVDS connector allows UXA connect to X-COM data recorder for data streaming (up to 40 MHz BW), and to the N5106A PXB baseband generator and channel emulator; licensed as N9041B-RTL

## Step 9. Choose measurement application or software and license type

Note: Keysight offers 4 license types for the measurement applications and instrument features, in 2 license terms: Perpetual or Time-based.

License types:

- **Node-locked:** Allows you to use the license on one instrument/computer at a time
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool
- **Floating:** Allows you to access the license on the networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased
- **USB Portable:** Allows you to access the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately

License terms:

- **Perpetual:** License can be used in perpetuity. For perpetual license holders, a separate support contract is required to access Keysight technical support and software updates
- **Time-based:** License is time limited to a defined period, such as 12-months. A valid support contract is included in the pricing for time-based licenses.

For detailed information, we strongly recommend you visit the X-Series measurement application collection page: [www.keysight.com/find/xseriesapps](http://www.keysight.com/find/xseriesapps)

Description	Model number	Additional information
<b>General purpose</b>		
Spectrum analyzer	Standard	Traditional spectrum analysis plus many new and enhanced functions; power measurements based on industry specifications; licensed as N9060EM1E
Analog demodulation	N9063EM0E	Adds one-button measurement for AM/FM/PM demodulation with metrics, tune and listen, and AF spectrum; supports audio output (output voltage proportional to frequency deviation). FM Stereo and RDS are included. Currently only qualified for Input 1.
Phase noise	N9068EM0E	Adds one-button measurements for analyzing phase noise in frequency domain (log plot) and time domain (spot frequency), supports external mixing
Noise figure	N9069EM0E (requires preamplifier)	Adds one-button measurements for noise figure, gain, and related metrics; requires preamplifier to meet specifications; works with Keysight U1831C USB noise source, N400xA Series smart noise sources and 346 Series noise sources; supports U7227 USB external preamplifiers Includes the advanced NF measurement features including external LO control over GPIB/LAN/USB, multi-stage converter tests with system LO, and manual mode to simulate the legacy NF meter. Currently only qualified for Input 1.
Vector modulation analysis Digital Demodulation	N9054EM0E	Performs one-button flexible modulation analysis measurements with FSK, PSK, QAM, MSK, ASK, APSK, VSB etc. and popular format preset
Vector modulation analysis Custom OFDM	N9054EM1E	Performs one-button custom OFDM modulation analysis measurement with user-defined settings or recalling 89600 VSA or Signal Studio output files
Pulse analysis	N9067EM0E	Characterize pulsed RF signals in the time domain, with phase, frequency and statistical analysis of large pulse sets; enables fixed and variable length gated acquisition for capturing pulses of varying pulse width and PRI (requires 4 GB capture memory Option DP4); Currently only qualified for Input 1.
EMI	N6141EM0E	Performs pre-compliance conducted and radiated emission measurements. Currently only qualified for Input 1.
Remote language compatibility	N9061EM0E	Adds capability to emulate HP/Agilent 8566/68 and 856xE/EC spectrum analyzers. Currently only qualified for Input 1.
SCPI command language compatibility	N9062EM0E	Adds capability to emulate the R&S FSP/FSU/FSE/FSL/FSV spectrum analyzers or ESU EMI receiver. Currently only qualified for Input 1.
MATLAB software	N6171A	

**Step 9. Choose measurement application or software and license type, continued**

Description	Model number	Additional information
<b>Cellular communications (currently only qualified for Input 1)</b>		
GSM/EDGE/Evo	N9071EMOE	Standard-based, one-button GSM/EDGE/EDGE Evolution measurements
W-CDMA/HSPA+	N9073EMOE	Standard-based, one-button W-CDMA, HSPA and HSPA+ measurements
LTE/LTE-Advanced FDD	N9080EMOE	Standard-based, one-button LTE/LTE-Advanced FDD measurements
NB-IoT & eMTC FDD	N9080EM3E	Standard-based, one-button NB-IoT/eMTC measurements
LTE V2X	N9080EM4E	Standard-based, one-button LTE-V2X transmitter measurements
LTE/LTE-Advanced TDD	N9082EMOE	Standard-based, one-button LTE/LTE-Advanced TDD measurements
Multi-standard radio	N9083EMOE	Standard -based, one-button MSR measurements on any combination of LTE-FDD, W-CDMA/HSPA/HSPA+, and GSM/EDGE/EDGE Evo signals
5G NR (New Radio)	N9085EMOE (requires Option H1G)	Standard-based, one-button 5G NR (New Radio) downlink and uplink measurements
<b>Wireless connectivity (currently only qualified for Input 1)</b>		
WLAN 802.11a/b/g/j/p/n/af/ah	N9077EMOE	Standard-based, one-button 802.11a/b/g/j/p/n/af/ah measurement
WLAN 802.11ac/ax	N9077EM1E	Standard-based, one-button 802.11ac/ax measurement
Bluetooth®	N9081EMOE	Standard-based, one-button <i>Bluetooth</i> (BR/EDR, Low Energy 4.0/4.2 and <i>Bluetooth</i> 5) measurements
Short Range Comm and IoT	N9084EMOE	Standard-based, one-button LoRa CSS measurement, 802.15.4 for ZigBee measurement and G.9959 for Z-Wave measurement

**Step 10. Choose 89600 VSA software licenses**

Description	Model number	Additional information
Basic vector signal analysis and hardware connectivity	89601200C (required core option)	<ul style="list-style-type: none"> <li>Provides the tools and user interface that make up the 89600 VSA software including time and frequency domain measurement, hardware connectivity, recordings and playback</li> <li>Channel quality modulation analysis</li> </ul>
<b>General purpose</b>		
Digital demodulation analysis	89601AYAC	<ul style="list-style-type: none"> <li>Analysis of &gt;40 modulation formats, including custom APSK and presets for communication formats like GSM/EDGE, ZigBee FSK, <i>Bluetooth</i>® BR, APC025 and SOQPSK</li> <li>Proprietary and pre-standard, customized IQ constellation signals</li> <li>TEDS modulation analysis</li> <li>Channel response measurements such as phase/magnitude response and multi-tone group delay</li> </ul>
Custom OFDM modulation analysis	89601BHFC	<ul style="list-style-type: none"> <li>Proprietary and pre-standard OFDM formats</li> </ul>
<b>Cellular communication</b>		
5G NR modulation analysis	89601BHNC	<ul style="list-style-type: none"> <li>5G NR modulation analysis</li> <li>Pre-5G modulation analysis</li> </ul>
LTE/LTE-A FDD modulation analysis	89601BHGC	<ul style="list-style-type: none"> <li>LTE FDD modulation analysis</li> <li>LTE-Advanced FDD modulation analysis</li> </ul>
LTE/LTE-A TDD modulation analysis	89601BHHC	<ul style="list-style-type: none"> <li>LTE TDD modulation analysis</li> <li>LTE-Advanced TDD modulation analysis</li> </ul>
3G modulation analysis bundle	89601B7NC	<ul style="list-style-type: none"> <li>W-CDMA/HSPA+ modulation analysis</li> <li>TD-SCDMA/HSPA modulation analysis</li> <li>cdma2000 modulation analysis</li> <li>1xEV-DO and 1xEV-DV modulation analysis</li> </ul>
<b>Wireless connectivity</b>		
Wireless connectivity modulation analysis	89601B7RC	<ul style="list-style-type: none"> <li>WLAN 802.11a/b/g/j/p modulation analysis</li> <li>WiMax modulation analysis</li> </ul>
High throughput WLAN modulation analysis	89601BHXC	<ul style="list-style-type: none"> <li>WLAN 802.11n/ac modulation analysis</li> <li>WLAN 802.11ax modulation analysis</li> </ul>
IoT modulation analysis	89601BHTC	<ul style="list-style-type: none"> <li>NB-IoT modulation analysis</li> <li>RFID modulation analysis</li> </ul>
<b>Radar analysis</b>		
Pulse analysis	89601BHQc	<ul style="list-style-type: none"> <li>Pulsed modulated radar signal analysis</li> </ul>
FMCW radar analysis	89601BHPC	<ul style="list-style-type: none"> <li>For multi-chirp linear FM modulated signals or automotive radar</li> </ul>
<b>Other standard formats</b>		
DOCSIS modulation analysis	89601BHMC	<ul style="list-style-type: none"> <li>DOCSIS3.1 downstream and upstream modulation analysis</li> </ul>
Multi-vendor hardware connectivity	89601301C	<ul style="list-style-type: none"> <li>Connect multi-vendor hardware for modulation analysis</li> </ul>



**Step 11. Choose accessories**

Description	Option number	Additional information
User guide	Standard	US – English localization All user documentation is included in the embedded context-sensitive help system inside the UXA User documentation can be downloaded from: <a href="http://www.keysight.com/find/uxa_manuals">www.keysight.com/find/uxa_manuals</a>
Front-panel protective cover	Standard	
Rear-panel protective cover	Standard	
Power cord	Standard	Country specific
Connector kit Connector kit includes: 1.0 mm (f) to 1.0 mm (f) test port adapter 1.0 mm (f) to 1.85 mm (f) test port adapter Adapter 2.4 mm (f) to 2.4 mm (f) Adapter 2.4 mm (f) to 2.92 mm (f) Torque wrench Connector vise	Standard	Provides mechanical protections to the input connectors  For Input 2 connector For Input 2 connector For Input 1 connector For Input 1 connector For Input 2; 14 mm jaws (4 inch-lb/10 inch-lb) For Input 2 connector (when customer supplied 1 mm adapters are used (not used for Keysight rugged addapters))
Documentation DVD	N9060EM1E-ABA	US – English localization
Mouse, USB interface	1MSE001A	Enhances usability of the VSA software
USB DVD-ROM/CD-R/RW drive	1DVR001A	Enhances the usability of the Windows operating system
Rack mount kit	N9041B-2CM	Adds rack mount flanges and rails to the UXA
Rack mount kit with handles	N9041B-2CP	Adds rack mount flanges, rails and handles to the UXA
Minimum loss pad, 50 to 75 $\Omega$ (type-N to BNC)	MLP001A	<ul style="list-style-type: none"> <li>– 50 <math>\Omega</math> type-N male to 75 <math>\Omega</math> BNC female adapter</li> <li>– Frequency range: 9 MHz to 2 GHz</li> <li>– Input/output return loss: 20/11 dB</li> <li>– Insertion loss: 5.7 dB</li> </ul>
Narrow IF bandwidth waveguide harmonic mixer		Capable of analyzing signals with bandwidth up to 300 MHz
50 to 75 GHz (standard V-band)	M1970V-001	USB mixer with smart “plug-and-play” features
50 to 80 GHz (extended V-band)	M1970V-002	USB mixer with smart “plug-and-play” features
60 to 90 GHz (standard E-band)	M1970E	USB mixer with smart “plug-and-play” features
75 to 110 GHz (standard W-band)	M1970W	USB mixer with smart “plug-and-play” features
Wide IF bandwidth waveguide harmonic mixer		Capable of analyzing signals with wider bandwidth up to 3 GHz
60 to 90 GHz (standard E-band)	M1971E-001	USB mixer with smart features and 3 signal paths
55 to 90 GHz (extended E-band)	M1971E-003	USB mixer with smart features and 3 signal paths
50 to 75 GHz (standard V-band)	M1971V	USB mixer with smart features and 3 signal paths
75 to 110 GHz (standard W-band)	M1971W	USB mixer with smart features and 3 signal paths
26 to 40 GHz (A-band) waveguide harmonic mixer	11970A	Requires N9029AE13 diplexer
33 to 50 GHz (Q-band) waveguide harmonic mixer	11970Q	Requires N9029AE13 diplexer
40 to 60 GHz (U-band) waveguide harmonic mixer	11970U	Requires N9029AE13 diplexer
50 to 75 GHz (V-band) waveguide harmonic mixer	11970V	Requires N9029AE13 diplexer
75 to 110 GHz (W-band) waveguide harmonic mixer	11970W	Requires N9029AE13 diplexer
LO/IF diplexer	N9029AE13	Ordering convenience; required for 11970 Series external mixers
90 to 140 GHz OML harmonic mixer	N9029AE08	Ordering convenience for OML mixer
110 to 170 GHz OML harmonic mixer	N9029AE06	Ordering convenience for OML mixer
140 to 220 GHz OML harmonic mixer	N9029AE05	Ordering convenience for OML mixer
220 to 350 GHz OML harmonic mixer	N9029AE03	Ordering convenience for OML mixer
50 to 75 GHz VDI frequency extender	N9029AV15	Signal analyzer frequency extension module from VDI
60 to 90 GHz VDI frequency extender	N9029AV12	Signal analyzer frequency extension module from VDI
75 to 110 GHz VDI frequency extender	N9029AV10	Signal analyzer frequency extension module from VDI



**Step 11. Choose accessories (continued)**

Description	Option number	Additional information
90 to 140 GHz VDI frequency extender	N9029AV08	Signal analyzer frequency extension module from VDI
110 to 170 GHz VDI frequency extender	N9029AV06	Signal analyzer frequency extension module from VDI
140 to 220 GHz VDI frequency extender	N9029AV05	Signal analyzer frequency extension module from VDI
220 to 330 GHz VDI frequency extender	N9029AV03	Signal analyzer frequency extension module from VDI
325 to 500 GHz VDI frequency extender	N9029AV02	Signal analyzer frequency extension module from VDI
500 to 750 GHz VDI frequency extender	N9029AV1B	Signal analyzer frequency extension module from VDI
750 to 1100 GHz VDI frequency extender	N9029AV01	Signal analyzer frequency extension module from VDI
USB external preamplifier, 10 MHz to 4 GHz	U7227A	External preamplifier with smart “plug-and-play” features
USB external preamplifier, 0.1 to 26.5 GHz	U7227C	External preamplifier with smart “plug-and-play” features
USB external preamplifier, 2 to 50 GHz	U7227F	External preamplifier with smart “plug-and-play” features
USB thermocouple power sensor, DC to 120 GHz	U8489A	USB power sensor with 1.0 mm (m) connector for signal power level verification

**Step 12. Add a calibration plan**

Description	Option number	Additional information
Commercial calibration certificate with test data	N9040B-UK6	Calibration certificate only available at time of instrument purchase; only provides measurement results
Calibration Assurance Plan, Return-to-Keysight, 3 years	R-50C-011-3	Keysight tests your instrument against its original specifications and automatically makes adjustments if outside of specified parameters; pre- and post-adjustment measurement data reports also provided
Calibration Assurance Plan, Return-to-Keysight, 5 years	R-50C-011-5	
Calibration Assurance Plan, Return-to-Keysight, 7 years	R-50C-011-7	
Calibration Assurance Plan, Return-to-Keysight, 10 years	R-50C-011-10	

For more information on the USB smart harmonic external mixers, go to [www.keysight.com/find/smartmixer](http://www.keysight.com/find/smartmixer)

For more information on the USB external preamplifiers, go to [www.keysight.com/find/usb-preamp](http://www.keysight.com/find/usb-preamp)

Other calibration options may be available; for more information on calibration go to:

[www.keysight.com/find/calibration](http://www.keysight.com/find/calibration)

For more information on training and application support services go to:

[www.keysight.com/find/training](http://www.keysight.com/find/training)

## Instrument Upgrades

Fast license-key upgrades for options that do not require additional hardware:

1. Place an order for the upgrade with Keysight and request to receive the option upgrade entitlement certificate and a one-time software upgrade license through email
2. Redeem the certificate through the Web by following the instructions on the certificate
3. Install the license file and latest software in the UXA
4. Begin using the new capability <sup>1,2</sup>

Installation, calibration, and verification information is available at:

[www.keysight.com/find/uxa\\_upgrades](http://www.keysight.com/find/uxa_upgrades)

Upgrades to wider analysis bandwidths (> 40 MHz) require hardware and license key. Instruments are required to be shipped back to the Keysight factory for upgrade and calibrations.

A web-based calculator at the following URL assists you in finding what upgrade options for analysis bandwidth you need: [www.keysight.com/find/BW-selector](http://www.keysight.com/find/BW-selector)

1. At the time of manufacture, the hardware related to many of these options was fully adjusted and the option performance was verified to be within its warranted specifications. Within one year of the initial calibration date of the analyzer, this option is fully calibrated with no further adjustment or verification testing.
2. If this analyzer has been adjusted as part of a repair or calibration during its first year, or if the analyzer is more than one year old, additional adjustment and performance verification tests are required to ensure that some newly installed options are functioning properly. However, the completion of these tests does not guarantee that the analyzer meets all warranted specifications.

### You Can Upgrade!

Options can be added after your initial purchase.

Most X-Series options are license-key upgradeable.



Description	Upgrade number	Requirements (UXA must already include the following)	Additional information
Increase frequency from 90 to 110 GHz	N9041BU-F22	590	Includes additional hardware, return to Keysight factory
Increase analysis bandwidth from 10 or 25 MHz to 40 MHz	N9041BU-B40	None	License key only
Increase analysis bandwidth from 25 or 40 MHz to 1 GHz	N9041BU-H1G	None	Includes additional hardware, return to Keysight factory; full bypass path (FBP) is included
Add full bypass path	N9041BU-FBP	H1G	Return to Keysight factory
Real-time analysis, basic detection (255 MHz max real-time BW)	N9041BU-RT1	H1G	License key only; includes FMT, TQT; minimum 17.17 $\mu$ s signal duration for 100% POI with full amplitude accuracy. Also orderable at N9041RT1B (requires F/W revision A.21.04 onward)
Real-time analysis, optimum detection (255 MHz max real-time BW)	N9041BU-RT2	H1G	License key only; includes FMT, TQT; minimum 3.517 $\mu$ s signal duration for 100% POI with full amplitude accuracy. Also orderable at N9041RT1B (requires F/W revision A.21.04 onward)
Frequency mask trigger, basic detection	N9041BU-FT1	H1G	License key only. Also orderable at N90EMFT1B (requires F/W revision A.21.04 onward)
Frequency mask trigger, optimum detection	N9041BU-FT2	H1G	License key only. Also orderable at N90EMFT2B (requires F/W revision A.21.04 onward)
Add electronic attenuator to 3.6 GHz	N9041BU-EA3	None	License key only; 1-dB steps, 0 to 24 dB range
Add preamplifier, 50 GHz	N9041BU-P50	None	License key only
Add ultra-wide bandwidth IF output	N9041BU-CRW	None	Provides up to 5 GHz IF BW for start frequency above 50 GHz; license key only
Add auxiliary log video out	N9041BU-ALV	None	License key only
Add arbitrary IF output	N9041BU-CRP	None	License key only
Add Y-axis video output	N9041BU-YAV	None	License key only
Add fast power up to 255 MHz bandwidth	N9041BU-FP2	B40 or H1G	License key only; for fast power measurements such as ACPR. Also orderable at N90EMFP2B (requires F/W revision A.21.04 onward)
Add precompliance EMI features	N9041BU-EMC	None	License key only (Currently only qualified for Input 1). Also orderable at N90EMEMCB (requires F/W revision A.21.04 onward)
Add external digitizer control	N9041BU-EDC	CRW	License key only; provides integrated control of an external IF digitizer (oscilloscope) up to 8 GHz bandwidth above 50 GHz input frequency within the IQ Analyzer or 89600 VSA (2018 Update 1.0 and later); requires N9041B-CRW; Currently only qualified for Input 2.
Add resolution bandwidth extended	N9041BU-RBE	H1G	License key only. Also orderable at N90EMRBEB (requires F/W revision A.21.04 onward)
Add security features, exclude launch programs	N9041BU-SF1	None	License key only; prevents the launching of Windows programs from the instrument application
Add security features, prohibit saving results	N9041BU-SF2	None	Saving/recall of measurement results or user configurations to/from instrument's data storage
USB DVD-ROM/CD-R/RW drive	1DVR001A	None	
65-key USB keyboard	1KBD001A	None	
USB mouse	1MSE001A	None	
Minimum loss pad, 50 to 75 $\Omega$ (type-N to BNC)	MLP001A	None	50 $\Omega$ type-N male to 75 $\Omega$ BNC female adapter; frequency range: 9 MHz to 2 GHz; input/output return loss: 20/11 dB; insertion loss: 5.7 dB; includes additional hardware
Additional removable solid-state drive (SSD)	N9041BU-SS1	None	Spare SSD (160 GB) for security environment or for a backup, with Windows 10 operating system

Description	Upgrade number	Requirements (UXA must already include the following)	Additional information
Additional removable SSD with massive volume	N9094AKS8D	None	Provides a fully-imaged, removable solid state drive with 800 GB or greater data storage and Windows 10 operating system
Rack mount kit	N9041BU-2CM	None	Rack mount flanges and rails to the UXA
Rack mount kit with handles	N9041BU-2CP	None	Rack mount flanges, rails and handles to the UXA
Upgrade operating system to Windows 10	N9041BU-SS1	PC6, W7X	Provides a removable solid-state drive with Windows 10 operating system
Upgrade to quad-core, high-performance processor, 16 GB RAM, with flash calibration file memory	N9041BU-PCS	PC6	Upgrade to quad-core, high-performance processor, 16 GB RAM, with flash calibration file memory and removable solid-state drive

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

