

Product Categories

Related Applications



Mobile and Network Test Solutions

Related Technical Articles

What is EMC and What equipment do you need if you want to do EMC test?

CISPR15 Three Loop Antenna Function Introduction

Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

Related Successful Case

Denmark – Installation and training for Goniophotometer, Integrating Sphere System and EMI test equipment




Three Loop Antenna
Product No: VVLA-30M

Get a Quote

Form with fields: Name*, Company*, Email*, Cell/WhatsApp, Message*

Send

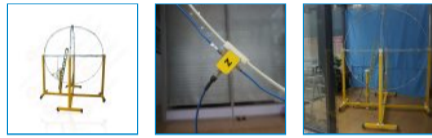

Description

Download

The three loop antenna VVLA-30M is a standard measurement antenna according to CISPR15-2018/GB17743-2007, EN55015 standard <Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment>. It can work with LISUN EMI-9KA / EMI- 9KB EMI Receiver System for EUT magnetic field radiation measurement between X, Y and Z planes. The antenna measurement is with high accuracy.

Characteristics:

- The VVLA-30M already includes the calibration device;
• Frequency range: 9KHz ~30MHz; It can switch between X, Y and Z planes;
• The sensor coefficient of current probe is 0dB; Impedance: 50Ω/BNC;
• Ring diameter: 2m; No need to move EUT or loop during measurement process;
• The antenna has been calibrated in the factory by placing calibration dipole antenna in the center of the antenna; users can also use it for recalibration.

Related Products



EMI-9KA EMI Test System



SDR-2000B Magnetic Shielding Cabinet for EMI Testing

