


# ONE REVOLUTION PRECISION DIAL INDICATORS


lifting lever (optional)



- Eliminate the possibility of reading errors due to miscounting
- Shockproof
- Jeweled bearing
- Free stroke: 4.5mm
- With limit pointers
- Optional accessory: backs (page 129~130), contact points (page 126~128), lifting lever (code **6289-150**)



**2885-008**

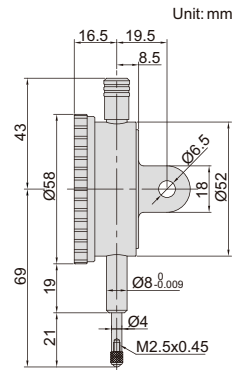

Code	Range	Graduation	Accuracy	Hysteresis	Dial reading	Remark
<b>2885-008 *</b>	0.08mm	0.001mm	3µm	1.5µm	40-0-40	lug back
<b>2885-008F *</b>	0.08mm	0.001mm	3µm	1.5µm	40-0-40	flat back

\* Supplied with manufacturer inspection certificate traceable to NIST USA