


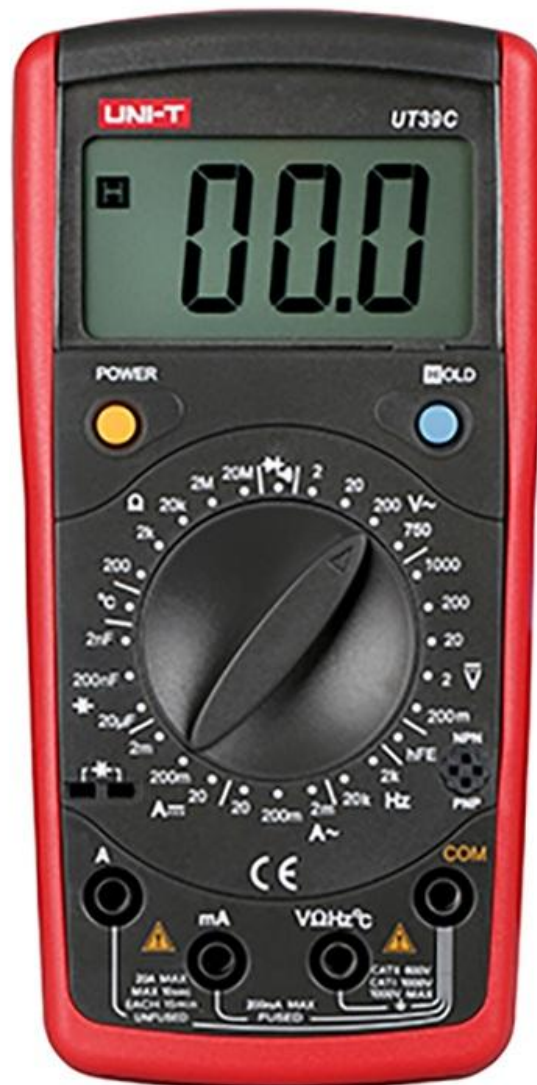

UT39C Handheld Digital Multimeter

Handheld Digital Multimeter

Specifications	Range	Best Accuracy
Model		UT39C
DC voltage	200mV/2V/20V/200V/1000V	$\pm(0.5\%+1)$
AC voltage	2V/20V/200V/750V	$\pm(0.8\%+3)$
DC current	2mA/200mA/20A	$\pm(0.8\%+1)$
AC current	2mA/200mA/20A	$\pm(1\%+3)$
Resistance	200 Ω /2k Ω /20k Ω /2M Ω /20M Ω	$\pm(0.8\%+1)$
Capacitance	2nF/200nF/20uF	$\pm(4\%+3)$
Temperature	-40~1000°C	$\pm(3\%+10)$
Frequency	2kHz~20kHz	$\pm(1.5\%+5)$
Features		
Max display		1999
Manual range		√
Diode test		√
Buzzer continuity		√
Transistor		√
Data hold		√
Auto power off		√
Low battery indication		√
Input protection		√
Input imepdance for DCV	Around 10M Ω	√
General Characteristics		
Power	9V NEDA 1604/6F22/006P	
Standard accessories	Test leads, battery, rubber case, English manual, point contact temperature, probe	
Product size	172×83×38mm	
Product weight	310g (battery included)	