

Keysight U4301B

PCI Express® 3.0 Analyzer Module

Data Sheet

- PCIe® 3.1 support with L1 substate analysis
- Separate reference clock with SSC (SRIS) support
- Probing solution for all popular interfaces
 - CEM slot through x1 through x16
 - U.2 (SFF-8639) single and dual link
 - M.2 mini PCIe connection
- Detailed LTSSM equalization analysis
- NVMe protocol analysis
- AHCI protocol analysis



Introduction

The Keysight Technologies, Inc. high speed U4301B PCI Express 3.0 analyzer module is a protocol analyzer supporting all PCI Express® applications from Gen1 through Gen3, at speeds, including 2.5 GT/s (Gen1) and 5.0 GT/s (Gen2) through PCIe 8 GT/s (Gen3), and with link widths from x1 to x16. The U4301B analyzer captures and decodes PCI Express data and displays it in a packet viewer window.

The U4301B analyzer is a blade that installs into an AXIe two-slot M9502A or five-slot M9505A.

Probing is provided by the U4321A solid-slot interposer probe, U4324A flying lead solder down probe, or the U4322A mid-bus probe based on Keysight's equalization snoop probe (ESP) technology.

Gain insight into the equalization process and all of the state transitions with views that can be customized to meet your requirements. The analyzer's LTSSM overview can pinpoint specific training sequence issues through easy-to-interpret analysis results.

Keysight's transactional decoder includes a transactional viewer that allows the designer to select transactional queues and performance information from the analyzer's NVMe transaction overview pane. This organizes the transactions by direction or by queue to follow the data flow across the interface, with one-click control. Individual PRP (Physical Region Page) lists contain all of the key information of the NVMe queues, allowing designers to quickly review and validate the data flows over the PCIe connections.

The performance analysis package includes the real data throughput calculations, with response-time measurement of the PCIe data flow. It allows designers to measure and understand throughput performance, PCIe response times, and other operational measurements that provide the insight needed to optimize device performance.

Complementary PCIe stimulus and response testing of the PCIe system is accomplished with the addition of the U4305B PCIe Gen3 exerciser.

Keysight solutions for PCIe Gen1 to Gen3 analysis and emulation

- PCIe Gen1 (2.5 GT/s), Gen2 (5 GT/s), and Gen3 (8 GT/s) support
- Auto link configuration for up to x16 link width (auto speed, auto link width, auto link reversal, auto polarity)
- LTSSM analysis with equalization reporting
- Power state analysis includes L1 substate operation
- Flow control credit and performance analysis
- PCIe, NVMe, AHCI, and configuration space decoding and analysis
- Compact AXIe modular system configuration

Overview (Continued)



Analysis and debug



- Supports Gen1 through Gen3, x1 through x16 link width
- 8 GB of capture buffer per module
- Non-intrusive probing that leverages ESP technology

Industry leading probes




- Mid-bus probe supports x1 to x16 unidirectional, or x1 to x8 bidirectional
- Solid slot interposer supports x1 to x16 unidirectional or bidirectional
- Flying lead solder down probe supports x1 and x2 bidirectional capability on a single probe. Other standard lane width configuration support is x4, x8, and x16
- M.2 interposer supports testing of M/B-M PCIe solid state drives (SSDs)
- SFF-8639 interposers can be used with solid state drives (SSDs) with either single or dual link support

Stimulus and test U4305B exerciser



- Support for Gen1 through Gen3 and link widths of x1 through x16
- Link testing from x1 through x16 using automated LTSSM exerciser
- PCIe, MR-IOV, and SR-IOV stimulus response testing
- NVMe root complex emulation for test and verification of NVMe devices
- Protocol test card (PTC) to measure PCIe Gen3 DUT port and system BIOS specification compliance as defined by the PCI-SIG® standards

System Architecture Overview

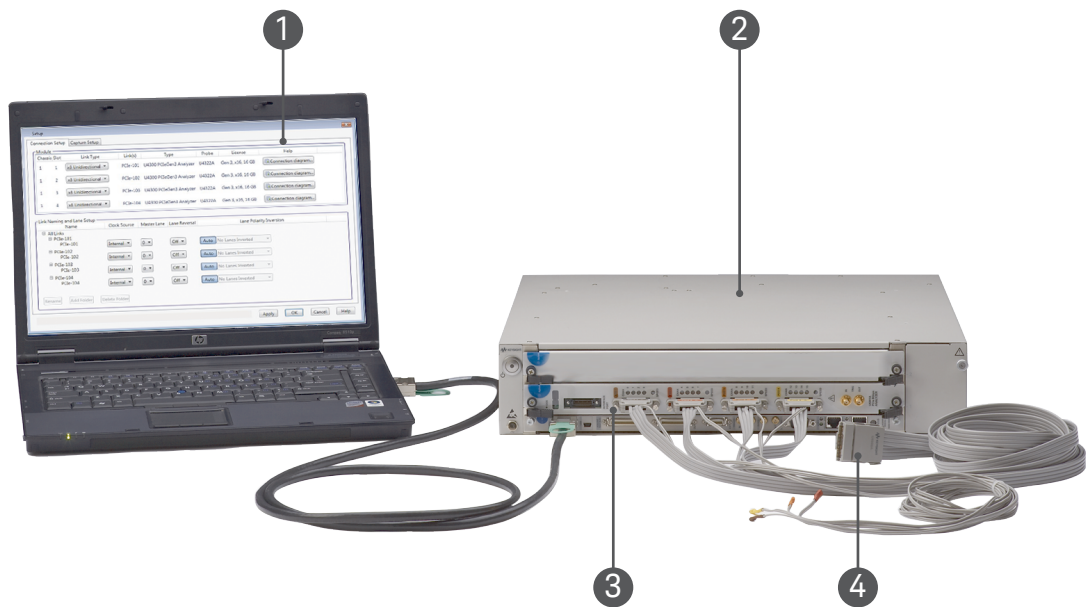

1. PC controller to manage and interact with the system
2. 2-slot modular chassis
3. U4301B protocol analyzer module controlled via M9536A embedded controller or by PCIe link to external PC
4. U4322A soft touch mid-bus probe 3.0


Configuration	
Step 1	– Order the U4301B analyzer module. Standard configuration is x1 linkwidth, 5 Gbps, 8 GB capture buffer – Upgrade linkwidth to x4, x8, or x16 – Upgrade to 8 GT/s
Step 2	– Order a modular chassis – Recommended chassis is the Keysight M9502A 2-slot AXIe chassis or optionally the Keysight M9505A 5-slot AXIe chassis
Step 3	– Select a PC controller—Keysight recommends the M9536A embedded controller—or select an external PC that meets the performance requirements specified in <i>PXI and AXIe Modular Instrumentation, Tested Computer List - Technical Note</i> (http://literature.cdn.keysight.com/litweb/pdf/5990-7632EN.pdf)
Step 4	Order the probe for your measurement application – U4321A solid-slot interposer 3.0: Order the option for the number of lanes to be tested – U4322A mid-bus probe based on Keysight soft touch technology – U4324A flying lead solder down probe: Order the option for the number of lanes to be tested – U4328A M.2 interposer socket 3 (M-key) – U4330A U.2 (SFF-8639) interposer for single or dual link
Step 5	Add the exerciser for stimulus/response testing – U4305 exerciser: Order the option for the number of lanes to be tested and software licenses for applications such as end node or root complex emulation, LTSSM, SR/MR-IOV, or NVMe emulation

Note: The slot interposer and exerciser lane width is fixed and is not upgradable due to the connector size being a function of lane width. A smaller lane width probe can be used in a wider lane application, but only those lower lanes will be tested. Keysight does not recommend or support the use of lane converters.

Product Features and Benefits Overview

Decoding and analyzing PCIe traffic

Displaying the captured data from the 8 GB capture buffers is provided by several different views, which enable you to see exactly the data that is required. The Packets window decodes each captured packet and enables you to quickly and easily find, filter, and decode the PCIe information of interest. This easy-to-use view allows you to define the parameters of interest and display the details of each packet.

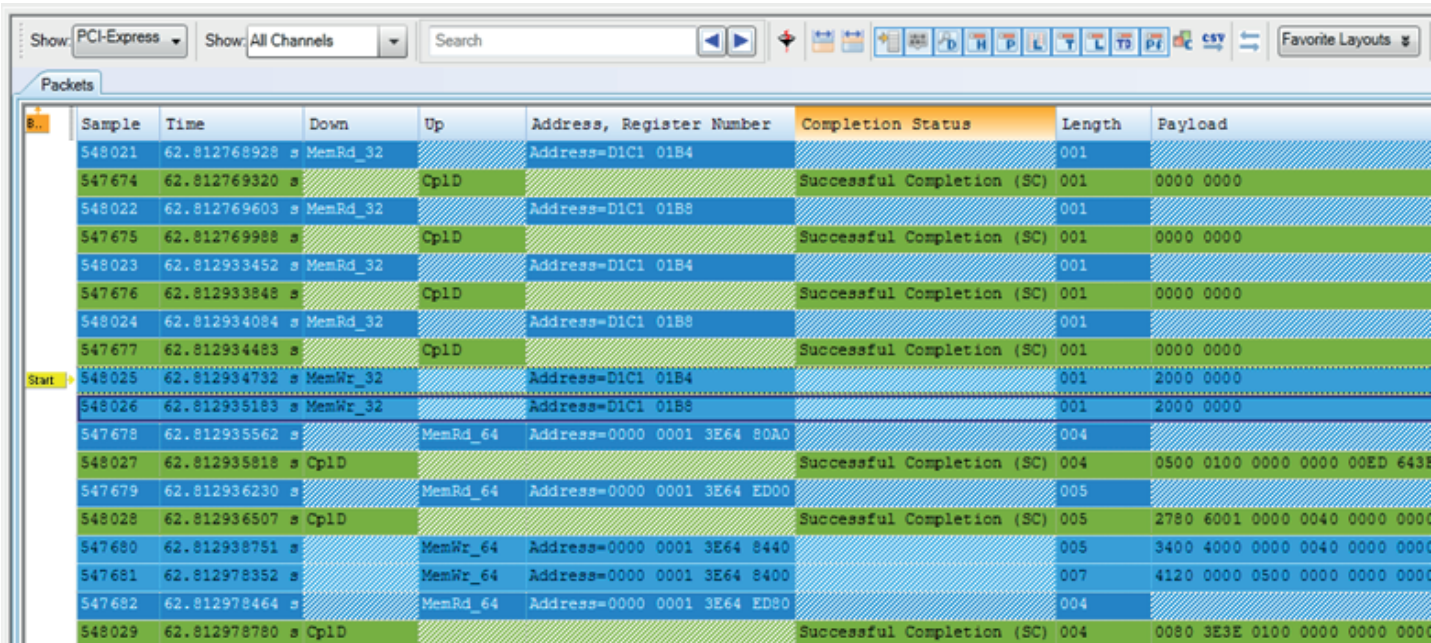

Sample	Time	Down	Up	Address, Register Number	Completion Status	Length	Payload
548021	62.812768928	MemRd_32		Address=D1C1 01B4		001	
547674	62.812769320		CplD		Successful Completion (SC)	001	0000 0000
548022	62.812769603	MemRd_32		Address=D1C1 01B8		001	
547675	62.812769988		CplD		Successful Completion (SC)	001	0000 0000
548023	62.812933452	MemRd_32		Address=D1C1 01B4		001	
547676	62.812933848		CplD		Successful Completion (SC)	001	0000 0000
548024	62.812934084	MemRd_32		Address=D1C1 01B8		001	
547677	62.812934483		CplD		Successful Completion (SC)	001	0000 0000
548025	62.812934732	MemWr_32		Address=D1C1 01B4		001	2000 0000
548026	62.812935183	MemWr_32		Address=D1C1 01B8		001	2000 0000
547678	62.812935562		MemRd_64	Address=0000 0001 3E64 80A0		004	
548027	62.812935818	CplD			Successful Completion (SC)	004	0500 0100 0000 0000 00ED 643F
547679	62.812936230		MemRd_64	Address=0000 0001 3E64 ED00		005	
548028	62.812936507	CplD			Successful Completion (SC)	005	2780 6001 0000 0040 0000 0000
547680	62.812938751		MemWr_64	Address=0000 0001 3E64 8440		005	3400 4000 0000 0040 0000 0000
547681	62.812978352		MemWr_64	Address=0000 0001 3E64 8400		007	4120 0000 0500 0000 0000 0000
547682	62.812978464		MemRd_64	Address=0000 0001 3E64 ED80		004	
548029	62.812978780	CplD			Successful Completion (SC)	004	0080 3E3E 0100 0000 0000 0000

Figure 1. This spreadsheet view gives you quick and easy access to your favorite views of PCIe packets.

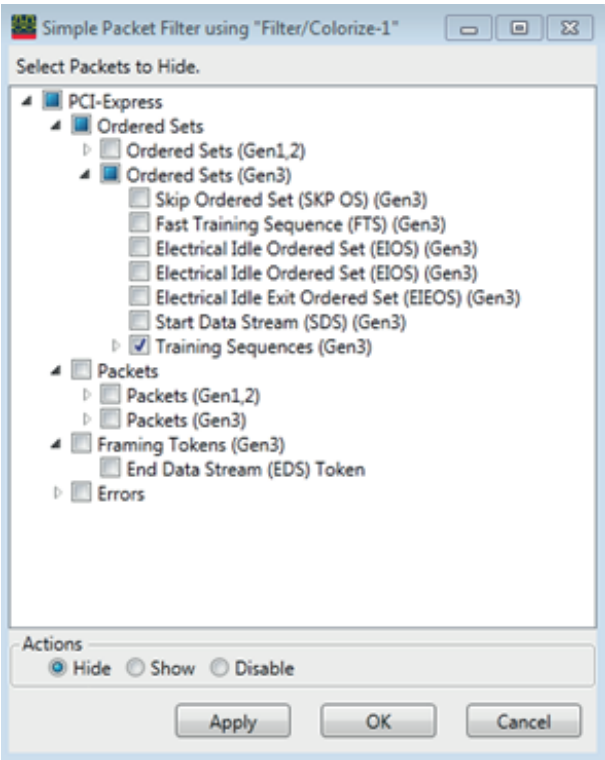


Figure 2. Simple Packet Filter can be used to filter data that has been captured to hide things like training sequences.

Product Features and Benefits Overview (Continued)

Decoding and analyzing PCIe traffic (Continued)

Additional displays make it easy to quickly understand the data in the buffer. Any errors are highlighted in red and tool tips provide details of the error detected.

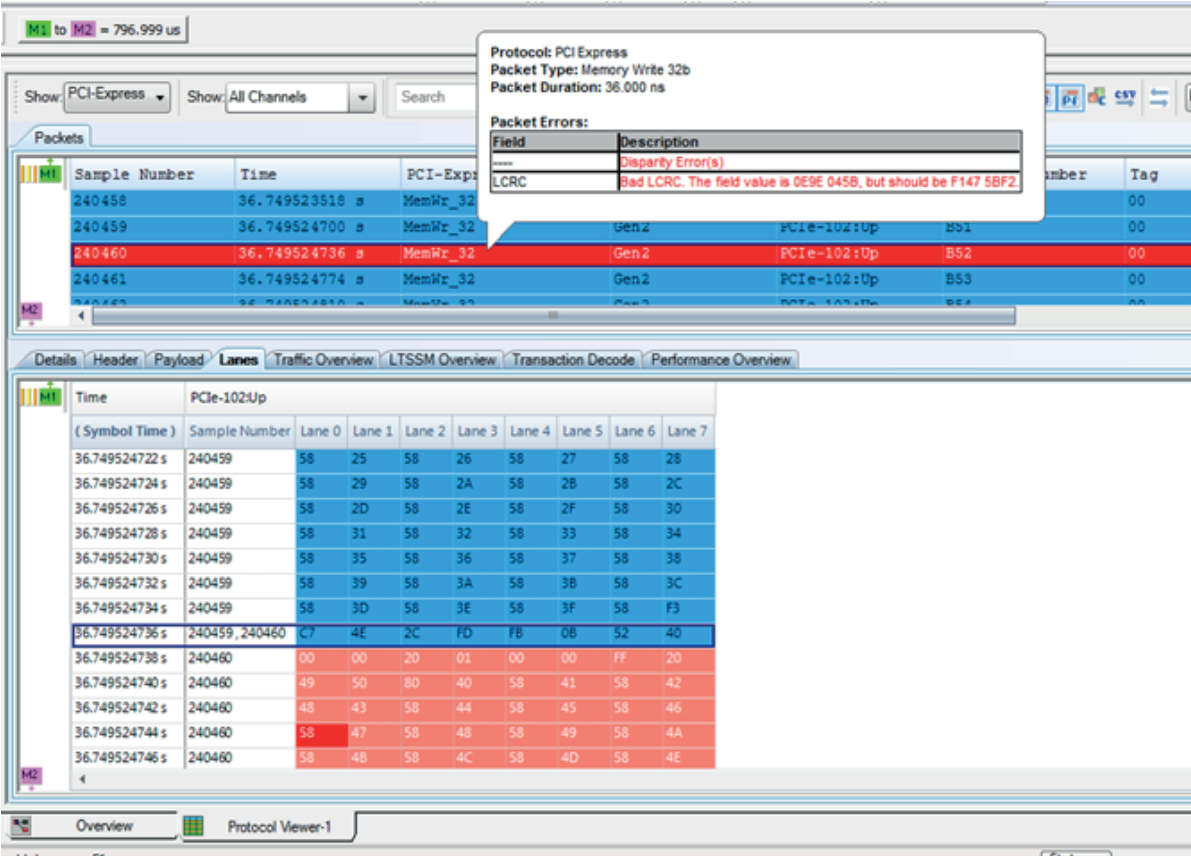


Figure 3. The analyzer highlights the exact lane and byte that contain the corrupt bits that caused the LCRC error in the above memory read packet.

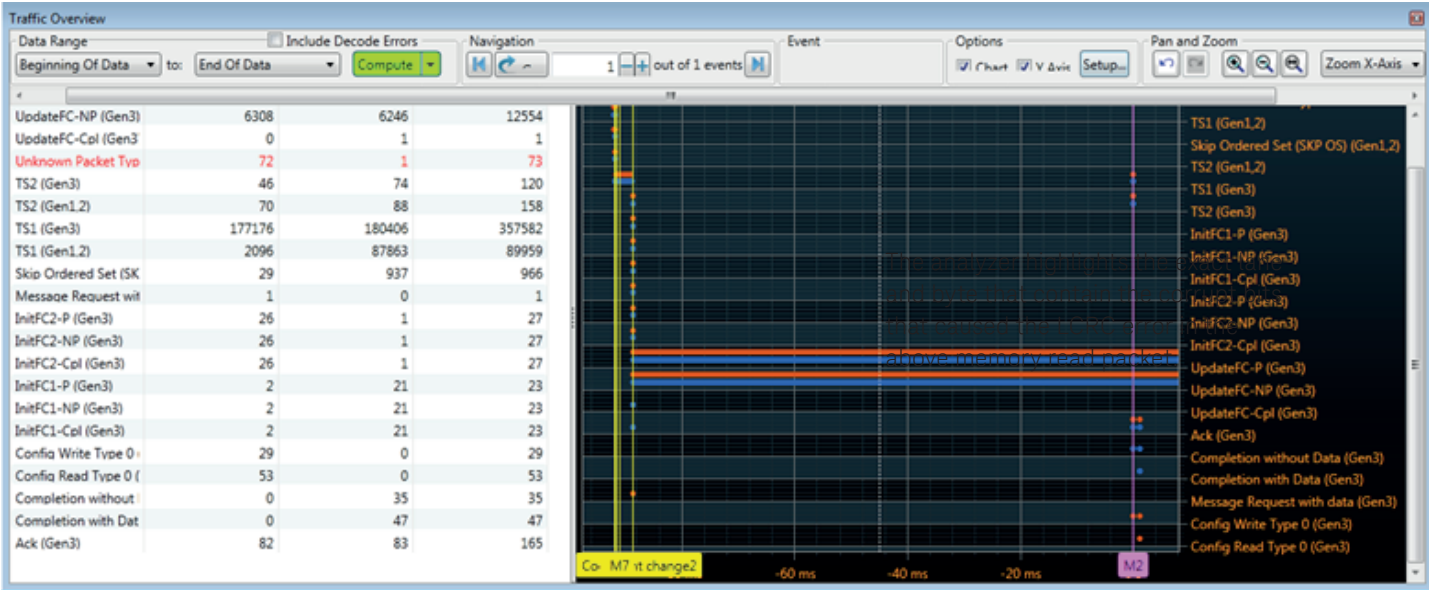


Figure 4. The Traffic Overview shows all of the packets in the capture buffer in a time scale display. Instantly access to any packet by clicking on the graph.

Product Features and Benefits Overview (Continued)

Powerful PCIe triggers

The U4301B provides a powerful yet easy-to-use trigger system. Simply select the packet(s) using the drag and drop interface. A double click on the packet takes you into a bit level packet definition of the trigger.

Advanced triggers provide a state-based trigger event that can be tied to packets, timers, external triggers, or Link state. This enables the capture of those hard to define events that are not defined by a single event packet.

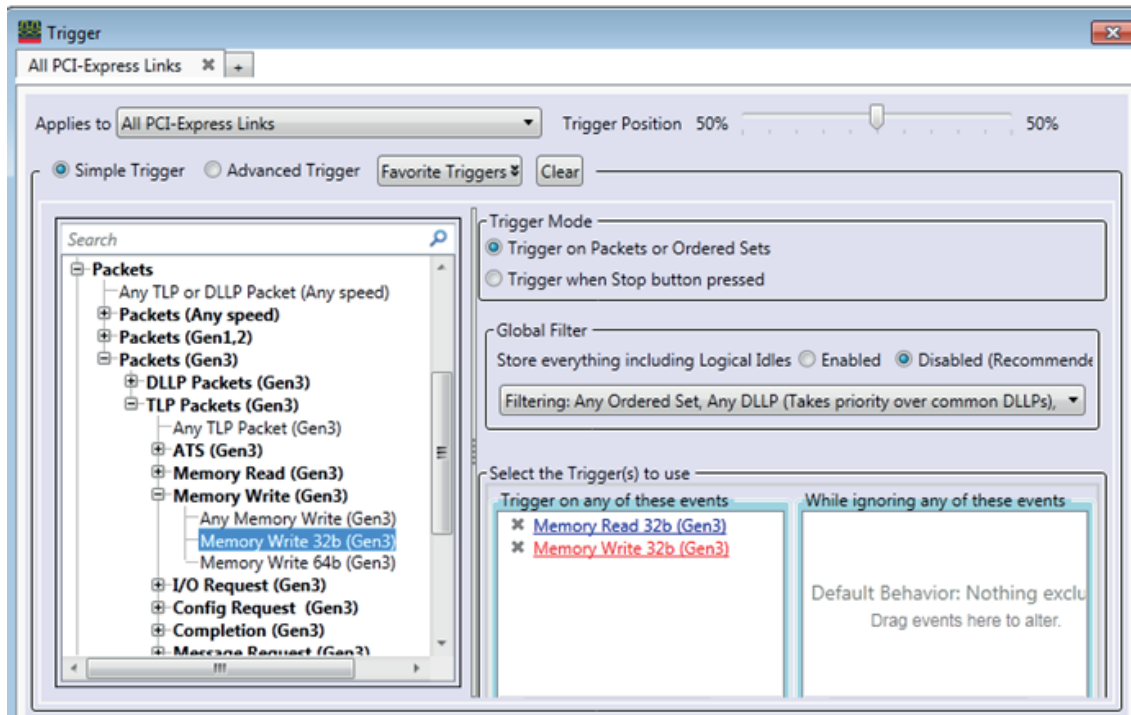


Figure 5. Trigger on Memory Read or Memory Write packet and center the capture buffer around either of these packets.

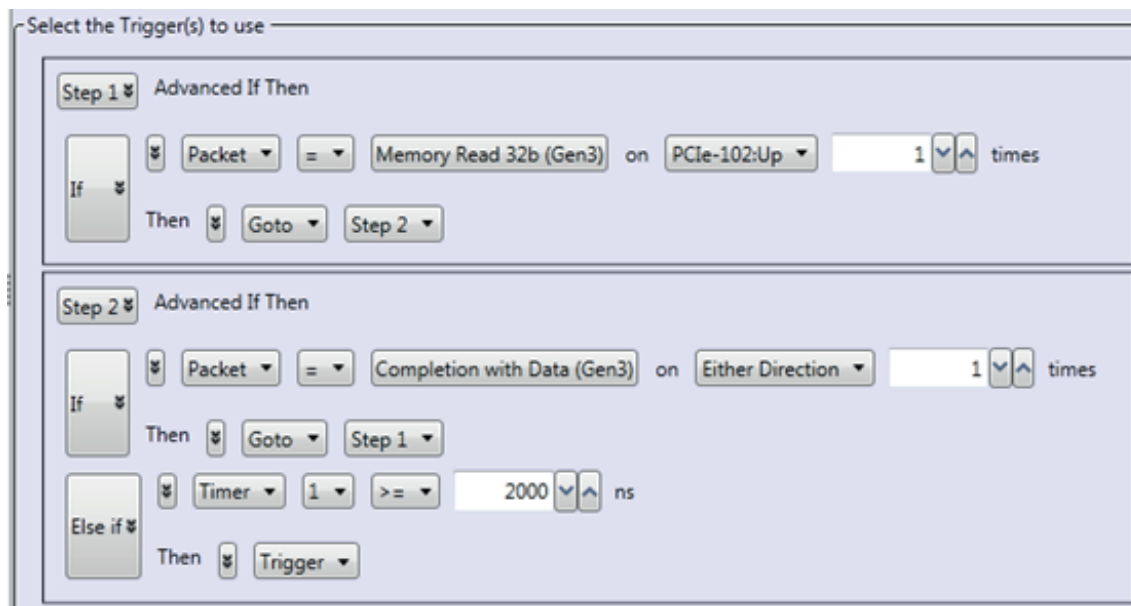


Figure 6. Advanced state-based trigger captures the timeout of a completion packet that takes longer than 2 μ s.

Product Features and Benefits Overview (Continued)

NVMe data

Transaction decode

The Transaction Decode tab in the Protocol Viewer window allows you to compute and view transactions decoded from the captured PCIe traffic. The decoding and display of transactions is done as per the relevant storage protocol specifications, such as NVMe, to help you easily correlate the decoded data to the protocol specifications and evaluate the DUT's compliance to these specifications. Transaction decoding of NVMe data includes analysis of the trace to identify all of the relevant transactions types and presents a transaction overview table that enables quick and easy navigation of key packet types.

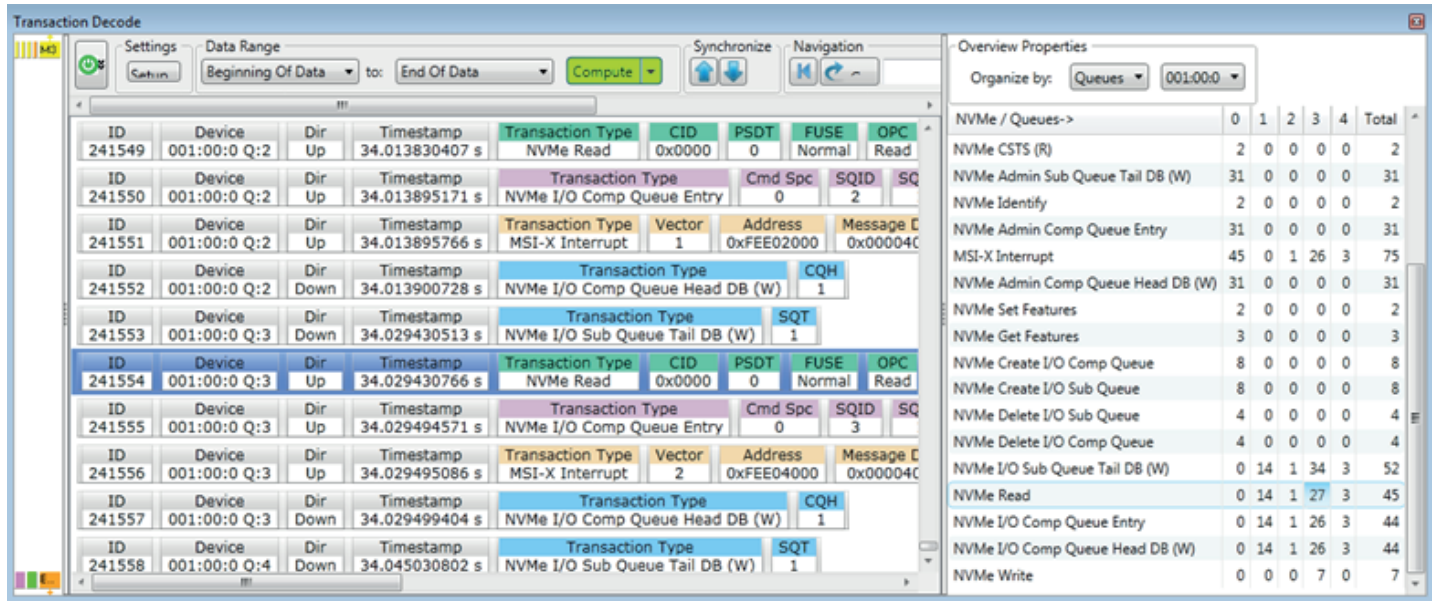


Figure 7. NVMe transaction information provides easy to understand displays of NVMe payloads and PRP messages. The transaction overview of all transactions enables instant access to all messages in the captured trace.

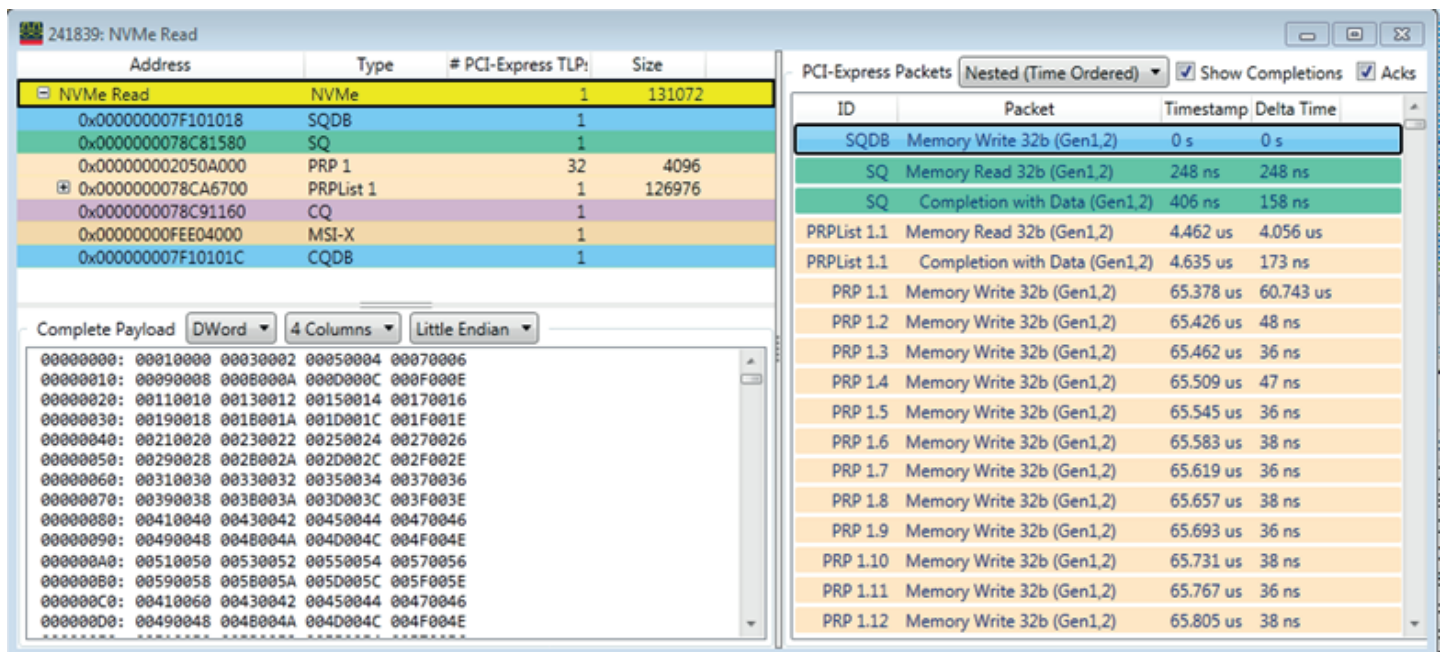


Figure 8. The NVMe Read screen lets you visualize a decoded NVMe transaction as a super transaction with all its related transactions forming a complete set.

Product Features and Benefits Overview (Continued)

AHCI data

The AHCI (advanced host controller interface) and the associated SATA (serial ATA) commands for storage devices are displayed on the Transaction Decode window. By capturing the setup information, the configuration is automatic, and the parts of a command are joined together to display the complete operation.

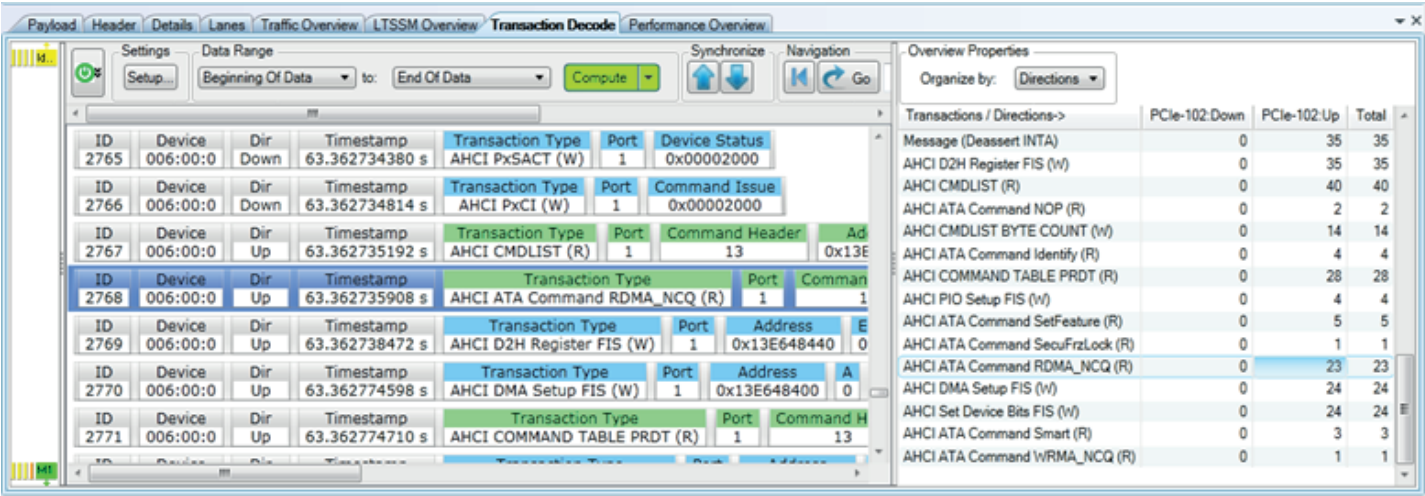


Figure 9. The decoded transactions are a mix of PCIe Config, generic host control, port-specific, and SATA commands transactions.

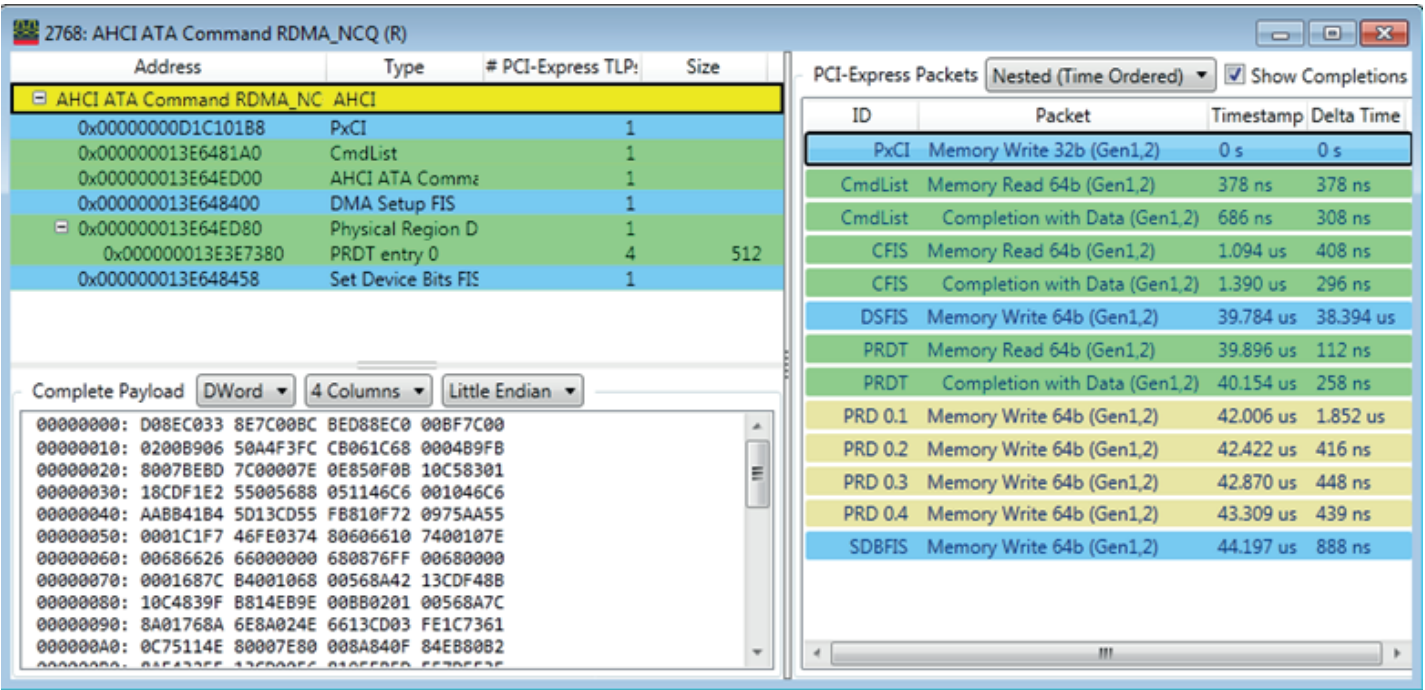


Figure 10. An AHCI transaction shows in the Transaction Decode tab as a super transaction, allowing its complete set of related transactions to be viewed.

Product Features and Benefits Overview (Continued)

LTSSM

Effective presentation of protocol interactions from physical layer to transaction layer features:

- LTSSM Overview with full state transaction traffic captured at the PHY layer logic sub block
- Industry standard spreadsheet format protocol viewer with:
 - Highlighting by packet type or direction
 - Easy flow columns to better understand the stimulus and response nature of the protocols
 - Context-sensitive columns to show only the relevant information, minimizing the need to scroll horizontally
- Flexible GUI configuration to meet debug needs, with pre-defined GUI layouts for link training debug, config accesses and general I/O

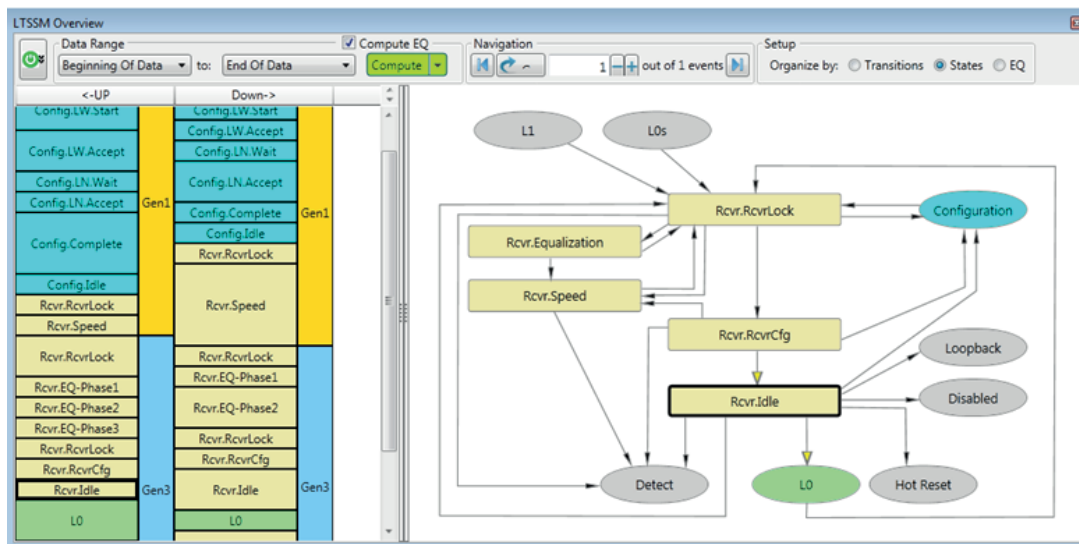


Figure 11. LTSSM diagrams show the state transitions and training flow of the link. Deep dive into the trace with packet synchronization.

Equalization (EQ) analysis

Analyzing the equalization process requires the review of thousands of packets. To understand the process that the link goes through to finalize on a selected set of transmit coefficients, the U4301B summarizes the key parameters and steps. Each lane is processed separately and the EQ analysis makes it easy to see any values as they are modified.

[illegible]

Figure 12. Quickly identify the changing equalization settings for each lane, with the values highlighted in blue.

Product Features and Benefits Overview (Continued)

LTSSM L1 substate analysis

PCIe version 3.1 has added new LTSSM states for extremely low power states called L1 substates, which enable PCIe to reduce the power consumption to just a few microwatts. Validating this power consumption and performance of a PCIe device has never been easier. The U4301B protocol analyzer can capture the CLKREQ# signal that is used to control the operation of L1 substate operation, and provide the information needed to accurately verify the link state.

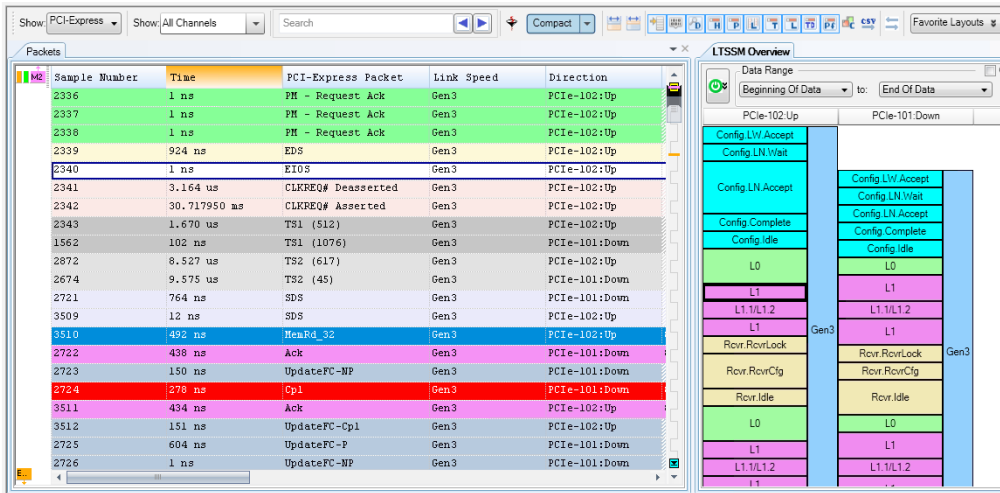


Figure 13. State analysis is synchronized with the packet trace to provide clear timing information for all the critical events.

Analyzing the device power consumption

Only Keysight can synchronize and display the information from an oscilloscope with the PCIe packets to give the insight needed to understand the state of the device and the power usage in all phases of operation. Simple network connections allow the protocol analyzer to control the Keysight oscilloscope and download the synchronized data onto a single display for your analysis needs.

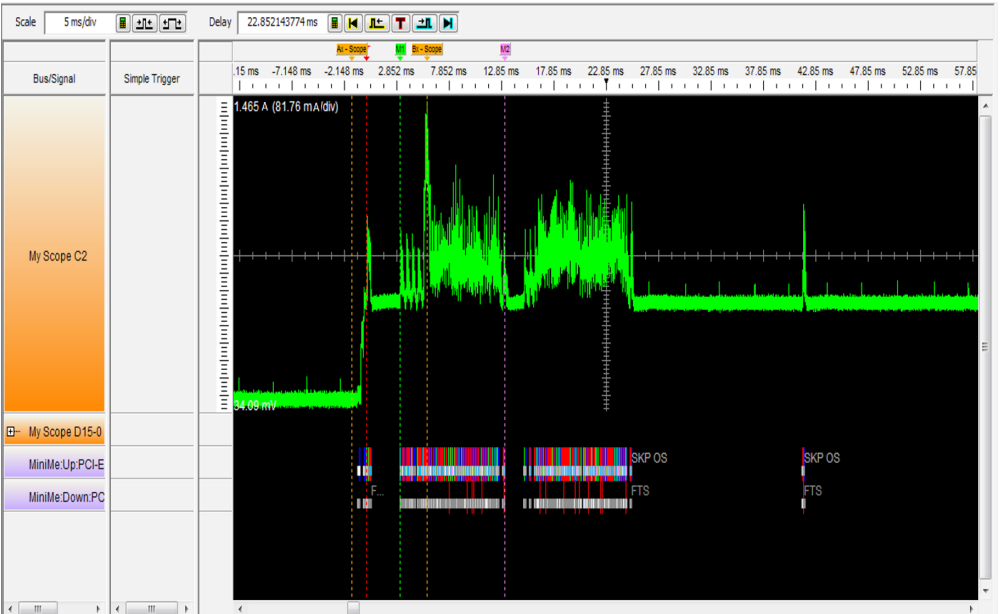


Figure 14. The data from the oscilloscope is display on the same time scale to show the exact voltage, current, and power consumption of the device.

Product Features and Benefits Overview (Continued)

Performance analysis

Visualize the performance of your PCIe traffic with the built-in statistics provided by the Performance Overview of the U4301B. Over 50 parameters are automatically calculated and with simple checkbox selection all of the performance information is displayed in a time correlated graphical overlay view. The statistical performance of the link latency, utilization, and Flow Control credits, is shown with events such as Interrupts and errors.



Figure 15. The statistical performance of the link latency, utilization, and Flow Control credits, is shown with events such as Interrupts and errors.

Flow control analysis

Flow control computes and displays the available flow control credits from the data trace that has a bidirectional traffic. Flow control credit level is determined by the Writes and Completions in one direction and the UpdateFC packets in the other direction.

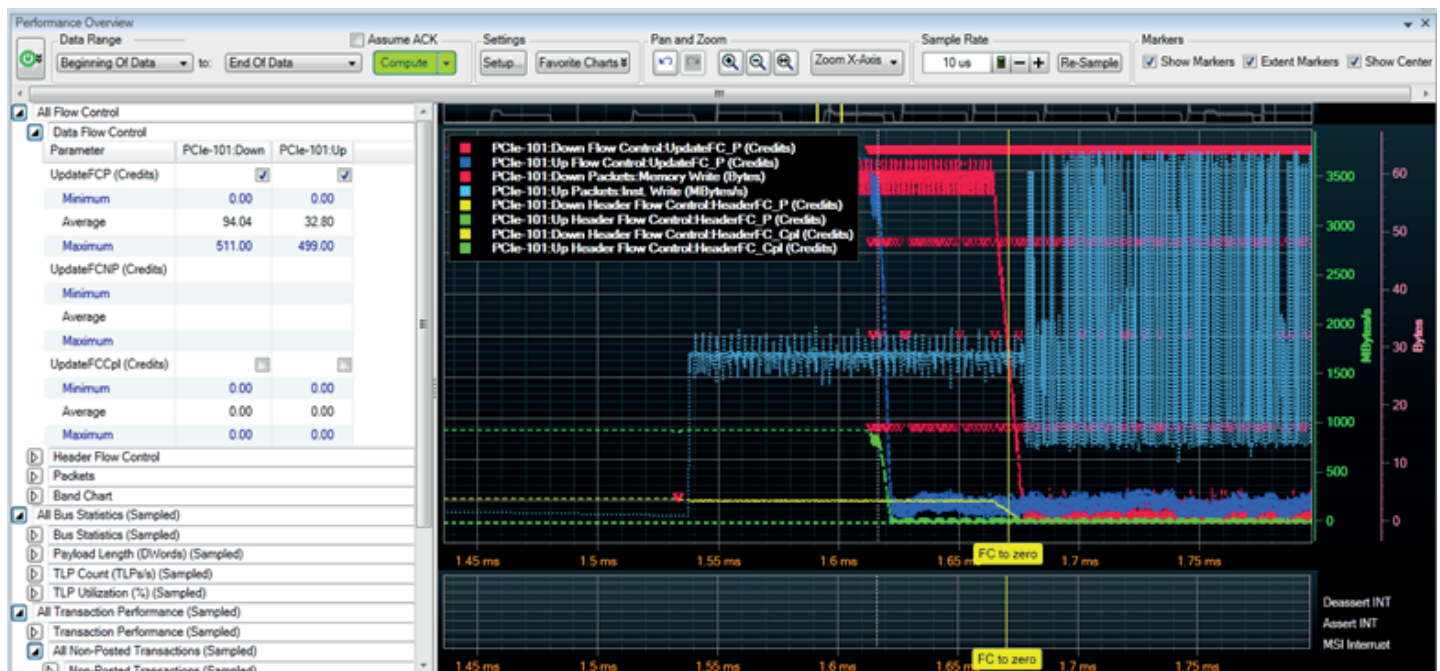


Figure 16. Easily identify credit exhaustion with flow control analysis for data and header flow control analysis.

Product Features and Benefits Overview (Continued)

Powerful hardware features ensure capture of important transition events

- Large capture buffer, for long recording sessions with 8 GB per module (x1 to x8 bidirectional) and 16 GB for x16 bidirectional
- LEDs to show lane status and speed for quick understanding of current link status



U4301B analyzer module characteristics and specifications

- Environmental specifications as per the main frame except maximum operating temperature = 40 °C
- Trigger input: Input Z = 50 ohms, $V_{max} = 3.3\text{ V}$
- Trigger output: 2.0 V
- Minimum trigger duration: 20 ns

Host PC requirements

Select a PC controller—Keysight recommends the M9536A embedded controller—or select an external PC that meets the following performance requirements. Keysight has pre-tested a number of external PCs as listed in *PXI and AXIe Modular Instrumentation, Tested Computer List - Technical Note* (<http://literature.cdn.keysight.com/litweb/pdf/5990-7632EN.pdf>).

- Processor speed: 1 GHz, 64-bit (x64), 2 GB minimum available memory running Windows 7 or Windows 8 (64-bit)
- Available hard disc space: 1.5 GB
- Support for DirectX 9 graphics with 128 MB graphics memory recommended, (Super VGA graphics is supported)
- Microsoft Internet Explorer 7 or higher
- Compatible with a PCIe Gen1 x4 interface module


Product Features and Benefits Overview (Continued)

Probing

Accurate data recovery with consistent representation of the signal

U4321A slot interposer

- ESP (equalizing snoop probe) technology ensures accurate data recovery in all Gen3 platforms and all link widths of x1 through x16
- High fidelity signal capture ensures design problems can be reproduced
- Mechanical stabilization for the device under test's (DUT's) end point and ensuring firm PCIe slot connections

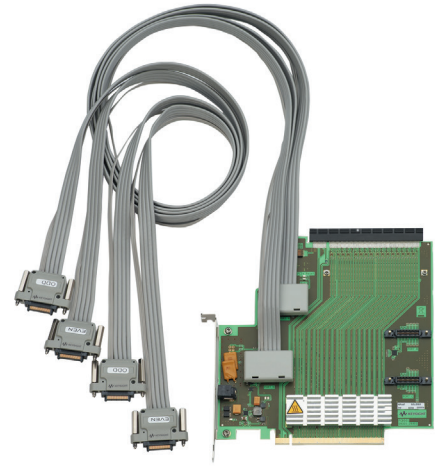


Characteristics

- Power: 12 VDC, 1.25 A max
- Power supply: Keysight part number 0950-5160
- Input: 100 to 250 VAC, 50 to 60 Hz

Accurate data recovery with flexible use model

U4322A mid-bus probe

- Provides signal capture in situations where no PCIe connector is available
- Micro spring-pin probe based on Keysight's soft touch technology provides reliable contact to signal pads
- Independent reference clock per four lanes for maximum layout flexibility

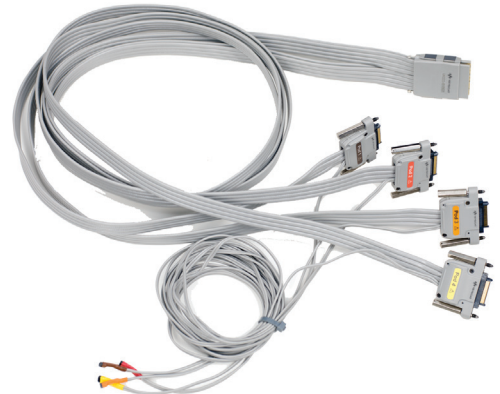

Characteristics

- Input: 25V max or 3 Vrms into 250 ohms
- Temperature: Operating 0 to 40 °C
- Storage: -40 to 70 °C
- Humidity: 15 to 95% non-condensing
- Altitude: 3,000 m (10,000 ft)

Accurate data recovery with full channel mapping support and flexible probe points

U4324A flying lead solder down probe

- Provides signal capture in situations where no PCIe slot connector or PCIe standard mid-bus footprint is available.
- Low channel count per probe to reduce unnecessary expense for unused channel leads
- Independent reference clock tap for maximum layout flexibility
- Low cost, easily replaceable N5426A zero insertion force (ZIF) tips to maximize probe use life (includes one set of ten N5426A)




Characteristics

- Input: 10 V max common mode
- Capacitive loading: 0.250 fF
- Temperature: Operating +5 to +40 °C
- Storage: -40 to 70 °C
- Humidity: Operating 80% RH at 40 °C
- Storage: 90% RH at 65 °C
- Vibration: 2.09 Grms (5 to 500 Hz random)
- Shock: 1.6 m/s [63 in/s] (2 mS half sine)

Product Features and Benefits Overview (Continued)

N5426A ZIF tip kit

- The ZIF tip is a connection accessory used to connect the U4324A flying lead cable to the channel on the DUT
- One side of the ZIF tip connects to the flying lead and the other end is soldered to the DUT
- The ZIF tip is calibrated to the U4324A flying lead; no impedance changes should take place to the ZIF tip
- 10 ZIF tips per kit

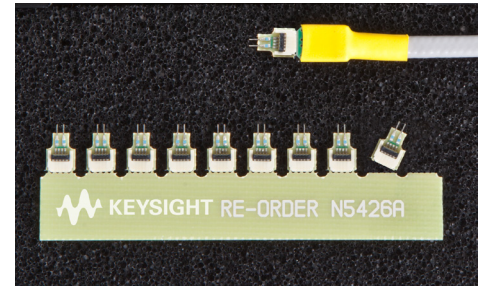

Characteristics

- Input: 10 V max common mode
- Capacitive loading: 0.250 fF
- Temperature: Operating +5 to +40 °C
- Storage: –40 to 70 °C
- Humidity: Operating 80% RH at 40 °C
- Storage: 90% RH at 65 °C
- Vibration: 2.09 Grms (5 to 500 Hz random)
- Shock: 1.6 m/s [63 in/s] (2 mS half sine)

U4328A PCIe M.2 socket 3 interposer (M-key)

Enables probing of storage solutions based on the M.2 interconnection standard. The U4328A is perfectly designed to connect between a PCIe solid state drive (SSD) and the host that uses the M.2 connection with support for M/B-M PCIe x1, x2, and x4 memory modules (socket 3). The U4328A M.2 interposer enables monitoring of x1, x2, or x4 PCIe communication links.

The U4328A comes in a kit that supports all standard M.2 sizes from 2230 through 22110.

U4328A characteristics	
Input impedance and capacitance	Differential input R: 250 Ω to ground per side Differential input C: 0.33 pF
Scope probe connections supplied	CLREQ#, PERST#, PEWAKE#
Power probe resistor value	50 m Ω (for use with Keysight N2820A high-sensitivity current probe)
Adapter height	12.8 mm
Cable length	1 meter (39.4 inches)
Supplied adapters	2230, 2242, 2260, 2280, and 22110
Temperature	Operating: +5 to +40 °C; storage: –40 to +70 °C
Humidity	Operating: 50 to 80% at 40 °C (non-condensing)



Product Features and Benefits Overview (Continued)

U4330A U.2 (SFF-8639) PCIe interposer (supports single or dual link)

Test single- or dual-port U.2 connections with the U4330A interposer. The U.2 interposer is a PCIe storage interposer that makes it possible to analyze data traffic from PCIe SSD storage devices to PCIe storage systems using the U.2 connector.


Note: Analyzing U.2 dual-link traffic simultaneously requires two U4301B PCIe analyzer modules.



U4330A characteristics	
Input impedance and capacitance	Differential input R: 250 Ω to ground per side Differential input C: 0.33 pF
Scope probe connections supplied	CLREQ#, PERST#, PEWAKE#
Power probe resistor value	50 m Ω (for use with Keysight N2820A high-sensitivity current probe)
Adapter height	9.8 mm
Cable length	760 mm (29.9 inches)
Temperature	Operating: +5 to +40 °C; storage: -40 to +70 °C
Humidity	Operating: 50 to 80% at 40 °C (non-condensing)

Thorough link testing with the U4305B PCIe exerciser

- Addition of the U4305B provides PCIe, MR-IOV, and SR-IOV stimulus response testing
- Pre-defined LTSSM sequences simplify state transition testing
- Pre-defined protocol test card (PTC) test cases applied to Lane 0 only, provide specification compliance feedback
- Full speed testing of Gen 1 through Gen 3 systems
- All lane widths supported at full speed
- End point emulation and act as a down stream component (DSC)
- Root complex emulation and act as an upstream component (USC)
- NVMe end point or system testing with compliance test package
- Full API programming and scripting tools

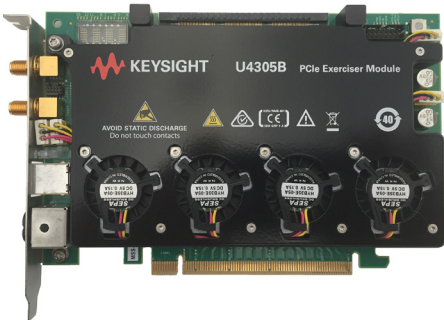

Specifications

Refer to the U4305B data sheet, publication number 5990-8458EN for detailed characteristics and specifications.

Related Keysight Literature

Publication title	Publication number
Hardware and Probing for PCI Express Gen3 User's Guide	U4301-97000
U4301B PCIe 3.0 Analyzer User Guide	U4301-97001
U4305B Protocol Exerciser for PCI Express® 3.0 - Data Sheet	5992-0553EN

Ordering Information

U4301B PCIe Gen3 analyzer base configuration, 5 GT/s, x1 linkwidth, 8 Gb capture buffer. Includes: LTSSM, AHCI, NVMe, and performance analysis

A specific configuration is required to determine the lane width to be tested.

Model number	Description
U4301B-A04	U4301B-A04 upgrade link width to x4
U4301B-A08	U4301B-A08 upgrade link width to x8
U4301B-A16	U4301B-A16 upgrade link width to x16 Note: Analyzing bi-directional x16 requires the purchase of two U4301B modules with U4301B-A16
U4301B-AN3	Upgrade speed to PCIe Gen3, 8 GT/s

Modular chassis and computer interface

The recommended chassis is the 2-slot AXIe configuration.

Chassis type	Model number	PC configuration	Interface	Cable
AXIe (recommended)	M9502A 2-slot AXIe	Laptop	M9045B	Y1200B
		Desktop	M9048A	Y1202A

Probe selection

Probe type	Model number	Description
Solid slot interposer 8 Gbps Note: The U4321A interposer probe lane width is fixed and is not upgradable to accommodate different lane widths due to the fact that the connector size is a function of lane width. Keysight does not recommend or support the use of lane converters.	U4321A-A01	Link width x1
	U4321A-A04	Link width x4
	U4321A-A08	Link width x8
	U4321A-A16	Link width x16
Mid-bus probe	U4322A	Mid-bus probe based on Keysight soft touch technology for applications where no standard PCIe connector is available for testing
	U4329A	Set of 5 retention modules
	U4317A	Gen3 to Gen2 mid-bus adaptor
Flying lead probe	U4324A	4 channel/probe, includes qty 1 N5426A
	N5426A	ZIF tip kit (10 pcs)
M.2 interposer socket 3 (M-key)	U4328A	x4 Gen3 passive interposer
SFF-8639 interposer PCIe Gen3	U4330A	Supports single x4 link or dual x2 links (requires 2 analyzer modules)

Analyzer upgrades

Model number	Description
U4301BU-AFP	Analyzer software license upgrade x1 to x4
U4301BU-BFP	Analyzer software license upgrade x1 to x8
U4301BU-CFP	Analyzer software license upgrade x1 to x16
U4301BU-DFP	Analyzer software license upgrade x4 to x8
U4301BU-EFP	Analyzer software license upgrade x4 to x16
U4301BU-FFP	Analyzer software license upgrade x8 to x16

U4305B PCIe Gen3 Exerciser

Refer to the U4305B data sheet pub number 5992-0553EN for detailed characteristics and specifications and ordering instructions.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.





www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES
Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com

www.keysight.com/find/U4301B

www.keysight.com/find/U4305B

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System