



NETWORK EXPERTISE

SKY NG RADIO

*Overhead electric lines detector for
conveyor belt, concrete pump...*

**POWER
LINE
DETECTOR**



**COMPLETE RANGE OF
PRODUCTS AND NEWS ON
www.made-sa.com**

MADE S.A.

167, Impasse de la Garrigue · 83210 La Farlède
Tél. : +33 (0) 494 083 198 · Fax : +33 (0) 494 082 879
contact@made-sa.com

In order to improve their equipments, MADE is reserving its rights to modify the products described in that documentation, at any time and without prior notification.© No part of this work may be reproduced and distributed without MADEs prior written permission.


**MADE IN
FRANCE**



● SKY NG RADIO

Protect persons and property thanks to high voltage overhead electric lines detector !

SKY NG RADIO is a high voltage line detector : medium voltage (< 50 kV) and high voltage (> 50 kV). SKY NG RADIO operates on a proximity detection principle using several sensors, depending on the number of arms on the machine. It warns the operator by an audible signal and a warning light when the high lift equipment enters a high risk zone, with a warning distance that can be configured between 3 to 6 meters (10 to 17 feet) from a high voltage line. SKY NG RADIO is designed for concrete belts, pumps, mixer-pumps, auxiliary cranes, etc.

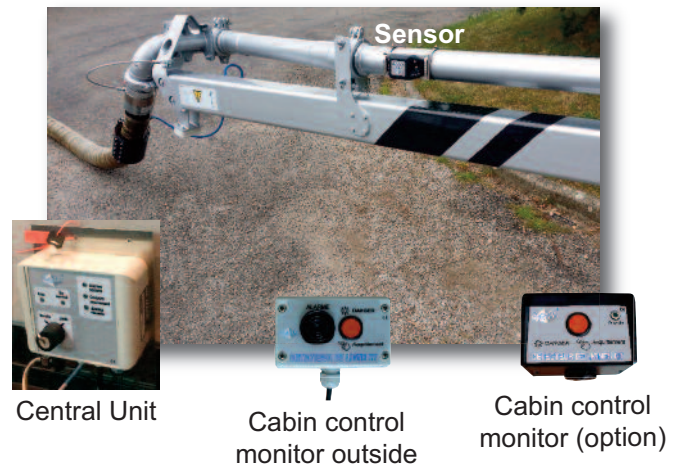

➤ OPERATING

SKY NG RADIO activates when the power take-off is engaged. The electrical field detection activates the audible alarms and visual alarms and can cause the stop of the motion (with effective cabling). The driver can turn off the audible alarm and the motion stopping (if effective) features for an hour by pushing the button “call-back mode”. The buzzers and the flashing lights remain active. After an hour, the system resets.

➤ TECHNICAL CHARACTERISTICS

- For a multi-sensors configuration, the configurable detection threshold upon installation varies from 3 to 6 meters (10 to 17 feet) from a high voltage line.
- Measurement precision : ± 1 meter (3 feet) while moving, with a speed of 1 m/s (3.3 feet/s).
- Power supply : 24 VDC or 12 VDC.
- Size : 160 x 85 x 45 mm (sensor), 160 x 130 x 60 mm (central unit), 145 x 85 x 90 mm (inside box of visualization) and 120 x 80 x 70 mm (outside box of visualization).
- Waterproof standard : IP65
- Temperature range : -20 °C to +60 °C.
- Self-test system at each power-on.
- The sensibility limits of the device does not allow to detect 230 V to 280 V power lines.
- The system does not detect the presence of direct current voltage.

Our systems are available for all types of vehicles subjected to a risk to work near electrical MV and HV overhead lines (mechanical excavators, cradles, tractors...)

