

HAAS-2000 HIGH ACCURACY ARRAY SPECTRORADIOMETER (Laboratory grade)



The World-leading Speed Spectroradiometer fully meets the requirements of the relevant standards, e.g. IESNA LM-79 and GB/T 24824. Due to millisecond measurement speed, HAAS-2000 can be used for not only steady state (DC) measurement, but also the transient (pulses) measurement for LEDs.

National High-Tech Program (863 program) Research Achievement,

Recognized as the Independent Innovation Product

National Key & New Product

US Patent Granted (No.: US 7,978,324 B2)

World leading Specifications:

Can measure the spectral of flash light $<1\mu\text{s}$;


0.3% Photometry Linearity;

Up to 0.01mcd sensitivity;

0.0015x, y accuracy;

5.00E-05 stray light level;

Schematic:

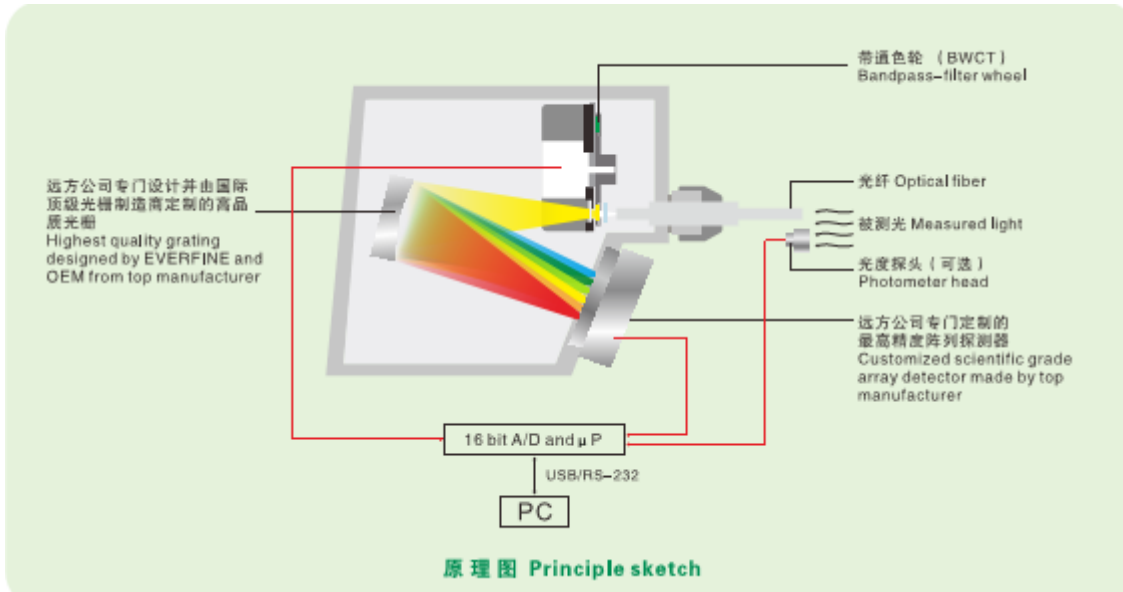

Model	HAAS-2000				
	VIS	UV	VIR	IR1	IR2
Optical bench					
Detector	TE-cooled CCD; CCD refrigeration temperature: -10°C; Stability: ±0.05°C; CCD pixel: 1024x128(Allow Binning mode)				
Grating	Holographic grating with flat field correction				
Slit width	100μm (Standard)				
Optical input	Fiber optics				
Spectral range	360-830nm, 380-780nm (Accurate mode)	200-450nm	380-1100nm	780-1650nm	1600-2550nm

Wavelength accuracy	$\pm 0.2\text{nm}$	$\pm 0.1\text{nm}$	$\pm 0.2\text{nm}$	$\pm 0.5\text{nm}$	$\pm 3\text{nm}$
---------------------	--------------------	--------------------	--------------------	--------------------	------------------

Fully meet the requirements of the relevant standards, such as IESNA LM-79, GB/T 24824 etc.

Single LED/Module Opto-Electronic Measurement system



Opto-Electronic Measurement system

