


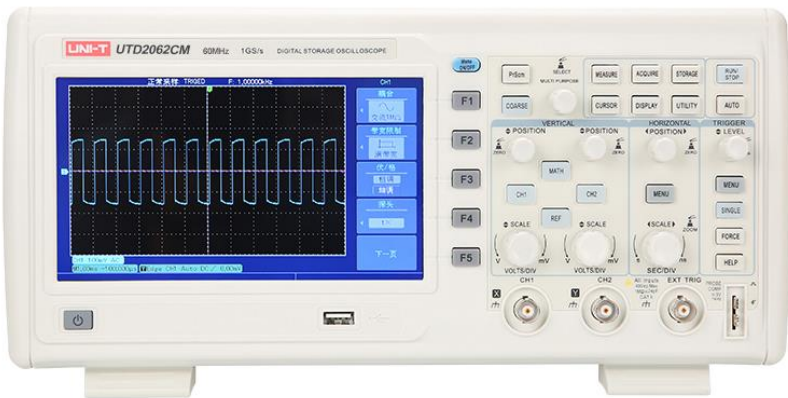

UTD2062CM Digital Storage Oscilloscope

Specifications	UTD2062CM
Channels	2
Bandwidth	60MHz
Sample Rate	1GS/s
Rise Time	≤5.8ns
Memory Depth	32Mpts
Waveform Acquisition Rate	≥150,000wfms/s
Vertical Sensitivity	2mV/div~10V/div
Timebase Range	2ns/div~50s/div

Storage	Setup, Wave, Bitmap, CSV
Trigger Modes	Edge, Pulse, Runt, Video, Slope, Alternate
Interface	USB Device, USB Host, Pass/Fail
General Characteristics	
Power	100~240VAC, 50/60Hz
Display	7 inches TFT LCD, WVGA (800×480)
Product Color	White and grey
Product Net Weight	2.9kg
Product Size (W×H×D)	332mm × 147mm × 170mm
Standard Accessories	Probex2 (1×,10× switchable), Power Cord, USB Cable
Standard Individual Packing	Gift Box
Standard Quantity Per Carton	2pcs
Standard Carton Measurement (L×W×H)	450mm × 420mm × 280mm
Standard Carton Gross Weight	9.3kg
Optional Accessories	LAN Port