


**No. 1518-00
WOODEN BASE PSYCHROMETER**

SPECIFICATIONS

Measuring range: -30 to 50°C
 Min. graduation: 1°C
 Accuracy: ±1°C
 Sensing element: Kerosene
 Materials (body): Wood
 Dimensions: 79 (W) x 271 (H) x 29 (D) mm
 Weight: Approx. 125 g
 Accessory: English manual

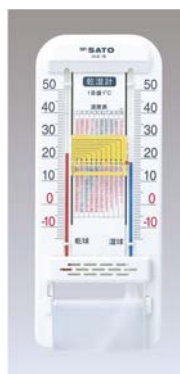

**No. 1519-00
PSYCHROMETER MODEL SK-1**

SPECIFICATIONS

Measuring range: -10 to 50°C
 Min. graduation: 1°C
 Accuracy: ±1°C
 Sensing element: Kerosene
 Materials (body): ABS resin
 Dimensions: 104 (W) x 260 (H) x 28 (D) mm
 Weight: Approx. 110 g
 Accessory: English manual



No. 1740-50 DIGITAL MIN-MAX THERMOMETER MODEL PC-3500

SPECIFICATIONS

Measuring range: -50 to 70°C (External Sensor)
 -5 to 50°C (Internal Sensor)
 Accuracy: ±1°C (0 to 40°C)
 ±2°C (other range)
 Drip-proof rate (probe): Conforms to JIS C 0920 IP:X4
 Cord length: 3 m
 Dimensions: 67 (W) x 65 (H) x 20 (D) mm
 Weight: Approx. 50 g (including a battery)
 Accessories: Button battery (LR44) x 1, external probe, English manual



No. 7308-00 MIN-MAX THERMOMETER WITH HYGROMETER

SPECIFICATIONS

Measuring range: Temperature: -30 to 50°C
 Humidity: 25 to 95%rh
 Min. graduation: Temperature: 2°C
 Humidity: 5%
 Accuracy: Temperature: ±2°C
 Humidity: ±5%rh (30 to 80%rh, 15 to 25°C)
 ±8%rh (other range)
 Materials: Body: ABS resin
 Window: Acrylic resin
 Dimensions: 180 (W) x 180 (H) x 35 (D) mm
 Weight: 240 g



No. 1069-00 DIGITAL THERMOHYGROMETER MODEL PC-7700II

SPECIFICATIONS

Measuring range: Temperature: -10 to 50°C
 Humidity: 20 to 95%rh
 Accuracy: Temperature: ±1°C (10 to 40°C)
 ±2°C (other range)
 Humidity: ±5%rh (15 to 35°C, 40 to 70%rh)
 ±7%rh (other range)
 Sensing elements: Temperature: Thermistor
 Humidity: High polymer resistance change type sensor
 Dimensions: 150 (W) x 85 (H) x 17 (D) mm
 Weight: 135 g (including a battery)
 Accessories: AAA battery x 1, English manual



No. 1747-50 WATERPROOF DIGITAL THERMOMETER MODEL PC-9215II

SPECIFICATIONS

Measuring range: -30 to 150°C
 Resolution: 0.1°C
 Accuracy: ±1°C (0 to 140°C)
 ±2°C (other range)
 Drip-proof rate: Conforms to JIS C 0920 IPX5
 Materials: Body/sheath: ABS resin
 Sensing stem: SUS304
 Dimensions: Display section: 47 (W) x 20 (T) x 176 (L) mm (including sensing part)
 Sensing part: 3.5 dia. x 116 (L) mm
 Weight: 25 g (including a battery)