

Bimetal Thermometer (Back connection)

Model

BM-T-40S/BM-T-60S/BM-T-70S/BM-T-90S

BIMETAL THERMOMETERS Model BM-T40S, BM-T-60S, BM-T-90S
(FOR ORDERING)



Specifications

Model BM-T-40S Cat. No. 2440-B	
Case dia.	44mm
Dial dia.	42mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304
Materials(Cover)	SUS304
Materials(Window)	Glass
Materials(Sensing stem)	SUS304
Sensing stem dia.	4,6,8,10mm
Screw	Please specify
Withstand pressure	2kgf/cm ²


Model BM-T-60S Cat. No. 2460-B	
Case dia.	63mm
Dial dia.	60mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304
Materials(Cover)	SUS304(buffing)
Materials(Window)	Glass(Acrylic is an option)
Materials(Sensing stem)	SUS304
Sensing stem dia.	6,8,10,12mm
Screw	Please specify
Withstand pressure	5kgf/cm ²

Model BM-T-70S Cat. No. 2470-B	
Case dia.	80mm
Dial dia.	70mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304

Model BM-T-90S Cat. No. 2490-B	
Case dia.	103mm
Dial dia.	90mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304

Materials(Cover)	SUS304(buffing)
Materials(Window)	Glass(Acryl is an option)
Materials(Sensing stem)	SUS304
Sensing stem dia.	6,8,10,12mm
Screw	Please specify
Withstand pressure	5kgf/cm2

Materials(Cover)	SUS304(buffing)
Materials(Window)	Glass(Acryl is an option)
Materials(Sensing stem)	SUS304
Sensing stem dia.	6,8,10,12mm
Screw	Please specify
Withstand pressure	5kgf/cm2

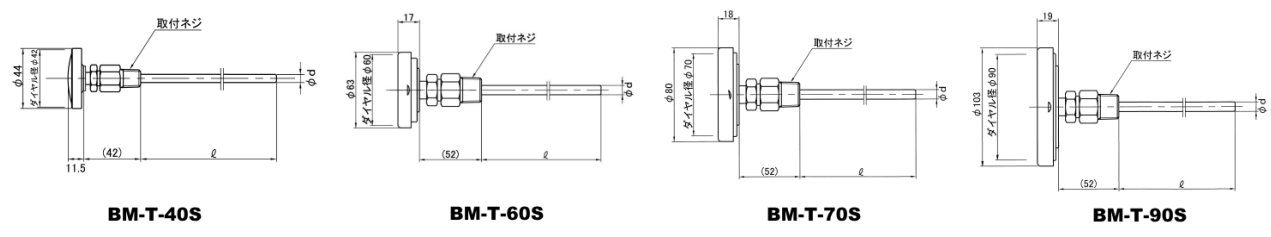

Order form (same for all series)

Ex. BM-T-70S - 2470-B - 200 - SW S10B300 SUS304 - PT3/4 SUS304

Model	Cat. No.	Measuring range	Sensing stem(Type, dia., materials)	Screw(Type, Materials)