

# Bimetal Thermometers (Bottom connection)



Model

## BM-S-60S/BM-S-70S/BM-S-90S


BM-S-60S/BM-S-70S/BM-S-90S BIMETAL THERMOMETERS (FOR ORDERING)

### Specifications


Model BM-S-60S Cat. No. 2465-B	
Case dia.	63mm
Dial dia.	60mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304
Materials(Cover)	SUS304(buf fing)
Materials(Window)	Glass(Acrylic is an option)
Materials(Sensing stem)	SUS304
Sensing stem dia.	6,8,10,12mm
Screw	Please specify
Withstand pressure	5kgf/cm <sup>2</sup>

Model BM-S-70S Cat. No. 2475-B	
Case dia.	80mm
Dial dia.	70mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304
Materials(Cover)	SUS304(buf fing)
Materials(Window)	Glass(Acrylic is an option)
Materials(Sensing stem)	SUS304
Sensing stem dia.	6,8,10,12mm
Screw	Please specify
Withstand pressure	5kgf/cm <sup>2</sup>


Model BM-S-90S Cat. No. 2495-B	
Case dia.	103mm
Dial dia.	90mm
Waterproof properties	Compliant to JIS C 0920 IPX1
Materials(Case)	SUS304
Materials(Cover)	SUS304(buf fing)
Materials(Window)	Glass(Acrylic is an option)
Materials(Sensing stem)	SUS304
Sensing stem dia.	6,8,10,12mm
Screw	Please specify
Withstand pressure	5kgf/cm <sup>2</sup>

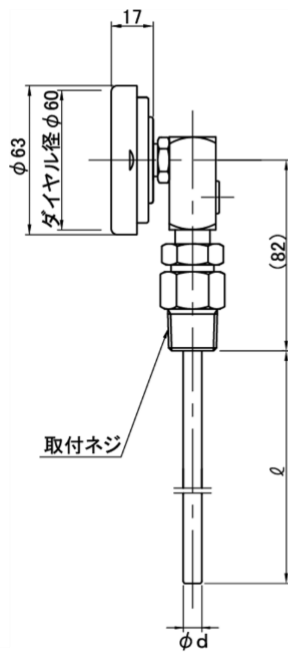

**BM-S-60S**

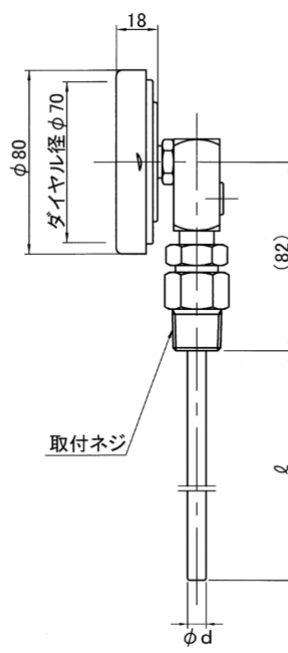

**BM-S-70S**

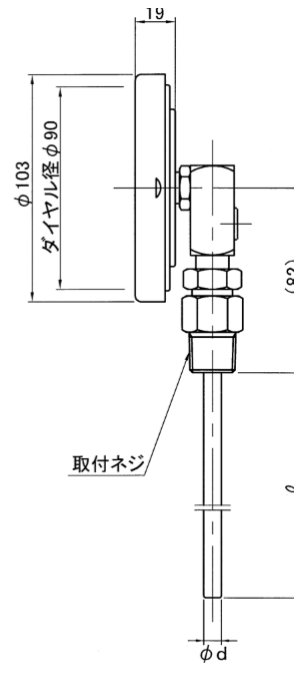

**BM-S-90S**

**Ordering form**

Ex,	BM-S-70S	-	2475-B	-	200	-	UW S15B200 SUS316	-	PT3/4 SUS316
	Model		Cat. No.		Measurement range		Sensing stem(Type, dia., materials)		Screw(Type, Materials)