

Remote Sensing Dial Thermometer LB-75S/LB-100S/LB-150S (For ordering)

Model

LB-75S, LB-100S, LB-150S

Wall-mount bottom outlet type remote sensing dial thermometers. We can produce these models of the specifications to order.






Specifications

LB-75S Cat. No. 3050-L(Solid liquid)	
Case dia.	80mm
Dial dia.	75mm
Case structure	JIS C 0920 IPX1
Case material	SUS304
Finishing (Case)	Buffing
Material (Window)	Glass or Acryl
(Sensing stem)	SUS304
(Lead wire)	SUS304
Mounting pitch	P.C.D.95
Mounting holes	3 x 5.5mm dia

LB-100S Cat. No. 3010-L (Solid liquid)	
Case dia.	110mm
Dial dia.	100mm
Case structure	JIS C 0920 IPX1
Case material	SUS304
Finishing (Case)	Electropolishing
Material (Window)	Glass or Acryl
(Sensing stem)	SUS304
(Lead wire)	SUS304
Mounting pitch	P.C.D.122
Mounting holes	3 x 5.5mm dia

LB-150S Cat. No. 3020-L (Solid liquid)	
Case dia.	154mm dia.
Dial dia.	150mm dia.
Case structure	Indoor use
Case material	SUS304
Finishing (Case)	Honing
Material (Window)	Glass or Acryl
(Sensing stem)	SUS304
(Lead wire)	SUS304
Mounting pitch	refer to drw
Mounting holes	3 x 8mm dia

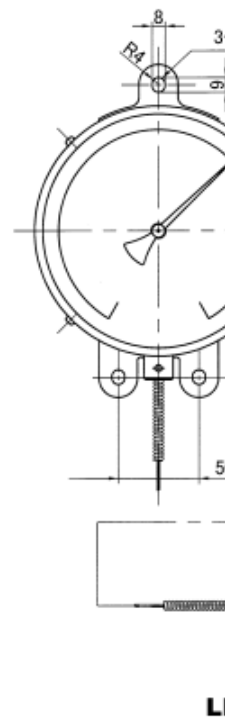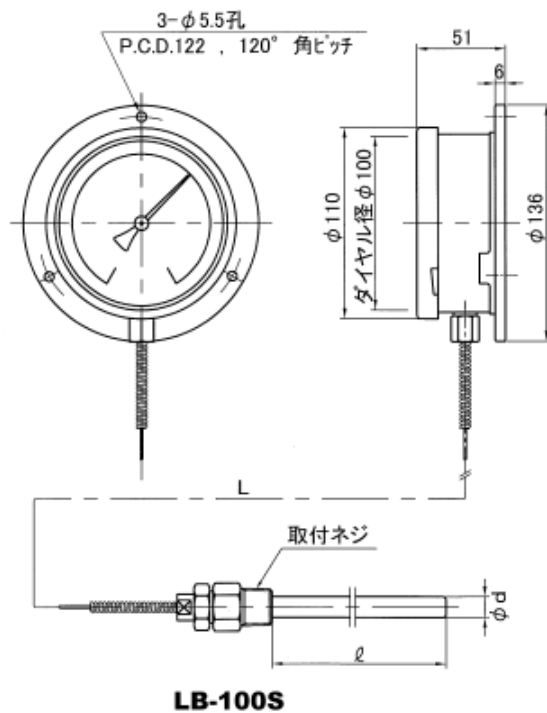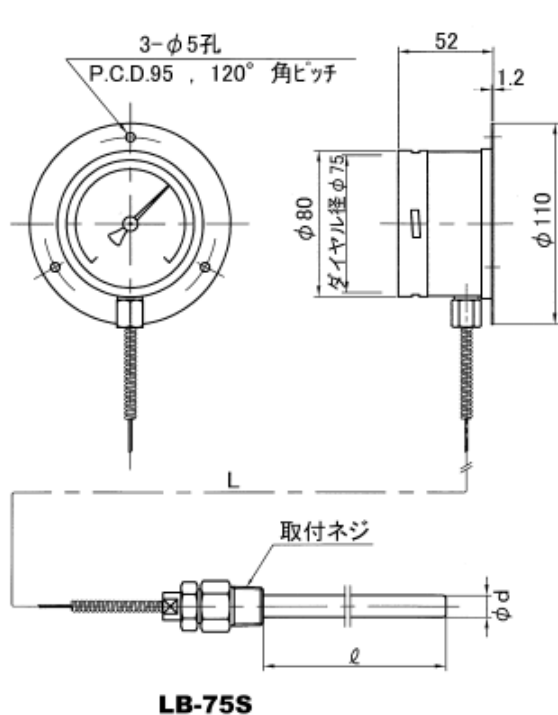

Format for ordering

Ex. LB-
100S - 3010-L - 200 - FS3 - SW S12B200 SUS303 - PT3/4 SUS304

Model	Cat. No.	Range	Lead wire	Sensing stem (Type, dia. L)	Screw (Type, material)