

Flush-mount Remote Sensing Dial Thermometer Model LD-75S/LD-100S (For ordering)



Model

LD-75S/LD-100S

Flush-mount type remote sensing dial thermometers. We can produce these models of the specifications to order. (Model LD-75S, LD-100S)

Specifications

LD-75S


Cat. No. 3060-L (Solid liquid)

Case dia.	80mm
Dial dia.	75mm
Case construction	JIS C 0920 IPX1
Material (Case)	SUS304
Finishing	Buffing
Materials (Window)	Glass (option: Acryl)
(Sensing stem)	SUS304
(Lead wire)	SUS304
Mounting pitch	P.C.D.95
Mounting holes	3 x 5mm dia.


LD-100S

Cat. No. 3030-L (Solid liquid)

Case dia.	110mm
Dial dia.	100mm
Case construction	JIS C 0920 IPX1
Material (Case)	SUS304
Finishing	Electropolishing
Materials (Window)	Glass (option: Acryl)
(Sensing stem)	SUS304
(Lead wire)	SUS304
Mounting pitch	P.C.D.122
Mounting holes	3 x 5.5mm dia.

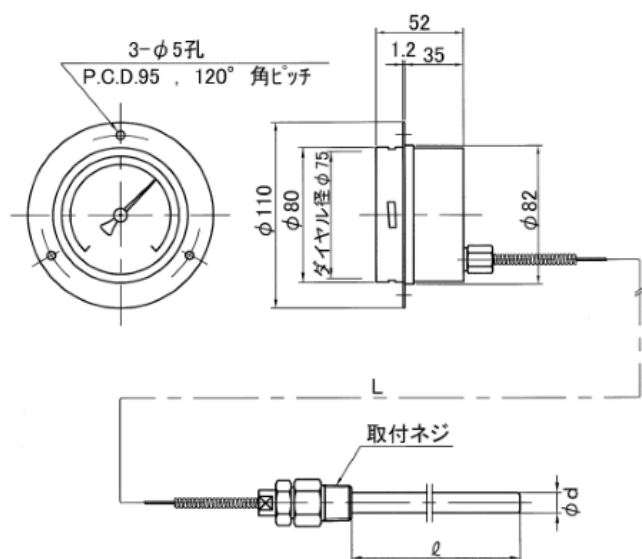

LD-75S

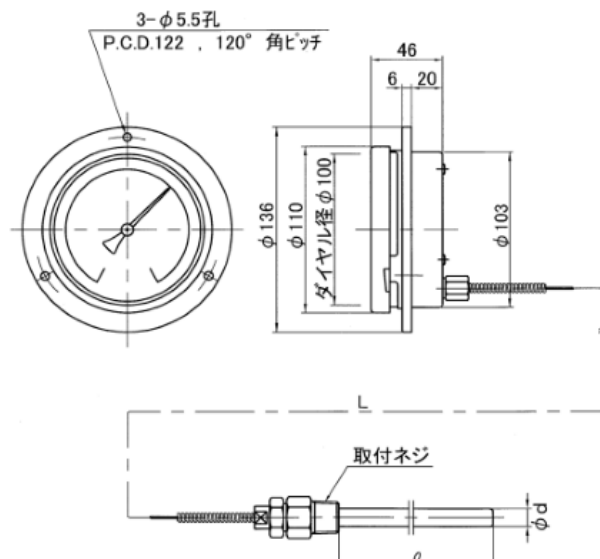

LD-100S

Ordering form

Ex. LD-75S iY 3060-L iY 150 iY FS4 iY SW S12B500 SUS304 iY PT1/2 SUS304

Model	Cat. No.	Range	Lead wire	Sensing stem (Type, dia., L)	Screw (kind, materials)