

# Flush-mount Remote Sensing Dial Thermometer with Electric contact LD-75E/LD-100SE

Model

## LD-75E/LD-100SE


Produced to order. Flush-mount type remote sensing dial thermometer with electric contact. For dial dia. 75mm: Model LD-75E, For dial dia. 100mm: Model LD-100SE



### Specifications

LD-75E Cat. No. 3160-L (Solid liquid)	
Case dia.	85mm
Dial dia.	75mm
Case design	Indoor use
Material (Case)	Aluminum casting
Finishing	Black melamine baked plating
Window	Acryl
Contact method	Electric contact type
Contact capacity	100VAC-0.3A 100VDC-0.02A
Contact adjustment	External or internal adjustment
Wiring	Terminal block
Mounting pitch	P.C.D.94
Hole for mount	3 pcs. (5mm dia. )

LD-100SE Cat. No. 3130-L (Solid liquid)	
Case dia.	110mm
Dial dia.	100mm
Case design	Indoor use
Material (Case)	SUS304
Finishing	Electropolishing
Window	Acryl
Contact method	Electric contact type
Contact capacity	100VAC-0.3A 100VDC-0.02A
Contact adjustment	External or internal adjustment
Wiring	Terminal block
Mounting pitch	P.C.D.122
Hole for mount	3×Ø5

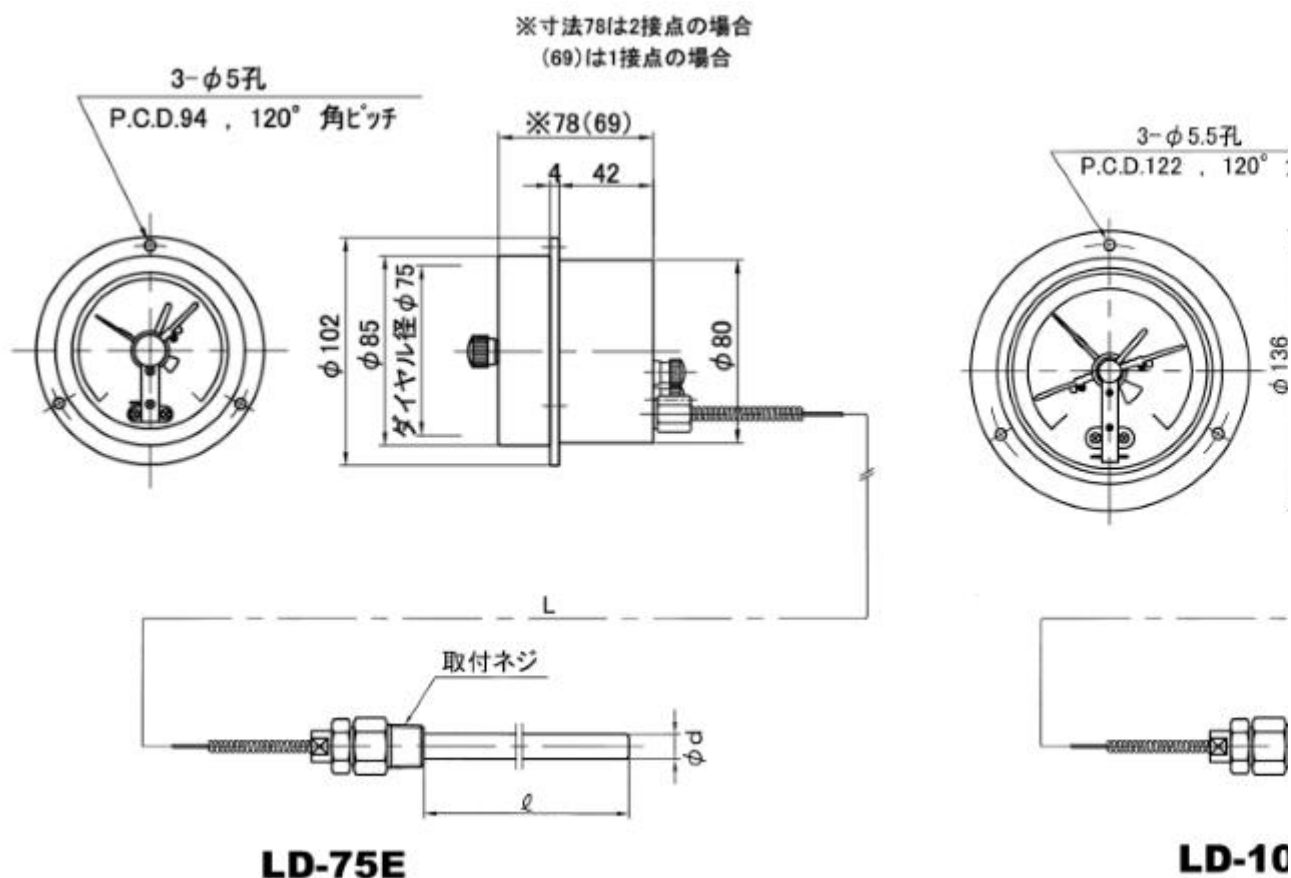

## Ordering form

Ex. LD-  
100SE - 3130-L - 200 - CUL1 - FS2 - SW S12B300 - PT1/2  
SUS304 SUS304

Model	Cat. No.	Temp. range	Contact	Lead wire	Sensing stem	Screw
-------	-------------	-------------	---------	-----------	--------------	-------

