


THE ASIA'S TECHNOLOGY LEADER

A SINGLE-SOURCE SUPPLIER OF STRAPPING MACHINE



THE ASIA'S TECHNOLOGY LEADER

A SINGLE-SOURCE SUPPLIER OF STRAPPING MACHINE

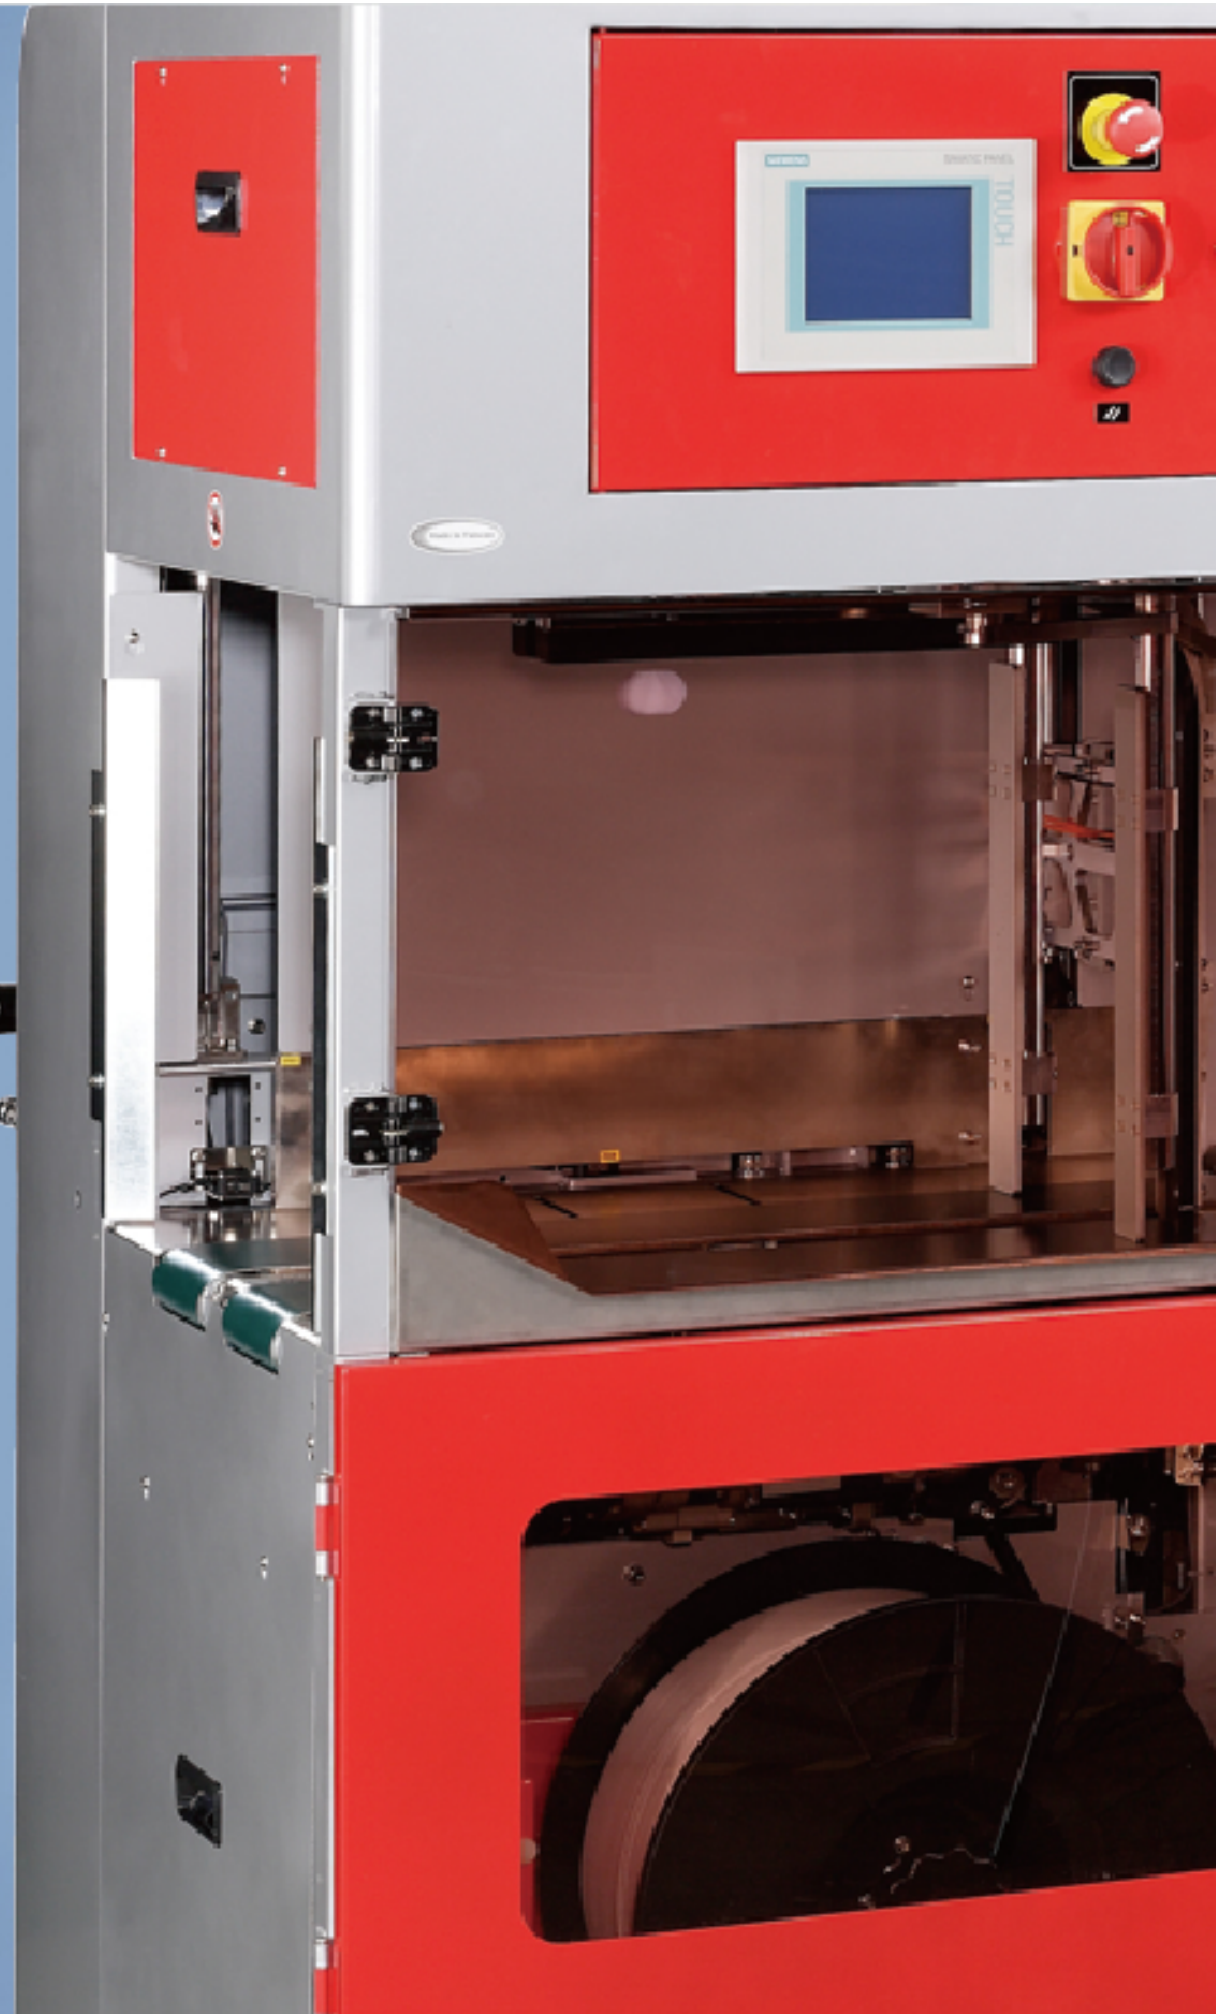

[Home](#) > [PRODUCTS](#) > [Corrugated Strapping Machines](#) > [TP-CIL TransCorrLiner Inline Strapping and Squaring System](#)

PRODUCTS

- [Strapping Tools](#)
- [Semi-Auto Strapping Machines](#)
- [Automatic Strapping Machines](#)
- [Fully Automatic Strapping Machines](#)
- [Corrugated Strapping Machines](#)
- [Print Media Strapping Machines](#)
- [Side-Seal Strapping Machines](#)
- [Pallet Strapping Machines](#)
- [Strapping Heads](#)

TP-CIL TransCorrLiner Inline Strapping and Squaring System



TransCorrLiner TP-CIL is a high speed corrugated inline squaring and strapping system which meets the speed requirement of the fastest Flexo Folder Gluer and Casemaker. TP-CIL uses the latest brushless DC motor direct drive technology in sealing head, needle, squaring devices, and off-center strapping to provide the highest level of reliability and durability. In addition, the intelligent self-positioned pusher detects bundle length automatically to streamline production process and increase strapping speed.



[INQUIRY](#)

Features


- Compact & robust strapping head
- Intelligent pusher optimizes speed (*patents registered*)
- Automatic bundle size setup system
- Independent controlled conveyor
- Strapping in the flute direction
- Siemens PLC and HMI
- Off-center strapping
- Hot standby mode (twin head model only)
- Drape-strap feeding system

- Powered alignment device
- Dual dispenser with auto splicer
- Air conditioner for control box
- Belt driven conveyor for the last bundle
- Energy saving transit with auto sleep mode
- Bus interface for bundle size data transfer from upstream equipment
- Gravity wheel conveyor

Stack Sizes

Models	Width A (mm)		Length B (mm)		Height C (mm)	
	min	max	min	max	min	max
TP-CIL-13S	240	1300	180	1300	50	350
TP-CIL-13T	450	1300	180	1300	50	350
TP-CIL-16S	270	1600	180	1600	50	350
TP-CIL-16T	450	1600	180	1600	50	350

S(single) : one strapping head
T(twin) : two strapping heads

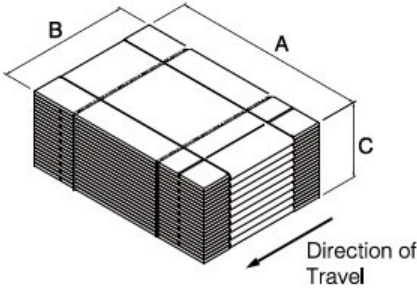

Technical Data

Capacity	Up to 24 bundles/minute (Model: TP-CIL-13S & TP-CIL-13T)
Strap Width	5 mm, 6 mm, 8 mm, or 9 mm
Tension Range	1 - 20 kg
Bundle Weight	max 30 kg
Conveyor Height	780 - 1080 mm
Conveyor Speed	30 - 70 m/minute
Electrical Requirements	220V, 380V, 400V, 415V 50/60Hz 3PH

Video

TP-CIL TransCorrLiner Corrugated Strapper, Corrugated Bundler - TRANSPAK



ALL PRODUCTS ARE WELL MADE BY OUR ISO 9001 CERTIFIED FACTORY IN TAIWAN, WITH PRIDE.