

75 Ohm BNC Female to F Female Bulkhead Adapter

Electrical Specifications

Frequency Range DC to 1,000 MHz

Mechanical Specifications

Size
Length 1.299 in [32.99 mm]
Width 0.551 in [14 mm]

Connector 1

Type BNC Female
Inner Conductor Material and Plating Beryllium Copper, Gold
Body Material and Plating Brass, Nickel
Dielectric Type PTFE

Connector 2

Type F Female
Inner Conductor Material and Plating Beryllium Copper, Gold
Body Material and Plating Brass, Nickel
Dielectric Type PTFE

Environmental Specifications

Temperature
Operating Range -55 to +125 deg C


Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes
REACH Compliant 06/16/2014

Plotted and Other Data

Notes:
• Values at 25 °C, sea level

Typical Performance Data

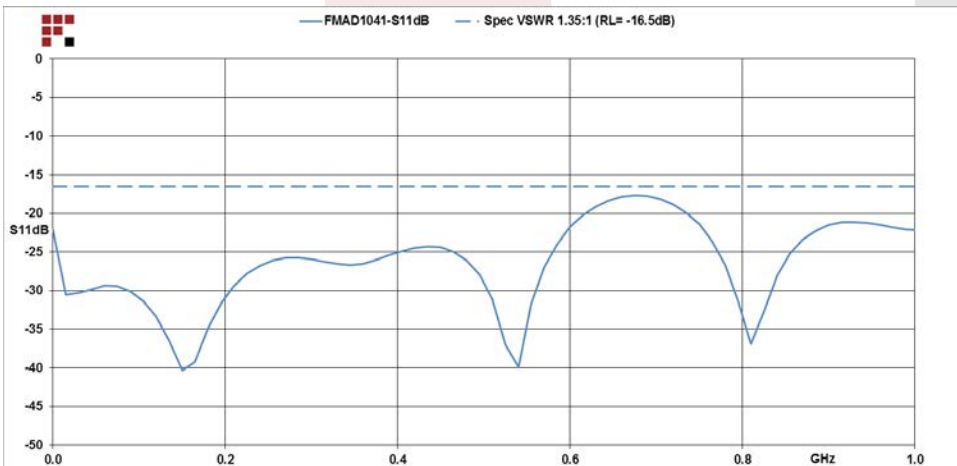

Features:

- Connector 1: BNC Female
- Impedance 1: 75 Ohms
- Connector 2: F Female
- Impedance 2: 75 Ohms
- Adapter Design: Standard
- Body Style: Straight
- Mount Method: Bulkhead

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


75 Ohm BNC Female to F Female Bulkhead Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [75 Ohm BNC Female to F Female Bulkhead Adapter FMAD1041](#)

URL: <http://www.fairviewmicrowave.com/75-ohm-bnc-female-f-female-bulkhead-adapter-fmad1041-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



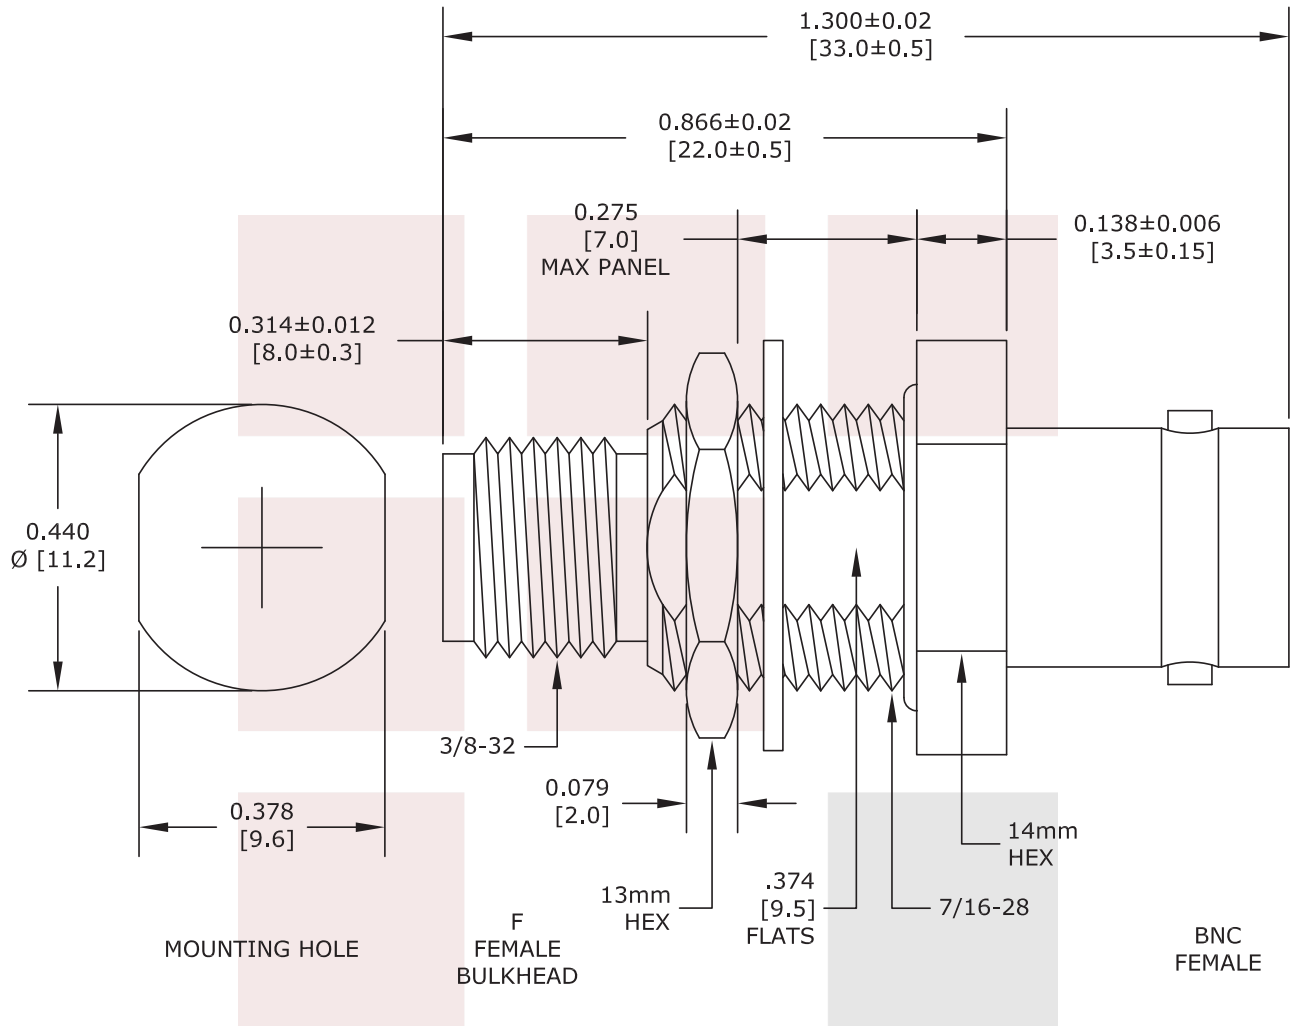

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 75 Ohm BNC Female to F Female Bulkhead Adapter		DWG NO FMAD1041		CAGE CODE 3FKR5	
CAD FILE	102014	SHEET	SCALE	N/A	SIZE A 150