

SA18S25W-10 DATA SHEET

10 dB Fixed Attenuator SMA Male To SMA Female Up To 18 GHz Rated To 25 Watts With Black Aluminum Heatsink Body

Fairview Microwave carries a broad selection of fixed attenuators with a wide range of attenuation levels, frequency ranges, and power dissipation ranges. Also known as RF pads, RF microwave attenuators lower the amplitude of a signal (or attenuate) a known amount. These attenuator pads can be used in a wide variety of applications including reducing a signal level to protect measurement equipment or other circuitry, extending the range of power meters and amplifiers, and impedance matching circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Fairview Microwave carries one of the largest in-stock varieties and ships them same day. The SA18S25W-10 is a 10 dB Fixed Attenuator that operates from DC to 18 GHz and is rated to 25 Watts. The versatile coaxial package uses SMA male to SMA female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

Electrical Specifications

Description	Min	Тур	Мах	Units		
Frequency Range	DC		18	GHz		
Impedance		50		Ohms		
Nominal Attenuation		10		dB		
Attenuation Accuracy		±1		dB		
VSWR			1.35:1			
Input Power, CW			25	Watts		
rated at +25°C, derate	ed linearly to	2.5W at +1	25°C			
Input Power, Peak			1	KWatts		
5µs pulse, 2.5% duty	cycle					
	<u> </u>					
Electrical Specification I	Notes:					
Values at +25°C, sea le						
chanical Specificati	ons					
Size			[]]]]			
			2.85 in [72.39 mm] 1.5 in [38.1 mm]			
Weight Body Material and Platin	0.1695 lbs [76.88 g] Black Anodized Aluminum He		m Heatsink			
bouy Material and Flath	ing	DIACK F	Allouizeu Aluminu	in neatsink		
Configuration						
		Fixed	Fixed, Bidirectional Connectorized Module			
Design Package Style		,				



Features:

- Bidirectional
- DC to 18 GHz Frequency Range
- Attenuation 10±1 dB
- Max Power 25 Watts (CW)
- VSWR < 1.35:1

Applications:

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678





Connectors

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Female
Connector Spec.	MIL-STD-348A	MIL-STD-348A
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Material & Plating	Passivated Stainless Steel	Passivated Stainless Steel

Environmental Specifications

Temperature Operating Range


-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

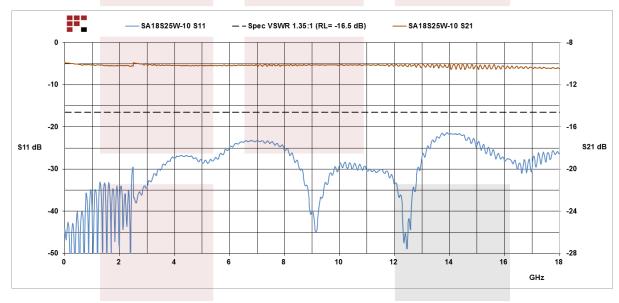

10 dB Fixed Attenuator SMA Male To SMA Female Up To 18 GHz Rated To 25 Watts With Black Aluminum Heatsink Body from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 10 dB Fixed Attenuator SMA Male To SMA Female Up To 18 GHz Rated To 25 Watts With Black Aluminum Heatsink Body SA18S25W-10


URL: https://www.fairviewmicrowave.com/10db-fixed-attenuator-sma-male-sma-female-25-watts-sa18s25w-10-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





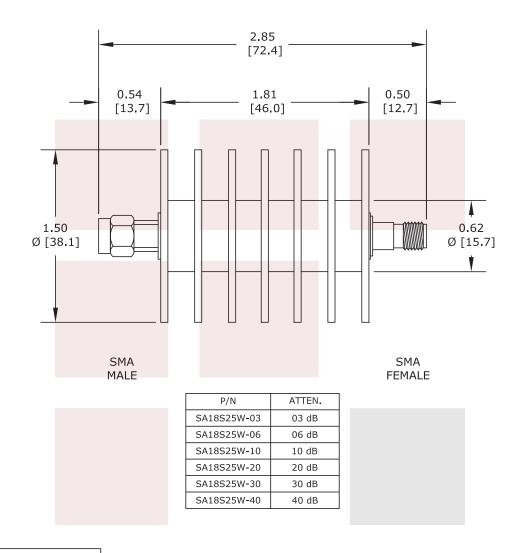

STANDAF	RD TOLERANCES
DECIMAL	
.XX	±0.01
.XXX	±0.003

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
10 dB Fixed Attenuator SMA Male To SMA Female Up To 18 GHz Rated To 25 Watts With Black Aluminum Heatsink Body	DWG NO SA18S25W			CAGE CODE 3FKR5		
	CAD FILE 032116	SHEET	SCALE	N/A	SIZE A	3045

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689