

TC-93480A Waveguide Adapter



Features

- Ka Band 26.5 GHz ~ 40 GHz Frequency Range
- K-Type 2.92 mm Female RF Interface
- WR-28 Waveguide Interface with Precision Tolerance FBP320 flange

Specifications

Configurations

Antenna Type	Rectangular Horn Antenna
Frequency Range	26.5 GHz to 40 GHz
RF Connector	
Connector type	2.92 mm (K-Type) Female
Body Material and Plating	Stainless Steel



Electrical Specifications

Frequency Range	26.5 GHz to 40 GHz
Insertion Loss	<0.4 dB
VSWR	< 1.7
Impedance	50 Ω

Mechanical Specifications

Size (mm)	
Length x Width x Height	24 x 32 x 32 mm
Weight	approx. 46 g

Typical Performance Data

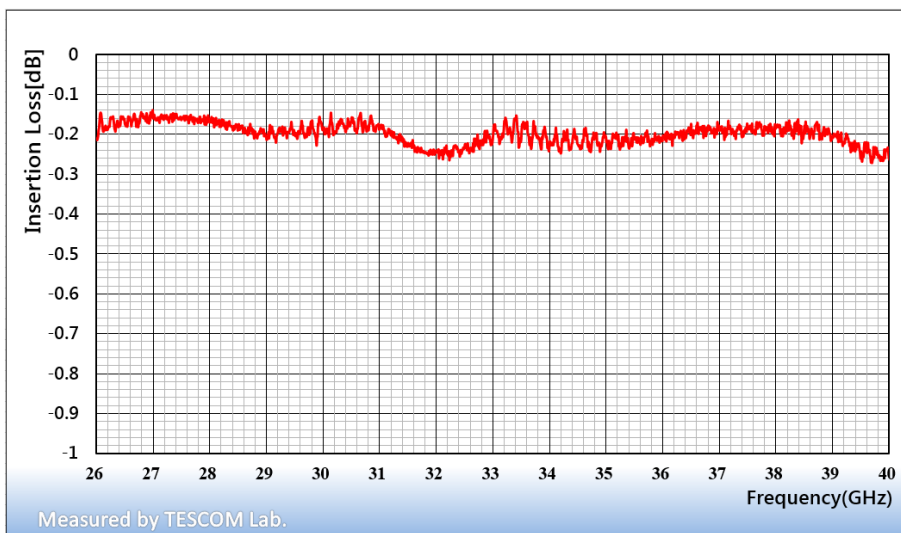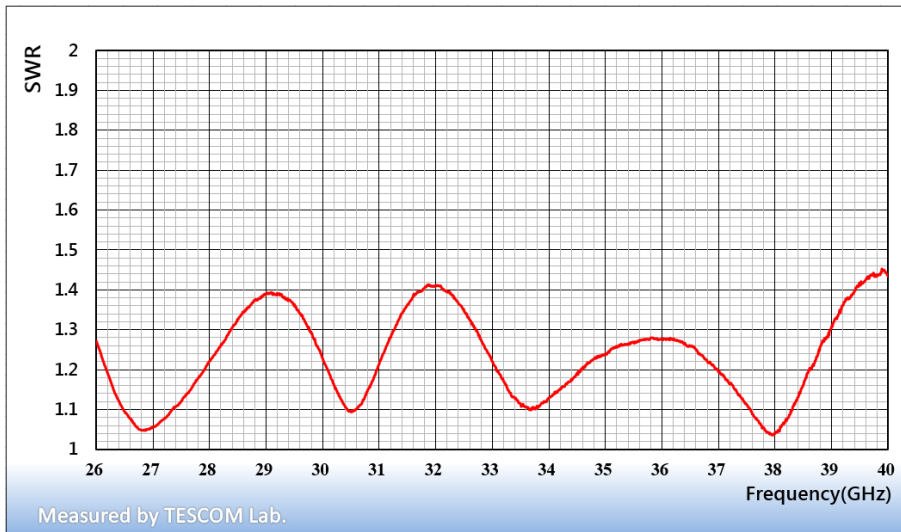

Ordering Information

Order Number	Description
TC-93480A	Waveguide Adapter(WR28 to 2.92mm) - Cable Not Included